SLVtec® 2026

SLV TECHNICAL LIGHTING CATALOGUE

STAY WELL-INFORMED

Scan QR code and get our latest prices.
Visit us at **ks-lys.dk**

EASY TO INSTALL EFFICIENT MULTIFUNCTIONAL

INDOOR

EASYLIGHT **06**
RETRO **26**
PANEL **40**
PAVANNO **48**
MOUNTING FRAMES **52**
DOWNLIGHT **54**
UNIVERSAL DOWNLIGHT **62**
WORKLIGHT LINE P **64**
BATTEN **68**
BATTEN FLAT **72**
BATTEN INDUSTRY **80**
TRACKSPOT **88**
TRACK LINE **128**
TRACK PANEL **122**
S-TRACK **124**
SURFACE **136**
HIGHBAY **138**
LED EMERGENCY KIT **142**

OUTDOOR


BULKHEAD **144**
FLOODLIGHT **146**
TUBULAR **149**
WATERPROOF **154**
STREET A **164**

DESIGNED FOR PROJECTS.

As a reliable partner for electrical installers and the specialist retailers, we are constantly developing our product range – practical, future-oriented and with a clear focus on your day-to-day challenges. With SLVtec®, we bring together our technical expertise in a standalone portfolio for professional, project-based lighting. SLVtec® stands for functional and energy-efficient lighting solutions that have been specially developed for industrial, office and retail applications.

SLVtec® products combine uncompromising quality with innovative features, high availability and quick, straightforward installation. For every application – from new-build projects to refurbishment: With SLVtec® you can master any project confidently and efficiently.

THE RIGHT PERFORMANCE CLASS FOR EVERY PROJECT

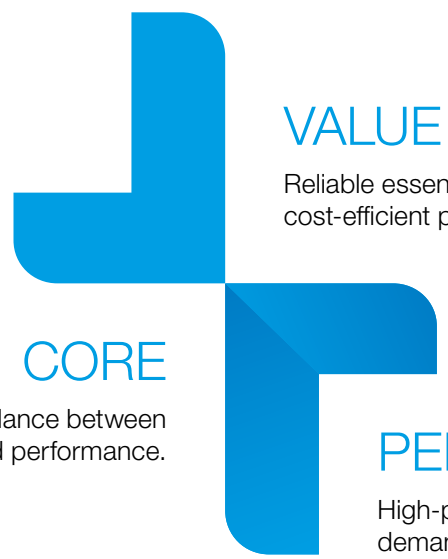

VALUE

Reliable essentials for cost-efficient projects.

CORE

The perfect balance between price and performance.


PERFORMANCE

High-performance lighting for demanding projects.

Whether you are looking for cost-efficient basic lighting, the ideal balance between price and performance or sophisticated lighting solutions: SLVtec® has just what you need. All our products combine innovative technology, efficient light output and versatile applications for professionals who rely on performance and quality every day.


EASY INSTALLATION. DELIVERING REAL COST-EFFECTIVENESS IN EVERY PROJECT.

The efficiency of modern technology is most apparent in practical use. SLVtec® products are consistently designed to streamline planning, installation and operation – with well-thought-out features that make your day-to-day work noticeably easier.

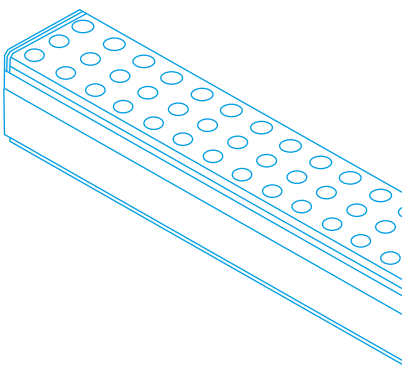

Easy to install: Intelligent mounting systems, tool-free cabling and innovative quick-release connectors make installation quick and easy, saving time and effort on the building site. Multi-lumen and multi-colour functions also ensure that fewer variants are required and that lights can be flexibly adapted to different project requirements.

Outstanding energy efficiency: Cost-effective project solutions: High efficiency ratings, long lifespans and well-thought-out product designs help to make investments predictable in the long term. With luminous efficacy of up to 200 lm/W and a lifespan of up to 100,000 hours, SLVtec® products make a significant contribution to energy-efficient and cost-effective lighting solutions.

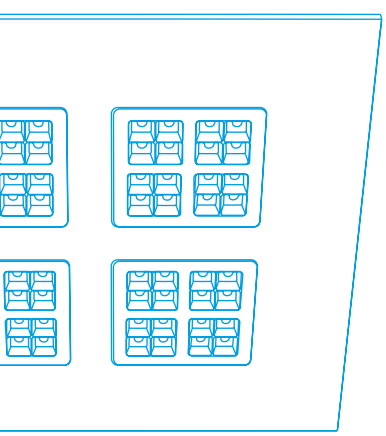

FLEXIBLY INTEGRATED EMERGENCY LIGHTING

Many product families in the SLVtec® range already feature an integrated emergency lighting function. For all other applications, the LED Emergency Kit offers a simple and flexible solution for quickly and easily upgrading existing fittings with emergency lighting. This allows lighting systems to be planned in line with the specific project requirements and, where necessary, efficiently adapted to safety-related requirements – without the need for additional emergency lights or costly retrofits.

THE RIGHT SOLUTION FOR YOUR NEXT PROJECT

From standard applications to complex special cases: Discover the SLVtec® range of efficient and practical lighting solutions for a wide variety of applications. Your next project starts here – get in touch with us or find out more at slv.com.

Scan, discover, get started –
with the right SLVtec® solution for your project at slv.com

EASYLIGHT

Efficient. Flexible. Systematic.


From industrial halls to supermarkets and logistics centres: EASYLIGHT is the high performance LED continuous-row lighting system for applications where flexibility, efficiency and reliability are required.

With an impressive efficiency of up to 200 lm/W, EASYLIGHT provides energy- and cost efficient lighting. Thanks to the innovative quick-fit system, EASYLIGHT can be installed in next to no time, significantly reducing your project times. The sophisticated design fits seamlessly into a wide range of applications. And with a lifespan of up to 100,000 hours, EASYLIGHT not only reduces maintenance costs, but also your operating costs in the long term.


EASYLIGHT AT A GLANCE

Up to 200 lm/W – particularly energy-efficient
Tool-free assembly – saving time and effort
Power and CCT switch – adjustable system power and light colour
Different beam angles, lengths and mounting options – can be combined flexibly
Seamless connection – continuous line of light


EASY TO INSTALL

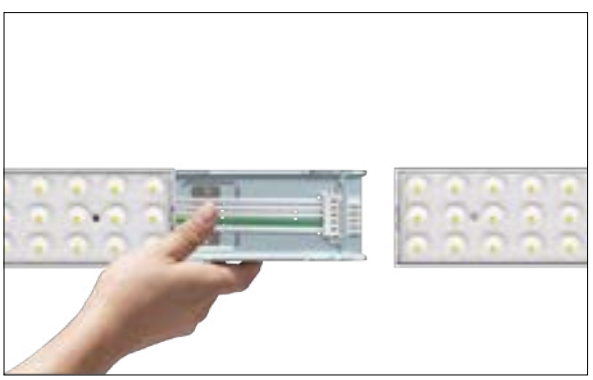



Quick, tool-free installation - electrical and mechanical connection of modules and lighting units in a single step.

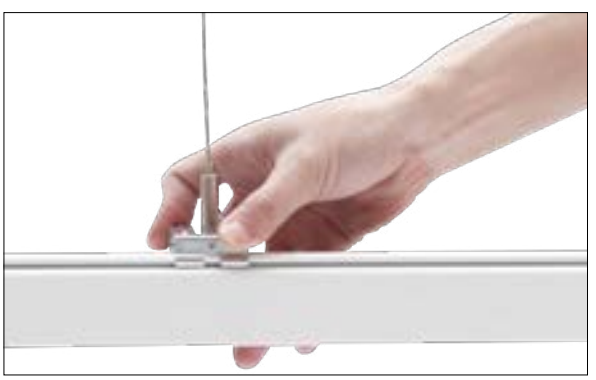


Chain or cable suspension is equally quick and tool-free, for flexible adaptation to a wide range of building situations.

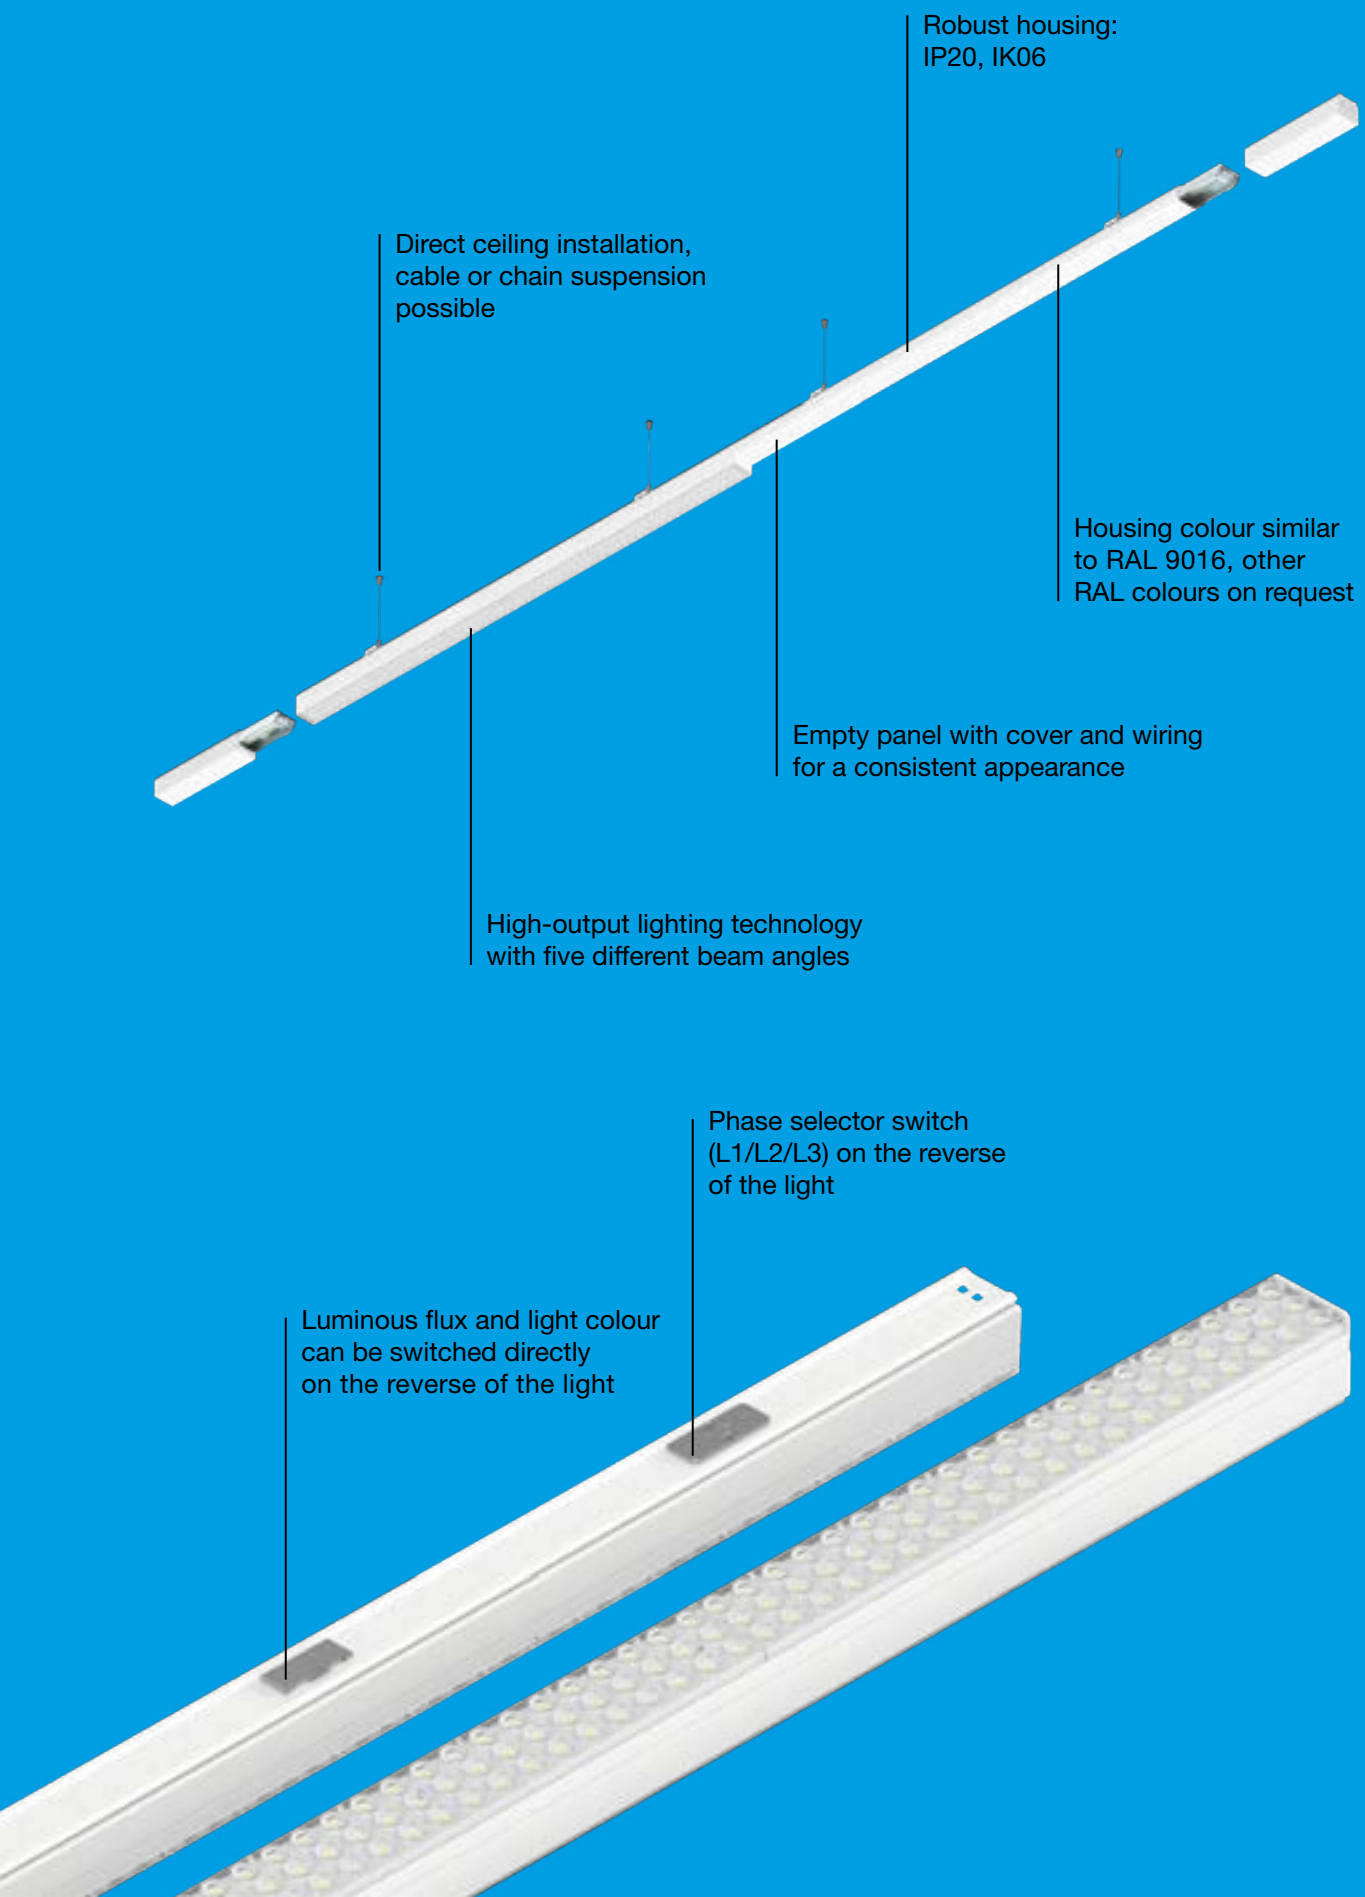
Robust housing:
IP20, IK06
Direct ceiling installation,
cable or chain suspension
possible
Housing colour similar
to RAL 9016, other
RAL colours on request
Empty panel with cover and wiring
for a consistent appearance
High-output lighting technology
with five different beam angles
Phase selector switch
(L1/L2/L3) on the reverse
of the light
Luminous flux and light colour
can be switched directly
on the reverse of the light

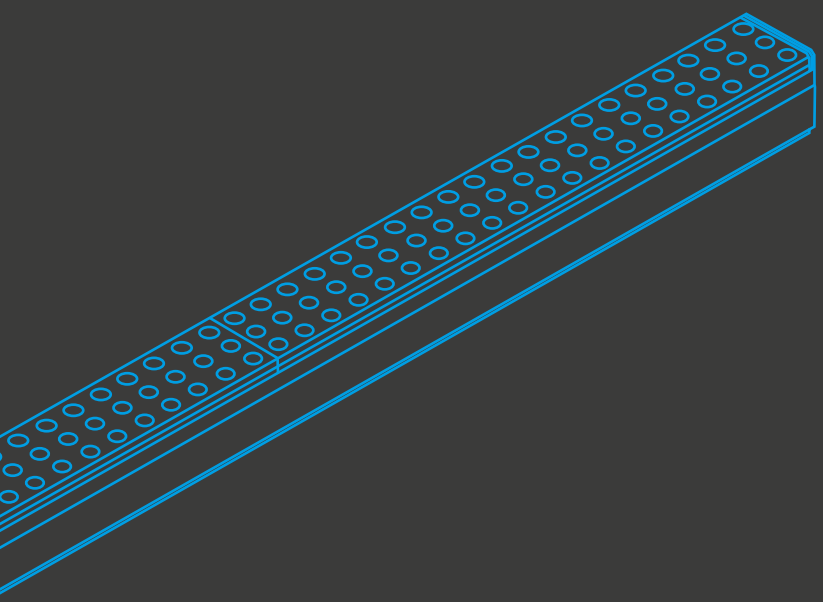

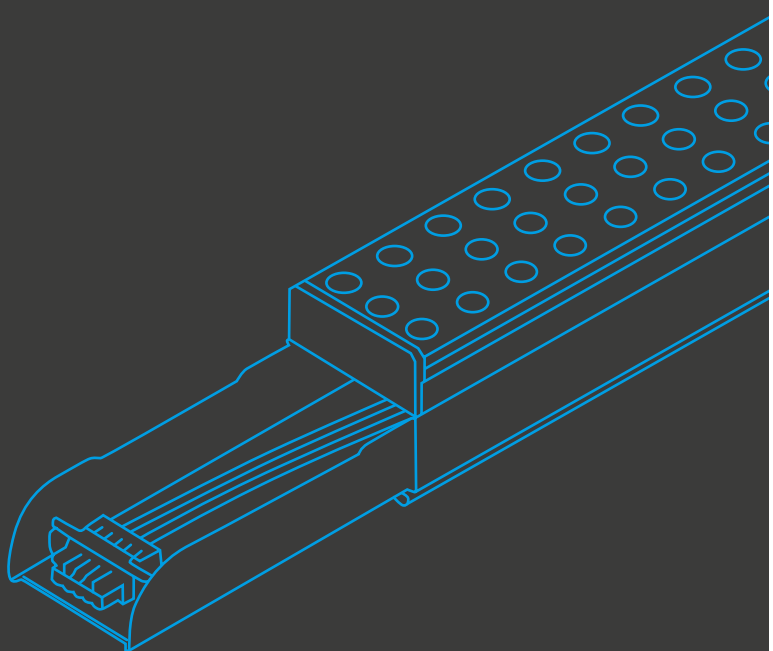

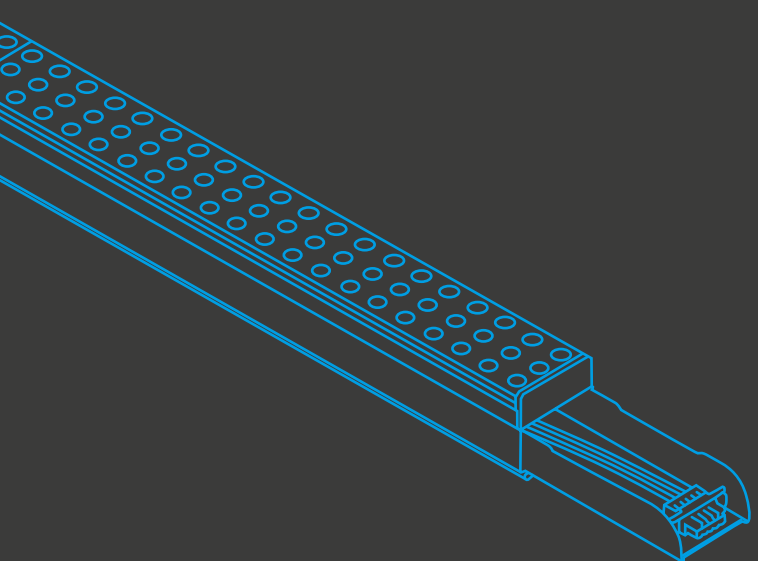

COMBINE



EASYLIGHT

+



Accessories for various installation methods: Surface-mounted, cable or chain suspension

=



EASYLIGHT

up to
200 lm/W

PRODUCT ADVANTAGES

High energy saving thanks to **efficiency of up to 200 lm/W**

Lifespan of up to **100,000 hours**

Available in five different beam angles. Other beam angles are available on request

EASY TO INSTALL thanks to tool-free assembly

Flexible and adaptable thanks to **Multi-Lumen** and **Multi-Colour**

DALI dimmable


DC-compatible

BEG-eligible

MULTI LUMEN **MULTI COLOR**


BEAM ANGLE

WB: Wide-beam

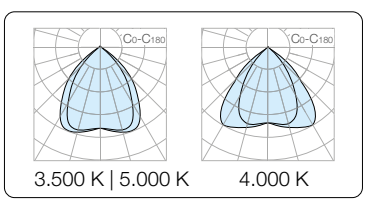

Wide light distribution for open areas such as supermarkets, logistics areas and showrooms. Ideal for uniform ambient lighting.


DA30: Double asymmetric*

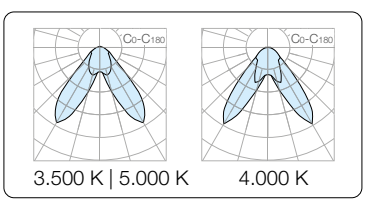

Double asymmetric, laterally directed light distribution for targeted illumination of wall surfaces, shelves or presentation zones – ideal for supermarkets or display areas.




MB: Medium-wide beam

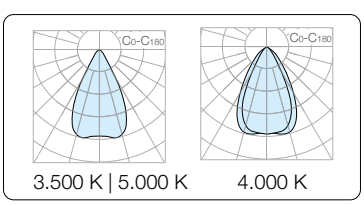


Balanced light distribution for production areas and workshops where uniform and efficient illumination over a medium width is required.

NB: Narrow-beam*

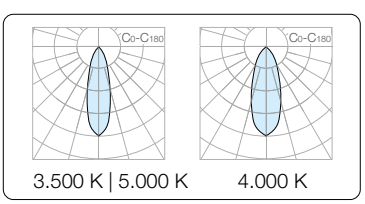

Deep beam light distribution for targeted illumination of high aisles or storage areas with narrow geometries - particularly effective at great heights.

OVAL: Oval light distribution

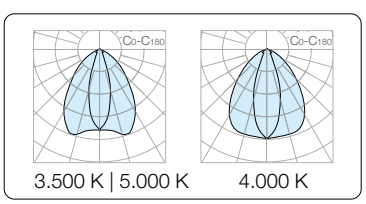

Elongated light distribution for corridors, hallways and busy areas – optimised for linear room geometries with uniform light distribution.

*on request

EASYLIGHT

INDOOR




EASYLIGHT

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK06 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
EASYLIGHT 1500 135 835/840/850 WB WH ML	○	27-75 W	3500 K	5000-13200 lm	188 lm/W
			4000 K	5100-14000 lm	195 lm/W
			5000 K	5100-13600 lm	198 lm/W
EASYLIGHT 1500 135 835/840/850 MB WH ML	○	27-75 W	3500 K	5300-13900 lm	196 lm/W
			4000 K	5300-14000 lm	196 lm/W
			5000 K	5400-13900 lm	200 lm/W
EASYLIGHT 1500 135 835/840/850 OVAL WH ML	○	27-75 W	3500 K	5100-13700 lm	189 lm/W
			4000 K	5300-14000 lm	196 lm/W
			5000 K	5300-13900 lm	196 lm/W
EASYLIGHT 1500 135 835/840/850 WB WH ML DALI2	○	27-75 W	3500 K	5300-13800 lm	186 lm/W
			4000 K	5200-14000 lm	183 lm/W
			5000 K	5400-13800 lm	200 lm/W
EASYLIGHT 1500 135 835/840/850 MB WH ML DALI2	○	27-75 W	3500 K	5300-13900 lm	196 lm/W
			4000 K	5300-14000 lm	196 lm/W
			5000 K	5400-13900 lm	200 lm/W
EASYLIGHT 1500 135 835/840/850 OVAL WH ML DALI2	○	27-75 W	3500 K	5300-13900 lm	196 lm/W
			4000 K	5300-14000 lm	196 lm/W
			5000 K	5300-13900 lm	196 lm/W



	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	<25	80°	×	-20°C – 40°C	2,6 kg	On/Off	✓	**1009207**	**200.00**
100 000 h L80B10	<25	55°	×	-20°C – 40°C	2,6 kg	On/Off	✓	**1009209**	**200.00**
100 000 h L80B10	<25	40°	×	-20°C – 40°C	2,6 kg	On/Off	✓	**1009210**	**200.00**
100 000 h L80B10	<25	80°	×	-20°C – 40°C	2,8 kg	Dali	✓	**1009212**	**250.00**
100 000 h L80B10	<25	55°	×	-20°C – 40°C	2,8 kg	Dali	✓	**1009214**	**250.00**
100 000 h L80B10	<25	40°	×	-20°C – 40°C	2,8 kg	Dali	✓	**1009215**	**250.00**

EASYLIGHT

INDOOR




EASYLIGHT

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK06 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
EASYLIGHT 2500 140 835/840/850 WB WH ML	○	29-80 W	3500 K	5800-15400 lm	200 lm/W
			4000 K	5800-15700 lm	200 lm/W
			5000 K	5900-15400 lm	203 lm/W
EASYLIGHT 2500 140 835/840/850 MB WH ML	○	29-80 W	3500 K	5800-15600 lm	200 lm/W
			4000 K	5800-15800 lm	200 lm/W
			5000 K	5800-15600 lm	200 lm/W
EASYLIGHT 2500 140 835/840/850 OVAL WH ML	○	29-80 W	3500 K	5800-15300 lm	200 lm/W
			4000 K	5800-15500 lm	200 lm/W
			5000 K	5800-15300 lm	200 lm/W
EASYLIGHT 2500 150 835/840/850 WB WH ML DALI2	○	29-80 W	3500 K	5800-15400 lm	200 lm/W
			4000 K	5800-15600 lm	200 lm/W
			5000 K	5800-15300 lm	200 lm/W
EASYLIGHT 2500 150 835/840/850 MB WH ML DALI2	○	29-80 W	3500 K	5800-15600 lm	200 lm/W
			4000 K	5800-15800 lm	200 lm/W
			5000 K	5800-15600 lm	200 lm/W
EASYLIGHT 2500 150 835/840/850 OVAL WH ML DALI2	○	29-80 W	3500 K	5800-15600 lm	200 lm/W
			4000 K	5800-15800 lm	200 lm/W
			5000 K	5800-15600 lm	200 lm/W



	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	<25	80°	×	-20°C – 40°C	3,7 kg	On/Off	✓	**1009217**	**320.00**
100 000 h L80B10	<25	55°	×	-20°C – 40°C	3,7 kg	On/Off	✓	**1009219**	**320.00**
100 000 h L80B10	<25	40°	×	-20°C – 40°C	3,7 kg	On/Off	✓	**1009220**	**320.00**
100 000 h L80B10	<25	80°	×	-20°C – 40°C	3,7 kg	Dali	✓	**1009222**	**370.00**
100 000 h L80B10	<25	55°	×	-20°C – 40°C	3,7 kg	Dali	✓	**1009224**	**370.00**
100 000 h L80B10	<25	40°	×	-20°C – 40°C	3,7 kg	Dali	✓	**1009225**	**370.00**

EASYLIGHT

INDOOR




EASYLIGHT

Mains voltage: 220-240 V ~0/50/60 Hz
Emergency lighting total wattage: 3 W

IP20 IK06 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting luminous flux
EASYLIGHT 1500 135 835/840/850 WB WH ML EM 3H	○	27-75 W	3500 K	5000-13200 lm	192 lm/W	450 lm
			4000 K	5100-14000 lm	196 lm/W	450 lm
			5000 K	5100-13600 lm	196 lm/W	470 lm
EASYLIGHT 1500 135 835/840/850 OVAL WH ML EM 3H	○	27-75 W	3500 K	5100-13700 lm	189 lm/W	450 lm
			4000 K	5300-14000 lm	196 lm/W	450 lm
			5000 K	5300-13900 lm	196 lm/W	470 lm
EASYLIGHT 1500 135 835/840/850 WB ML WH DALI2 EM 3H	○	27-75 W	3500 K	5300-13800 lm	196 lm/W	450 lm
			4000 K	5200-14000 lm	193 lm/W	450 lm
			5000 K	5400-13800 lm	200 lm/W	470 lm
EASYLIGHT 1500 135 835/840/850 OVAL WH ML DALI2 EM 3H	○	27-75 W	3500 K	5300-13900 lm	196 lm/W	450 lm
			4000 K	5300-14000 lm	196 lm/W	450 lm
			5000 K	5300-13900 lm	196 lm/W	470 lm



	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	25	80°	×	-20°C – 40°C	2,9 kg	On/Off	✓	**1011231**	**300.00**
100 000 h L80B10	25	40°	×	-20°C – 40°C	2,9 kg	On/Off	✓	**1011233**	**300.00**
100 000 h L80B10	25	80°	×	-20°C – 40°C	3 kg	Dali	✓	**1011234**	**350.00**
100 000 h L80B10	25	40°	×	-20°C – 40°C	3 kg	Dali	✓	**1011236**	**350.00**

EASYLIGHT

INDOOR




EASYLIGHT

Mains voltage: 220-240 V ~0/50/60 Hz
Emergency lighting total wattage: 3 W

IP20 IK06 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting luminous flux
EASYLIGHT 2500 140 835/840/850 WB WH ML EM 3H	○	29-80 W	3500 K	5800-15400 lm	200 lm/W	450 lm
			4000 K	5800-15700 lm	200 lm/W	450 lm
			5000 K	5900-15400 lm	203 lm/W	470 lm
EASYLIGHT 2500 140 835/840/850 NB WH ML EM 3H	○	29-80 W	3500 K	5800-15300 lm	200 lm/W	450 lm
			4000 K	5800-15500 lm	200 lm/W	450 lm
			5000 K	5800-15300 lm	200 lm/W	470 lm
EASYLIGHT 2500 150 835/840/850 WB WH ML DALI2 EM 3H	○	29-80 W	3500 K	5800-15400 lm	200 lm/W	450 lm
			4000 K	5800-15600 lm	200 lm/W	450 lm
			5000 K	5800-15300 lm	200 lm/W	470 lm
EASYLIGHT 2500 150 835/840/850 OVAL WH ML DALI2 EM 3H	○	29-80 W	3500 K	5800-15600 lm	200 lm/W	450 lm
			4000 K	5800-15800 lm	200 lm/W	450 lm
			5000 K	5800-15600 lm	200 lm/W	470 lm



		UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	100 000 h L80B10	25	80°	✕	-20°C – 40°C	4,1 kg	On/Off	✓	**1011237**	**390.00**
	100 000 h L80B10	25	36°	✕	-20°C – 40°C	4,1 kg	On/Off	✓	**1011239**	**390.00**
	100 000 h L80B10	25	80°	✕	-20°C – 40°C	4,3 kg	Dali	✓	**1011240**	**450.00**
	100 000 h L80B10	25	40°	✕	-20°C – 40°C	4,3 kg	Dali	✓	**1011242**	**450.00**

EASYLIGHT

INDOOR



L x W x H (mm):
300 x 65 x 60



L x W x H (mm):
300 x 65 x 60



L x W x H (mm):
436 x 65 x 60



L x W x H (mm):
436 x 65 x 60

Product description	Colour	Product no.	EUR
EASYLIGHT FIB 300 5 25 WH *FEED IN BOX 300MM, 5 POLE, 2.5MM²*	○	**1009230**	**45.00**
EASYLIGHT FIB 300 7 25 WH *FEED IN BOX 300MM, 7 POLE, 2.5MM²*	○	**1009231**	**45.00**
EASYLIGHT FOB 300 5 25 WH *FEED OUT BOX 300MM, 5 POLE, 2,5MM.*	○	**1009232**	**55.00**
EASYLIGHT FOB 300 7 25 WH *FEED OUT BOX 300MM, 7 POLE, 2.5MM²*	○	**1009233**	**65.00**



L x W x H (mm):
1500 x 65 x 42



L x W x H (mm):
2500 x 65 x 42

W x H (mm):
65 x 60

Product description	Colour	Product no.	EUR
EASYLIGHT BC 1500 5 25 WH *BLIND COVER 1500MM, 5 POLE, 2.5MM²*	○	**1009234**	**50.00**
EASYLIGHT BC 1500 7 25 WH *BLIND COVER 1500MM, 7 POLE, 2.5MM²*	○	**1009235**	**58.00**
EASYLIGHT BC 2500 5 25 WH *BLIND COVER 2500MM, 5 POLE, 2.5MM²*	○	**1009236**	**75.00**
EASYLIGHT BC 2500 7 25 WH *BLIND COVER 2500MM, 7 POLE, 2.5MM²*	○	**1009237**	**85.00**
EASYLIGHT EC WH *END CAP WHITE*	○	**1009240**	**5.00**



Product description	Colour	Product no.	EUR
EASYLIGHT CSK *CHAIN SUSPENSION KITS (WITHOUT CHAIN)*	◐	**1009241**	**8.00**
EASYLIGHT CSK FT *CHAIN SUSPENSION KITS FINE TUNED (WITHOUT CHAIN)*	◐	**1009242**	**11.00**
EASYLIGHT SCK 3000 *STEEL CABLE SUSPENSION KITS 3000MM*	◐	**1009243**	**15.00**
EASYLIGHT SCF M6 *SURFACE CEILING FIX M6*	◐	**1009244**	**7.00**
EASYLIGHT SCF M10 *SURFACE CEILING FIX M10*	◐	**1009245**	**7.00**
EASYLIGHT STM *SURFACE TRACK MOUNTED*	◐	**1009246**	**7.00**
EASYLIGHT SCK 5000 *STEEL CABLE SUSPENSION KITS 5000MM*	◐	**1009247**	**18.00**
EASYLIGHT SCKL 3000 *STEEL CABLE SUSPENSION KITS 3000MM WITH LOOP*	◐	**1011059**	**14.00**
EASYLIGHT SCKL 5000 *STEEL CABLE SUSPENSION KITS 5000MM WITH LOOP*	◐	**1011060**	**19.00**

EASYLIGHT SPOT

INDOOR




EASYLIGHT SPOT

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
EASYLIGHT SPOT 500 428 927 *WB WH ML*	○	12-29,5 W	2700 K	1700-4200 lm	148 lm/W
EASYLIGHT SPOT 500 440 930 *WB WH ML*	○	12-29,5 W	3000 K	1800-4300 lm	154 lm/W
EASYLIGHT SPOT 500 457 935 *WB WH ML*	○	12-29,5 W	3500 K	1800-4400 lm	155 lm/W
EASYLIGHT SPOT 500 472 940 *WB WH ML*	○	12-29,5 W	4000 K	1800-4400 lm	155 lm/W
EASYLIGHT SPOT 500 472 950 *WB WH ML*	○	12-29,5 W	5000 K	1800-4400 lm	155 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	On/Off	✓	**1011530**	**210.00**
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	On/Off	✓	**1011531**	**210.00**
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	On/Off	✓	**1011532**	**210.00**
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	On/Off	✓	**1011533**	**210.00**
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	On/Off	✓	**1011534**	**210.00**



H x Ø (mm):
42 x 75



H x Ø (mm):
42 x 75



H x Ø (mm):
42 x 75

EASYLIGHT SPOT REFLECTORS

Product description	Colour	Product no.	EUR
EASYLIGHT SPOT REFLECTOR *NB*	○	**1011544**	**14.00**
EASYLIGHT SPOT REFLECTOR *MB*	○	**1011545**	**14.00**
EASYLIGHT SPOT REFLECTOR *VWB*	○	**1011546**	**14.00**

EASYLIGHT SPOT

INDOOR




EASYLIGHT SPOT

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
EASYLIGHT SPOT 500 428 927 *WB WH ML DALI2*	○	12-29,5 W	2700 K	1700-4200 lm	148 lm/W
EASYLIGHT SPOT 500 440 930 *WB WH ML DALI2*	○	12-29,5 W	3000 K	1800-4300 lm	154 lm/W
EASYLIGHT SPOT 500 457 935 *WB WH ML DALI2*	○	12-29,5 W	3500 K	1800-4400 lm	155 lm/W
EASYLIGHT SPOT 500 472 950 *WB WH ML DALI2*	○	12-29,5 W	5000 K	1800-4400 lm	155 lm/W
EASYLIGHT SPOT 500 472 940 *WB WH ML DALI2*	○	12-29,5 W	4000 K	1800-4400 lm	155 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	Dali	✓	**1011540**	**260.00**
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	Dali	✓	**1011541**	**260.00**
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	Dali	✓	**1011542**	**260.00**
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	Dali	✓	**1011543**	**260.00**
50 000 h L80B10	19	36°	90°	×	-20°C – 40°C	1,7 kg	Dali	✓	**1011559**	**260.00**



H x Ø (mm):
42 x 75



H x Ø (mm):
42 x 75



H x Ø (mm):
42 x 75

EASYLIGHT SPOT REFLECTORS

Product description	Colour	Product no.	EUR
EASYLIGHT SPOT REFLECTOR *NB*	○	**1011544**	**14.00**
EASYLIGHT SPOT REFLECTOR *MB*	○	**1011545**	**14.00**
EASYLIGHT SPOT REFLECTOR *VWB*	○	**1011546**	**14.00**

EASYLIGHT

INDOOR



EASYLIGHT

Mains voltage: 220-240 V ~0/50/60 Hz
Emergency lighting total wattage: 3 W

IP20 IK04 CRI 70

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
EASYLIGHT 1000 450 750 OVAL/ROUND *EM 3H WH*	○	3 W	5000 K	450 lm	150 lm/W
EASYLIGHT 1000 450 750 OVAL/ROUND *EM 3H WH DALI*	○	3 W	5000 K	450 lm	150 lm/W



INTERMEDIATE MODULE WITH INTEGRATED 3-PHASE TRACK

for added flexibility in the linear lighting system

Product description	Colour	Product no.	EUR
EASYLIGHT 1500 *3PH TRACK WH*	○	**1011547**	**210.00**
EASYLIGHT 2500 *3PH TRACK WH*	○	**1011549**	**310.00**
EASYLIGHT 1500 *3PH TRACK WH DALI*	○	**1011551**	**240.00**
EASYLIGHT 2500 *3PH TRACK WH DALI*	○	**1011553**	**350.00**

				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	50 000 h	140°	×	0° + 45°C	1,7 kg	On/Off	✓	**1011506**	**220.00**
	50 000 h	140°	×	0° + 45°C	1,8 kg	On/Off	✓	**1011508**	**320.00**

RETRO

The quickest way to modernise a linear lighting system.

The RETRO LED gear tray was specially developed for quick and easy retrofitting of existing T8 and T5 continuous-row lighting systems. Thanks to the ingenious Click Design, replacement is possible in less than a minute - no tools or conversions required. The modules are compatible with a wide range of popular trunking systems and offer a significantly higher efficiency of up to 195 lm/W.


Output and light colour can be adjusted on site using the power and CCT switch for maximum project flexibility. Different beam angles, DALI options and a lifespan of up to 100,000 hours make RETRO the ideal solution for demanding modernisation projects in industry, retail and logistics.

RETRO AT A GLANCE


1:1 replacement for existing T8/T5 fluorescent lamps
Compatible with top brand trunking
Up to 195 lm/W luminous efficiency
Tool-free click-fit assembly and length-adjustable end caps
Integrated power and CCT switch
Different beam angles and lengths for maximum flexibility

1:1 SOLUTION


With the RETRO LED module, you can convert your existing trunking system to LED with no tools in just 44 seconds!




Remove old light




Ensure that male and female plugs are positioned correctly




Click the new LED module into existing trunking




Done

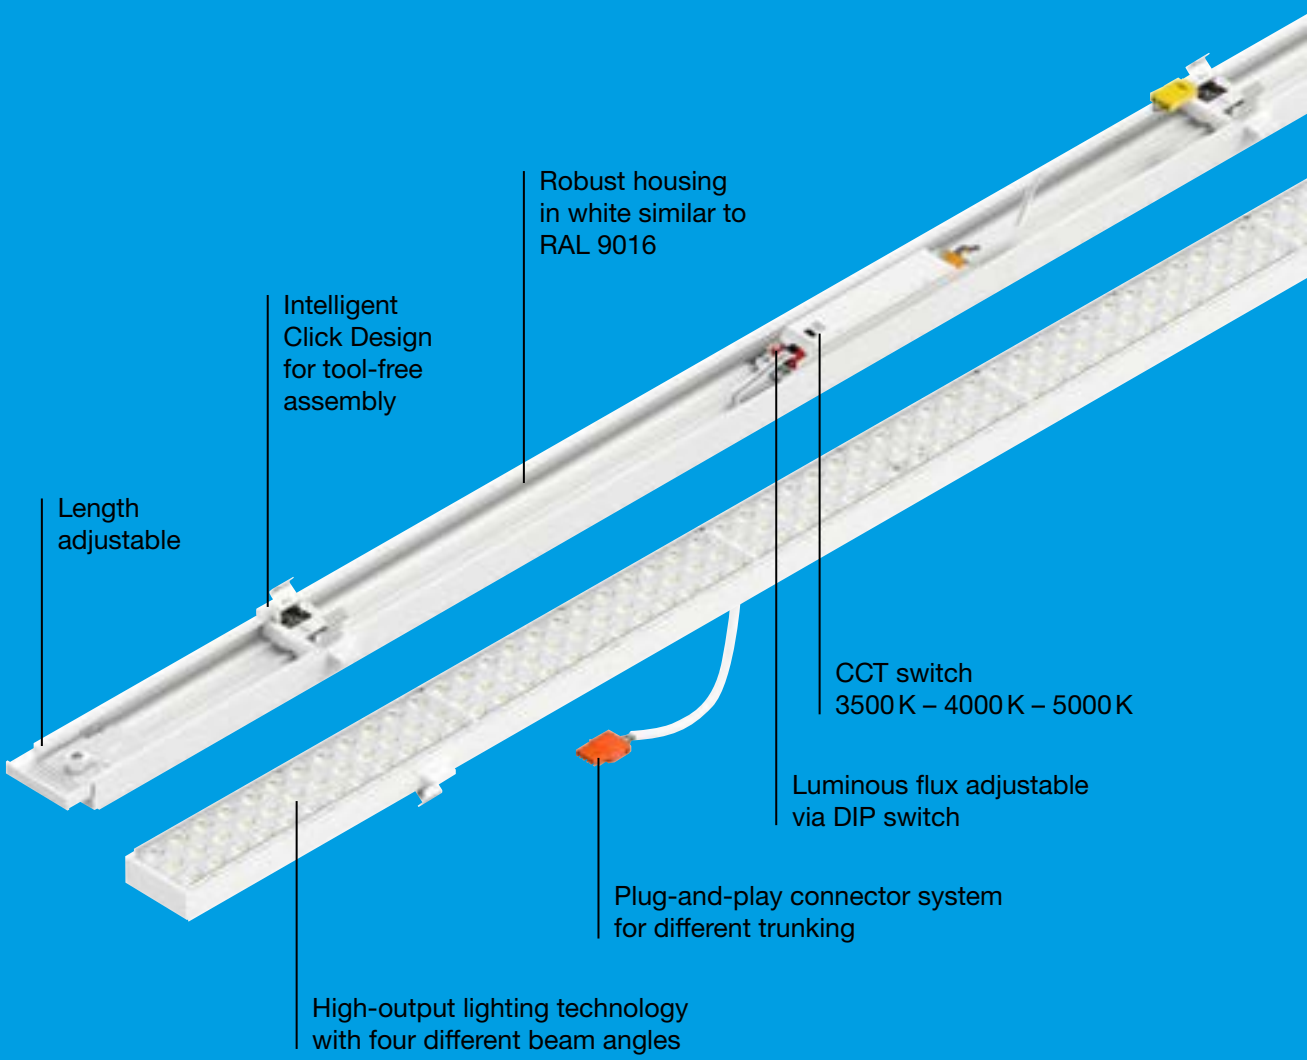


Easy adjustment to the desired length









1,175 mm to 1,237 mm









1,475 mm to 1,537 mm

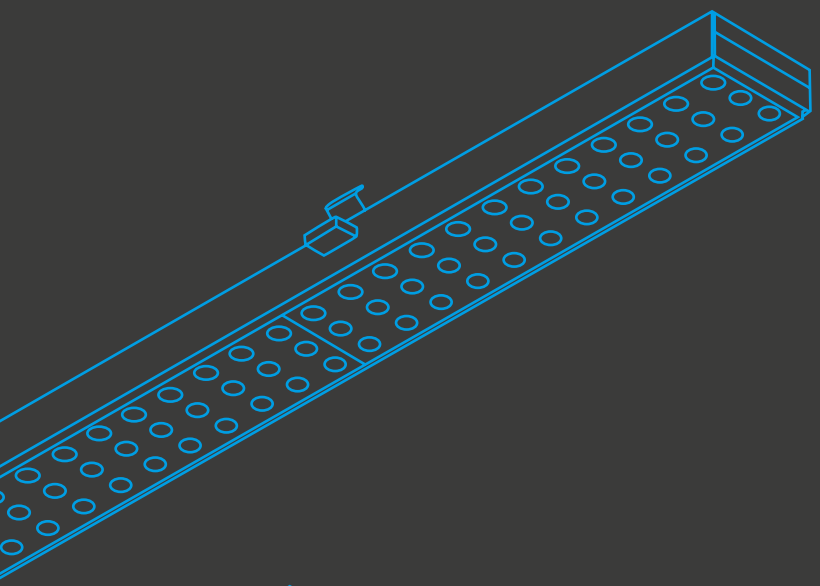



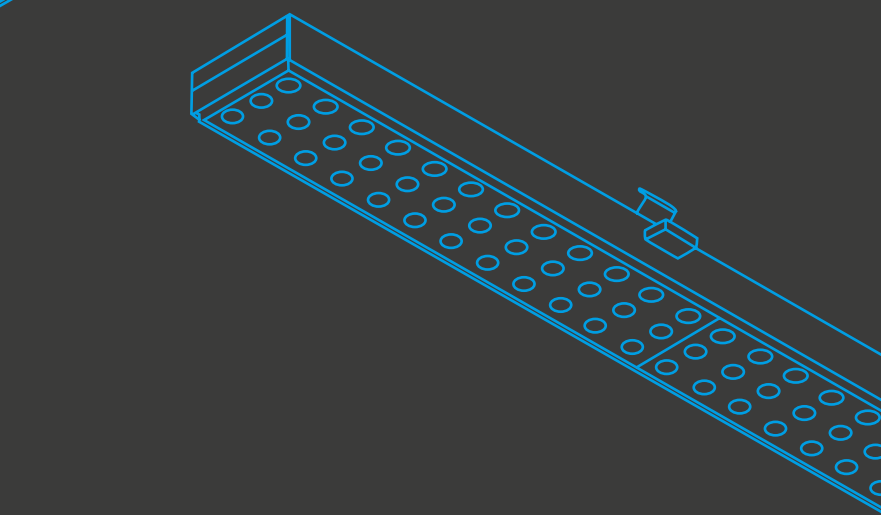



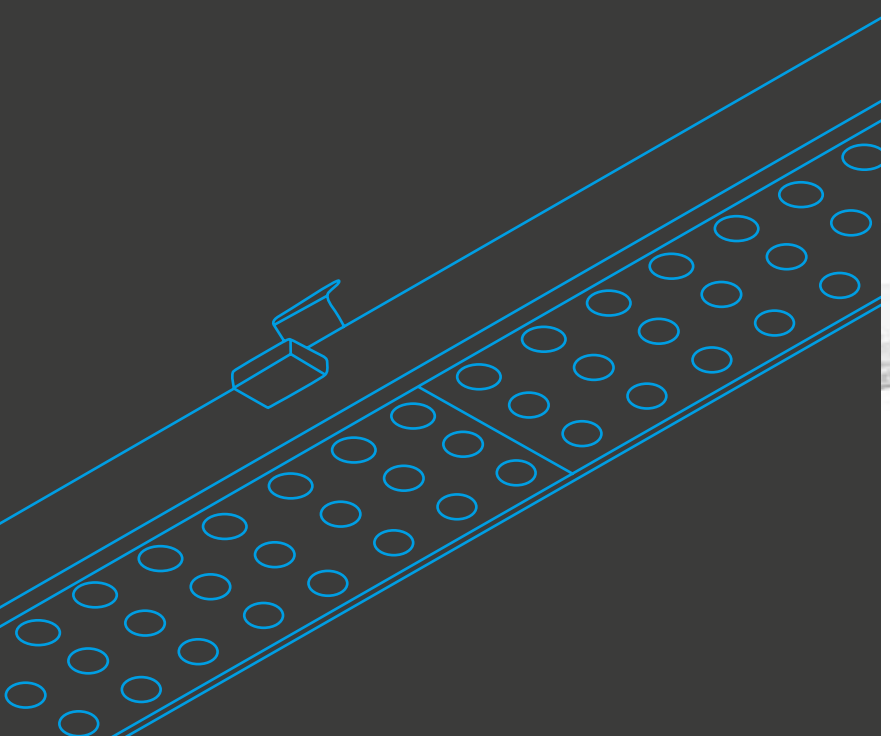



Simply remove the old light carrier and replace it with RETRO.

RETRO

up to
190 lm/W

PRODUCT ADVANTAGES

1:1 replacement of existing T8/T5 continuous-row systems in under 1 minute

Compatible with standard trunking from well-known manufacturers

High energy saving thanks to **efficiency of up to 195 lm/W**

Lifespan of up to **100,000 hours**

EASY TO INSTALL Thanks to Click Design for tool-free installation

Flexibly adjustable thanks to four different beam angles **Multi-Lumen and Multi-Colour**

DALI dimmable


DC-compatible

BEG-eligible

MULTI LUMEN **MULTI COLOR**

BEAM ANGLE


WB: Wide-beam

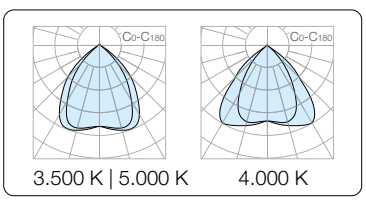

Wide light distribution for open areas such as supermarkets, logistics areas and showrooms. Ideal for uniform ambient lighting.




NB: Narrow-beam*

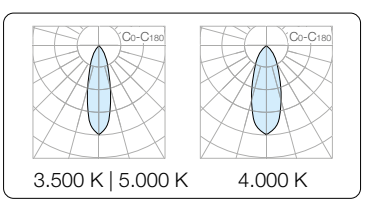


Deep beam light distribution for targeted illumination of high aisles or storage areas with narrow geometries – particularly effective at great heights.

MB: Medium-wide beam

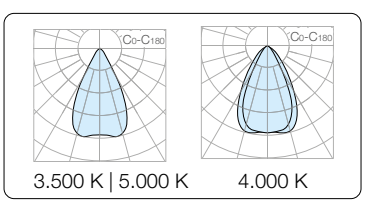

Balanced light distribution for production areas and workshops where uniform and efficient illumination over a medium width is required.

OVAL: Oval light distribution

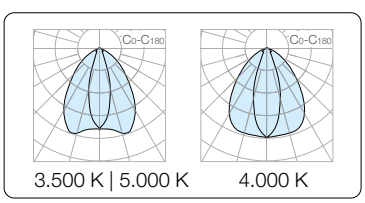

Elongated light distribution for corridors, hallways and busy areas - optimised for linear room geometries with uniform light distribution.

*on request

RETRO

INDOOR





RETRO

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK04 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
RETRO LT 1200 110 835/840/850 WB ML WH	○	21-58 W	3500 K	3800-10600 lm	183 lm/W
			4000 K	3900-11000 lm	190 lm/W
			5000 K	3900-10900 lm	188 lm/W
RETRO LT 1200 110 835/840/850 MB ML WH	○	21-58 W	3500 K	3900-10600 lm	186 lm/W
			4000 K	4000-11000 lm	190 lm/W
			5000 K	4000-10700 lm	190 lm/W
RETRO LT 1200 110 835/840/850 OVAL ML WH	○	21-58 W	3500 K	4000-10600 lm	190 lm/W
			4000 K	4000-11000 lm	190 lm/W
			5000 K	4000-10500 lm	190 lm/W
RETRO LT 1200 107 835/840/850 WB ML WH DALI	○	21-58 W	3500 K	3900-10600 lm	186 lm/W
			4000 K	3900-11000 lm	190 lm/W
			5000 K	3900-10900 lm	188 lm/W
RETRO LT 1200 107 835/840/850 MB ML WH DALI	○	29-55 W	3500 K	3900-10200 lm	186 lm/W
			4000 K	4000-10900 lm	190 lm/W
			5000 K	4000-10700 lm	190 lm/W
RETRO LT 1200 107 835/840/850 OVAL ML WH DALI	○	29-55 W	3500 K	5200-9600 lm	179 lm/W
			4000 K	5400-10200 lm	186 lm/W
			5000 K	5400-10000 lm	186 lm/W

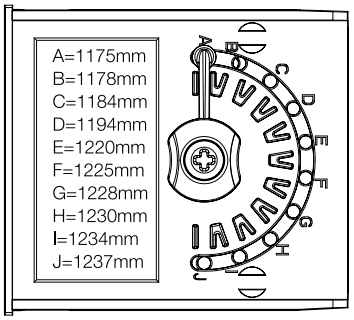

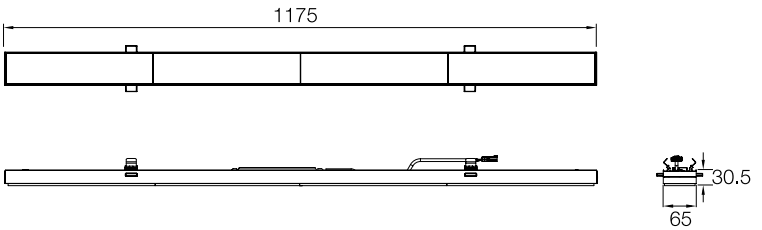

			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	80°	×	-20°C – 40°C	1,3 kg	On/Off	✓	**1009179**	**160.00**
100 000 h L80B10	55°	×	-20°C – 40°C	1,3 kg	On/Off	✓	**1009180**	**160.00**
100 000 h L80B10	40°	×	-20°C – 40°C	1,3 kg	On/Off	✓	**1009182**	**160.00**
100 000 h L80B10	80°	×	-20°C – 40°C	1,4 kg	Dali	✓	**1009183**	**210.00**
100 000 h L80B10	55°	×	-20°C – 40°C	1,4 kg	Dali	✓	**1009184**	**210.00**
100 000 h L80B10	40°	×	-20°C – 40°C	1,4 kg	Dali	✓	**1009186**	**210.00**

RETRO

INDOOR





RETRO

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK04 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
RETRO LT 1500 135 835/840/850 WB ML WH	○	26-75 W	3500 K	4800-13200 lm	185 lm/W
			4000 K	4900-13800 lm	188 lm/W
			5000 K	5000-13600 lm	192 lm/W
RETRO LT 1500 135 835/840/850 MB ML WH	○	26-75 W	3500 K	4900-13400 lm	188 lm/W
			4000 K	5000-14000 lm	192 lm/W
			5000 K	5000-13900 lm	192 lm/W
RETRO LT 1500 135 835/840/850 OVAL ML WH	○	26-75 W	3500 K	5100-13200 lm	196 lm/W
			4000 K	5100-13400 lm	196 lm/W
			5000 K	5100-13200 lm	196 lm/W
RETRO LT 1500 133 835/840/850 WB ML WH DALI	○	26-75 W	3500 K	4800-13200 lm	185 lm/W
			4000 K	4900-13800 lm	188 lm/W
			5000 K	4900-13600 lm	188 lm/W
RETRO LT 1500 133 835/840/850 MB ML WH DALI	○	25-71 W	3500 K	4800-12600 lm	192 lm/W
			4000 K	4800-13300 lm	192 lm/W
			5000 K	5000-13500 lm	200 lm/W
RETRO LT 1500 133 835/840/850 OVAL ML WH DALI	○	25-71 W	3500 K	4700-12500 lm	188 lm/W
			4000 K	4800-13300 lm	192 lm/W
			5000 K	4800-13000 lm	192 lm/W

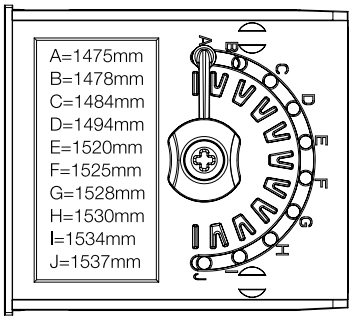

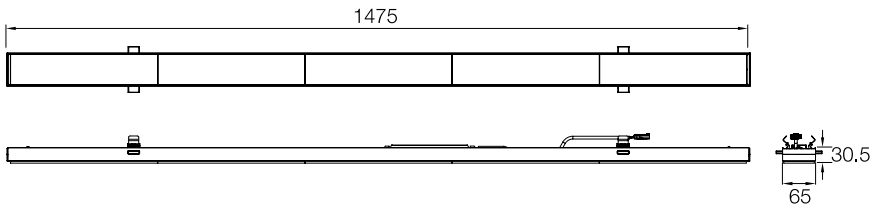

			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	80°	×	-20°C – 40°C	1,6 kg	On/Off	✓	**1009187**	**180.00**
100 000 h L80B10	55°	×	-20°C – 40°C	1,6 kg	On/Off	✓	**1009188**	**180.00**
100 000 h L80B10	40°	×	-20°C – 40°C	1,6 kg	On/Off	✓	**1009190**	**180.00**
100 000 h L80B10	80°	×	-20°C – 40°C	1,7 kg	Dali	✓	**1009191**	**220.00**
100 000 h L80B10	55°	×	-20°C – 40°C	1,7 kg	Dali	✓	**1009192**	**220.00**
100 000 h L80B10	40°	×	-20°C – 40°C	1,7 kg	Dali	✓	**1009194**	**220.00**

RETRO

INDOOR



CONNECTOR FOR ON/OFF

Product description	Colour	Product no.	EUR
RETRO CON 3P001 *CONNECTOR 3-PIN PLUG*	○	**1009195**	**17.00**
RETRO CON 3P002 *CONNECTOR 3-PIN PLUG*	○	**1009196**	**17.00**
RETRO CON 3P003 *CONNECTOR 3-PIN PLUG*	○	**1009197**	**17.00**
RETRO CON 3P004 *CONNECTOR 3-PIN PLUG*	○	**1009198**	**17.00**
RETRO CON 3P005 *CONNECTOR 3-PIN PLUG*	○	**1009199**	**17.00**
RETRO CON 3P006 *CONNECTOR 3-PIN PLUG*	○	**1009200**	**17.00**
RETRO CON 3P007 *CONNECTOR 3-PIN PLUG*	○	**1009201**	**17.00**



CONNECTOR FOR DALI

Product description	Colour	Product no.	EUR
RETRO CON 5P101 *CONNECTOR 5-PIN PLUG*	○	**1009202**	**22.00**
RETRO CON 5P102 *CONNECTOR 5-PIN PLUG*	○	**1009203**	**22.00**
RETRO CON 5P103 *CONNECTOR 5-PIN PLUG*	○	**1009204**	**22.00**
RETRO CON 5P104 *CONNECTOR 5-PIN PLUG*	○	**1009205**	**22.00**
RETRO CON 5P105 *CONNECTOR 5-PIN PLUG*	○	**1009206**	**22.00**

L x W x H (mm):
1475 x 62 x 19



L x W x H (mm):
1528 x 62 x 19

L x W x H (mm):
50 x 59,5 x 39,4

BLANK COVER

Product description	Colour	Product no.	EUR
RETRO TRUNKING PC BLIND COVER *1475*	○	**1010717**	**31.00**
RETRO TRUNKING PC BLIND COVER *1528*	○	**1010718**	**22.00**
RETRO TRUNKING PC BLIND COVER *MOUNTING CLIP*	◐	**1010719**	**6.00**

RETRO

INDOOR




RETRO

Mains voltage: 220-240 V ~0/50/60 Hz
Emergency lighting total wattage: 3 W

IP20 IK04 CRI 80 MULTI COLOR MULTI LUMEN

Product Description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting luminous flux
RETRO LT 1500 135 835/840/850 WB ML EM 3H WH	○	26-75 W	3500 K	4800-13200 lm	185 lm/W	450 lm
			4000 K	4900-13800 lm	188 lm/W	450 lm
			5000 K	5000-13600 lm	192 lm/W	460 lm
RETRO LT 1500 135 835/840/850 OVAL ML EM 3H WH	○	26-75 W	3500 K	5100-13200 lm	196 lm/W	450 lm
			4000 K	5100-13400 lm	196 lm/W	450 lm
			5000 K	5100-13200 lm	196 lm/W	460 lm
RETRO LT 1500 133 835/840/850 WB ML EM 3H WH DALI	○	26-75 W	3500 K	4900-13400 lm	188 lm/W	450 lm
			4000 K	5000-14000 lm	192 lm/W	450 lm
			5000 K	5000-13900 lm	192 lm/W	460 lm
RETRO LT 1500 133 835/840/850 WB ML EM 3H WH DALI	○	26-75 W	3500 K	5100-13200 lm	196 lm/W	450 lm
			4000 K	5100-13400 lm	196 lm/W	450 lm
			5000 K	5100-13200 lm	196 lm/W	460 lm
RETRO LT 1500 135 835/840/850 MB ML EM 3H WH	○	26-75 W	3500 K	4900-13400 lm	188 lm/W	450 lm
			4000 K	5000-14000 lm	192 lm/W	450 lm
			5000 K	5000-13900 lm	192 lm/W	460 lm
RETRO LT 1500 133 835/840/850 MB ML WH DALI	○	26-75 W	3500 K	4900-13400 lm	188 lm/W	450 lm
			4000 K	5000-14000 lm	192 lm/W	450 lm
			5000 K	5000-13900 lm	192 lm/W	460 lm



				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	80°	×		-20°C – 40°C	1,9 kg	On/Off	✓	**1011319**	**290.00**
100 000 h L80B10	40°	×		-20°C – 40°C	1,9 kg	On/Off	✓	**1011321**	**290.00**
100 000 h L80B10	80°	×		-20°C – 40°C	1,9 kg	Dali	✓	**1011322**	**340.00**
100 000 h L80B10	80°	×		-20°C – 40°C	1,9 kg	Dali	✓	**1011324**	**340.00**
100 000 h L80B10	55°	×		-20°C – 40°C	1,9 kg	On/Off	✓	**1011653**	**290.00**
100 000 h L80B10	55°	×		-20°C – 40°C	1,9 kg	Dali	✓	**1011654**	**340.00**

RETRO

INDOOR



CONNECTOR FOR ON/OFF

Product description	Colour	Product no.	EUR
RETRO CON 4P001 *CONNECTOR 4-PLUG EM*	○	**1011656**	**19.00**
RETRO CON 4P002 *CONNECTOR 4-PLUG EM*	○	**1011657**	**19.00**
RETRO CON 4P003 *CONNECTOR 4-PLUG EM*	○	**1011658**	**19.00**
RETRO CON 4P004 *CONNECTOR 4-PLUG EM*	○	**1011659**	**19.00**
RETRO CON 4P005 *CONNECTOR 4-PLUG EM*	○	**1011660**	**19.00**
RETRO CON 4P006 *CONNECTOR 4-PLUG EM*	○	**1011661**	**19.00**



CONNECTOR FOR DALI

Product description	Colour	Product no.	EUR
RETRO CON 6P101 *CONNECTOR 6-PLUG EM*	○	**1011663**	**24.00**
RETRO CON 6P102 *CONNECTOR 6-PLUG EM*	○	**1011664**	**24.00**
RETRO CON 6P103 *CONNECTOR 6-PLUG EM*	○	**1011665**	**24.00**
RETRO CON 6P104 *CONNECTOR 6-PLUG EM*	○	**1011666**	**24.00**

PANEL

INDOOR


PANEL V


Mains voltage: 220-240 V ~50/60 Hz

IP40/IP54 IK03 CRI 80 MULTI COLOR

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
PANEL V 600 830/840 34W	○	34 W	3000 K	4100 lm	120 lm/W
			4000 K	4300 lm	126 lm/W
PANEL V 625 830/840 34W	○	34 W	3000 K	4100 lm	120 lm/W
			4000 K	4300 lm	126 lm/W
PANEL V 600 830/840 34W UGR	○	34 W	3000 K	4000 lm	117 lm/W
			4000 K	4200 lm	123 lm/W
PANEL V 625 830/840 34W UGR	○	34 W	3000 K	4000 lm	117 lm/W
			4000 K	4200 lm	123 lm/W
PANEL V DALI 600 830/840 34W UGR	○	34 W	3000 K	4000 lm	117 lm/W
			4000 K	4200 lm	123 lm/W
PANEL V DALI 625 PANEL V 625 830/840 34W	○	34 W	3000 K	4000 lm	117 lm/W
			4000 K	4200 lm	123 lm/W

The matching mounting frames and accessories can be found on page 52 – 53





					Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	50 000 h L80B10	22	115°	✓	-20°C – 40°C	1,5 kg	On/Off	✗	**1007496**	**65.00**
	50 000 h L80B10	22	115°	✓	-20°C – 40°C	1,7 kg	On/Off	✗	**1007497**	**65.00**
	50 000 h L80B10	19	85°	✓	-20°C – 40°C	1,7 kg	On/Off	✗	**1007498**	**75.00**
	50 000 h L80B10	19	85°	✓	-20°C – 40°C	1,9 kg	On/Off	✗	**1007499**	**75.00**
	50 000 h L80B10	19	85°	✓	-20°C – 40°C	1,8 kg	Dali / Touch	✓	**1007504**	**110.00**
	50 000 h L80B10	19	85°	✓	-20°C – 40°C	1,8 kg	Dali / Touch	✓	**1007505**	**110.00**

PANEL

INDOOR




PANEL C


Mains voltage: 220-240 V ~50/60 Hz


IP20/IP54 IK02 CRI 80 MULTI COLOR

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
PANEL C 600 *34 W 830/840 UGR*	○	34 W	3000 K	4550 lm	133 lm/W
			4000 K	4650 lm	136 lm/W
PANEL C 625 *34 W 830/840 UGR*	○	34 W	3000 K	4550 lm	133 lm/W
			4000 K	4650 lm	136 lm/W
PANEL C 600 *34 W 930/940 UGR*	○	34 W	3000 K	4300 lm	126 lm/W
			4000 K	4500 lm	132 lm/W
PANEL C 625 *34 W 930/940 UGR*	○	34 W	3000 K	4300 lm	126 lm/W
			4000 K	4500 lm	132 lm/W
PANEL C DALI 600 *34 W 830/840 UGR*	○	34 W	3000 K	4550 lm	133 lm/W
			4000 K	4650 lm	136 lm/W
PANEL C DALI 625 *34 W 830/840 UGR*	○	34 W	3000 K	4550 lm	133 lm/W
			4000 K	4650 lm	136 lm/W
PANEL C DALI 600 *34 W 930/940 UGR*	○	34 W	3000 K	4300 lm	126 lm/W
			4000 K	4500 lm	132 lm/W
PANEL C DALI 625 *34 W 930/940 UGR*	○	34 W	3000 K	4300 lm	126 lm/W
			4000 K	4500 lm	132 lm/W
PANEL C 1200 *34 W 830/840 UGR*	○	34 W	3000 K	4550 lm	133 lm/W
			4000 K	4650 lm	136 lm/W
PANEL C 1200 *34 W 930/940 UGR*	○	34 W	3000 K	4200 lm	123 lm/W
			4000 K	4400 lm	129 lm/W
PANEL C DALI 1200 *34 W 830/840 UGR*	○	34 W	3000 K	4550 lm	132 lm/W
			4000 K	4650 lm	136 lm/W
PANEL C DALI 1200 *34 W 930/940 UGR*	○	34 W	3000 K	4200 lm	123 lm/W
			4000 K	4400 lm	129 lm/W

The matching mounting frames and accessories can be found on page 52–53







	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
70 000 h L80B10	19	90°	✕	-20°C – 45°C	1,9 kg	On/Off	✕	**1008597**	**114.00**
70 000 h L80B10	19	90°	✕	-20°C – 45°C	2,1 kg	On/Off	✕	**1008598**	**114.00**
70 000 h L80B10	19	90°	✓	-20°C – 45°C	1,6 kg	On/Off	✕	**1008599**	**114.00**
70 000 h L80B10	19	90°	✓	-20°C – 45°C	1,9 kg	On/Off	✕	**1008600**	**114.00**
70 000 h L80B10	19	90°	✕	-20°C – 45°C	2 kg	Dali / Touch	✕	**1008601**	**139.00**
70 000 h L80B10	19	90°	✕	-20°C – 45°C	1,9 kg	Dali / Touch	✕	**1008602**	**139.00**
70 000 h L80B10	19	90°	✓	-20°C – 45°C	1,7 kg	Dali / Touch	✕	**1008603**	**139.00**
70 000 h L80B10	19	90°	✓	-20°C – 45°C	2 kg	Dali / Touch	✕	**1008604**	**139.00**
70 000 h L80B10	19	90°	✕	-20°C – 45°C	2 kg	On/Off	✕	**1008605**	**114.00**
70 000 h L80B10	19	90°	✓	-20°C – 45°C	1,8 kg	On/Off	✕	**1008606**	**114.00**
70 000 h L80B10	19	90°	✕	-20°C – 45°C	2,1 kg	Dali / Touch	✕	**1008607**	**139.00**
70 000 h L80B10	19	90°	✓	-20°C – 45°C	1,9 kg	Dali / Touch	✕	**1008608**	**139.00**

PANEL

INDOOR




PANEL P

Mains voltage: 220-240 V ~0/50/60 Hz

IP44 IK02 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
PANEL P 625 45 840 WB UGR19 *ML WH*	○	21-42 W	4000 K	4140-7860 lm	197 lm/W
PANEL P 625 45 830 WB UGR19 *ML WH*	○	21-42 W	3000 K	3930-7470 lm	187 lm/W
PANEL P 625 45 840 WB UGR19 *ML DALI WH*	○	26-41 W	4000 K	4750-7340 lm	182 lm/W
PANEL P 625 45 830 WB UGR19 *ML DALI WH*	○	26-41 W	3000 K	4510-6980 lm	173 lm/W
PANEL P 600 45 840 WB UGR19 *ML WH*	○	21-42 W	4000 K	4140-7860 lm	197 lm/W
PANEL P 600 45 830 WB UGR19 *ML WH*	○	21-42 W	3000 K	3930-7470 lm	187 lm/W
PANEL P 600 45 840 WB UGR19 *ML DALI WH*	○	26-41 W	4000 K	4750-7340 lm	182 lm/W
PANEL P 600 45 830 WB UGR19 *ML DALI WH*	○	26-41 W	3000 K	4510-6980 lm	173 lm/W

The matching mounting frames and accessories can be found on page 52 – 53

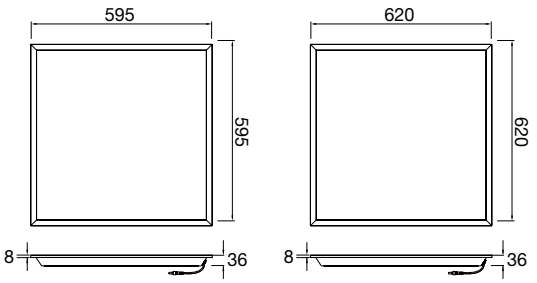

	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	<19	90°	×	-20°C – 40°C	2 kg	On/Off	✓	**1010109**	**130.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	2 kg	On/Off	✓	**1010110**	**130.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	2 kg	Dali	✓	**1010111**	**150.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	2 kg	Dali	✓	**1010112**	**150.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	1,9 kg	On/Off	✓	**1010747**	**130.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	1,9 kg	On/Off	✓	**1010748**	**130.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	1,9 kg	Dali	✓	**1010749**	**150.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	1,9 kg	Dali	✓	**1010750**	**150.00**

PANEL

INDOOR




PANEL P

Mains voltage: 220-240 V ~0/50/60 Hz

IP44 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
PANEL P 1200/300 45 840 WB UGR19 *ML WH*	○	21-42 W	4000 K	4050-7680 lm	193 lm/W
PANEL P 1200/300 45 830 WB UGR19 *ML WH*	○	21-42 W	3000 K	3840-7300 lm	183 lm/W
PANEL P 1200/300 45 840 WB UGR19 *ML DALI WH*	○	26-41 W	4000 K	4670-7210 lm	179 lm/W
PANEL P 1200/300 45 830 WB UGR19 *ML DALI WH*	○	26-41 W	3000 K	4440-6850 lm	170 lm/W
PANEL P 1200/600 60 840 WB UGR19 *ML WH*	○	21-41 W	4000 K	4200-7950 lm	200 lm/W
PANEL P 1200/600 60 830 WB UGR19 *ML WH*	○	21-41 W	3000 K	3990-7560 lm	190 lm/W
PANEL P 1200/600 60 840 WB UGR19 *ML DALI WH*	○	26-41 W	4000 K	4870-7620 lm	187 lm/W
PANEL P 1200/600 60 830 WB UGR19 *ML DALI WH*	○	26-41 W	3000 K	4630-7240 lm	178 lm/W

The matching mounting frames and accessories can be found on page 52 – 53

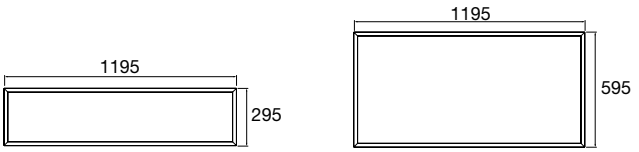

					Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	<19	90°	×		-20°C – 40°C	1,9 kg	On/Off	✓	**1010113**	**140.00**
100 000 h L80B10	<19	90°	×		-20°C – 40°C	1,9 kg	On/Off	✓	**1010114**	**140.00**
100 000 h L80B10	<19	90°	×		-20°C – 40°C	1,9 kg	Dali	✓	**1010115**	**160.00**
100 000 h L80B10	<19	90°	×		-20°C – 40°C	1,9 kg	Dali	✓	**1010116**	**160.00**
100 000 h L80B10	<19	90°	×		-20°C – 40°C	3,6 kg	On/Off	✓	**1010117**	**170.00**
100 000 h L80B10	<19	90°	×		-20°C – 40°C	3,6 kg	On/Off	✓	**1010118**	**170.00**
100 000 h L80B10	<19	90°	×		-20°C – 40°C	3,6 kg	Dali	✓	**1010119**	**200.00**
100 000 h L80B10	<19	90°	×		-20°C – 40°C	3,6 kg	Dali	✓	**1010120**	**200.00**

PAVANNO

INDOOR




PAVANNO

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
PAVANNO 625 45 830/840/850 WB WH *UGR19*	○	17-40 W	3000 K	2950-6680 lm	174 lm/W
			4000 K	3040-7060 lm	180 lm/W
			5000 K	3040-6880 lm	179 lm/W
PAVANNO 625 45 830/840/850 WB WH *UGR19 DALI*	○	22-40 W	3000 K	3580-6380 lm	163 lm/W
			4000 K	3710-6740 lm	170 lm/W
			5000 K	3680-6560 lm	168 lm/W
PAVANNO 625 45 830/840/850 BK WH *UGR19*	●	17-40 W	3000 K	2800-6350 lm	165 lm/W
			4000 K	2880-6710 lm	171 lm/W
			5000 K	2890-6530 lm	170 lm/W
PAVANNO 625 45 830/840/850 BK WH *UGR19 DALI*	●	22-40 W	3000 K	3400-6060 lm	155 lm/W
			4000 K	3520-6410 lm	161 lm/W
			5000 K	3500-6230 lm	159 lm/W
PAVANNO 600 45 830/840/850 WB WH *UGR19*	○	17-40 W	3000 K	2950-6680 lm	174 lm/W
			4000 K	3040-7060 lm	180 lm/W
			5000 K	3040-6880 lm	179 lm/W
PAVANNO 600 45 830/840/850 WB WH *UGR19 DALI*	○	22-40 W	3000 K	3580-6380 lm	163 lm/W
			4000 K	3710-6740 lm	170 lm/W
			5000 K	3680-6560 lm	168 lm/W
PAVANNO 600 45 830/840/850 WB BK *UGR19 DALI*	●	22-40 W	3000 K	3400-6060 lm	155 lm/W
			4000 K	3520-6410 lm	161 lm/W
			5000 K	3500-6230 lm	159 lm/W
PAVANNO 600 45 830/840/850 WB BK *UGR19*	●	17-40 W	3000 K	2800-6350 lm	165 lm/W
			4000 K	2880-6710 lm	171 lm/W
			5000 K	2890-6530 lm	170 lm/W

The matching mounting frames and accessories can be found on page 52–53

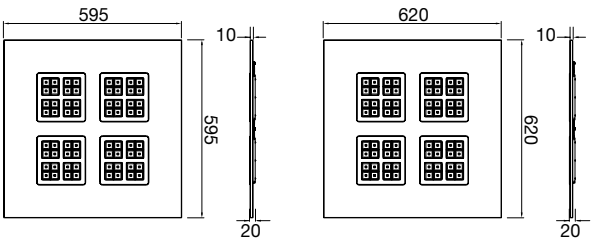

	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	19	80°	✕	-20°C – 40°C	3,2 kg	On/Off	✓	**1010121**	**185.00**
100 000 h L80B10	19	80°	✕	-20°C – 40°C	3,2 kg	Dali	✓	**1010122**	**200.00**
100 000 h L80B10	19	80°	✕	-20°C – 40°C	3,2 kg	On/Off	✓	**1010578**	**185.00**
100 000 h L80B10	19	80°	✕	-20°C – 40°C	3,2 kg	Dali	✓	**1010579**	**200.00**
100 000 h L80B10	19	80°	✕	-20°C – 40°C	3 kg	On/Off	✓	**1010713**	**195.00**
100 000 h L80B10	19	80°	✕	-20°C – 40°C	3 kg	Dali	✓	**1010714**	**200.00**
100 000 h L80B10	19	80°	✕	-20°C – 40°C	3 kg	Dali	✓	**1010715**	**200.00**
100 000 h L80B10	19	80°	✕	-20°C – 40°C	3 kg	On/Off	✓	**1010716**	**195.00**

PAVANNO

INDOOR






PAVANNO

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
PAVANNO 1200/300 45 830/840/850 WB WH *UGR19*	○	17-40 W	3000 K	2950-6680 lm	174 lm/W
			4000 K	3040-7060 lm	180 lm/W
			5000 K	3040-6880 lm	179 lm/W
PAVANNO 1200/300 45 830/840/850 WB WH *UGR19 DALI*	○	22-40 W	3000 K	3580-6380 lm	163 lm/W
			4000 K	3710-6740 lm	170 lm/W
			5000 K	3680-6560 lm	168 lm/W
PAVANNO 1200/300 45 830/840/850 BK WH *UGR19*	●	17-40 W	3000 K	2800-6350 lm	165 lm/W
			4000 K	2880-6710 lm	171 lm/W
			5000 K	2890-6530 lm	170 lm/W
PAVANNO 1200/300 45 830/840/850 BK WH *UGR19 DALI*	●	22-40 W	3000 K	3400-6060 lm	155 lm/W
			4000 K	3520-6410 lm	161 lm/W
			5000 K	3500-6230 lm	159 lm/W

The matching mounting frames and accessories can be found on page 52 – 53



	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	19	80°	×	-20°C – 40°C	3,2 kg	On/Off	✓	**1010123**	**235.00**
100 000 h L80B10	19	80°	×	-20°C – 40°C	3,2 kg	Dali	✓	**1010124**	**250.00**
100 000 h L80B10	19	80°	×	-20°C – 40°C	3,2 kg	On/Off	✓	**1010580**	**235.00**
100 000 h L80B10	19	80°	×	-20°C – 40°C	3,2 kg	Dali	✓	**1010581**	**250.00**

ACCESSORIES

INDOOR



L x W x H (mm):
600 x 600 x 63

L x W x H (mm):
600 x 600 x 71

L x W x H (mm):
625 x 625 x 63



L x W x H (mm):
625 x 625 x 71

PANEL V SURFACE MOUNTING FRAME

Product description	Colour	Product no.	EUR
PANEL 600 *SURFACE MOUNTING FRAME*	○	**1007474**	**45.00**
PANEL 625 *SURFACE MOUNTING FRAME*	○	**1007475**	**45.00**
PANEL 600 *RECESSED MOUNTING FRAME*	○	**1007575**	**65.00**
PANEL 625 *RECESSED MOUNTING FRAME*	○	**1007576**	**65.00**



L x W x H (mm):
599 x 599 x 70



L x W x H (mm):
1200 x 300 x 70




L x W x H (mm):
599 x 599 x 70



L x W x H (mm):
1200 x 300 x 70

PANEL C / PANEL P / PAVANNO SURFACE-MOUNTED FRAME


Product description	Colour	Product no.	EUR
SURFACE MOUNTING FRAME 600 *WH*	○	**1011266**	**40.00**
SURFACE MOUNTING FRAME 625 *WH*	○	**1011267**	**40.00**
SURFACE MOUNTING FRAME 1200/300 *WH*	○	**1011268**	**45.00**
SURFACE MOUNTING FRAME 1200/600 *WH*	○	**1011269**	**55.00**
SURFACE MOUNTING FRAME 600 *BK*	●	**1011270**	**40.00**
SURFACE MOUNTING FRAME 625 *BK*	●	**1011271**	**40.00**
SURFACE MOUNTING FRAME 1200/300 *BK*	●	**1011272**	**45.00**
SURFACE MOUNTING FRAME 1200/600 *BK*	●	**1011273**	**55.00**



L x W x H (mm):
638 x 638 x 76



L x W x H (mm):
1239 x 339 x 76



L x W x H (mm):
638 x 638 x 76



L x W x H (mm):
1239 x 339 x 76

PANEL C / PANEL P / PAVANNO RECESSED MOUNTING FRAME

Product description	Colour	Product no.	EUR
RECESSED MOUNTING FRAME 600 *WH*	○	**1011334**	**45.00**
RECESSED MOUNTING FRAME 625 *WH*	○	**1011335**	**50.00**
RECESSED MOUNTING FRAME 1200/300 *WH*	○	**1011336**	**65.00**
RECESSED MOUNTING FRAME 1200/600 *WH*	○	**1011337**	**75.00**
RECESSED MOUNTING FRAME 600 *BK*	●	**1011338**	**45.00**
RECESSED MOUNTING FRAME 625 *BK*	●	**1011339**	**50.00**
RECESSED MOUNTING FRAME 1200/300 *BK*	●	**1011340**	**65.00**
RECESSED MOUNTING FRAME 1200/600 *BK*	●	**1011341**	**75.00**



Ø x L (mm):
1,5 x 1500



Ø x L (mm):
1,5 x 1500



L (mm):
1000



L x W x H (cm):
4 x 3,5 x 3,2



L x W x H (cm):
39 x 29 x 44

SAFETY CABLE AND MOUNTING SPRINGS

Product description	Colour	Product no.	EUR
PANEL V *SAFETY ROPE 1500*	◐	**1007577**	**15.00**
PANEL C *SUSPENSION ROPE 1500*	○	**1008609**	**19.90**
PANEL P SUSPENSION CABLE *1M*	◐	**1011086**	**11.00**
PANEL C *MOUNTING SPRINGS*	○	**1008610**	**14.90**
MOUNTING CLIPS 4 PCS *FOR PANEL P/PAVANNO*	◐	**1011084**	**7.00**

DOWNLIGHT

INDOOR





DOWNLIGHT V


Mains voltage: 220-240 V ~50/60 Hz

IP20/54 IK02 CRI 80 MULTI COLOR

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
DOWNLIGHT V 100 *6W 830/840 IP54*	●	6W	3000 K	610 lm	101 lm/W
			4000 K	640 lm	106 lm/W
DOWNLIGHT V 150 *9/15W 830/840 IP54*	●	15W	3000 K	1750 lm	122 lm/W
			4000 K	1900 lm	133 lm/W
DOWNLIGHT V 200 *15/21W 830/840 IP54*	●	21W	3000 K	2360 lm	117 lm/W
			4000 K	2490 lm	130 lm/W







			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B50	105°	✓	-20°C – 40°C	0,2 kg	On/Off	×	**1007508**	**45.00**
50 000 h L70B50	105°	✓	-20°C – 40°C	0,3 kg	On/Off	×	**1007509**	**53.00**
50 000 h L70B50	105°	✓	-20°C – 40°C	0,4 kg	On/Off	×	**1007510**	**60.00**






Product description	Colour	Product no.	EUR
DOWNLIGHT V 100 *FLAT COVER*	○	**1007476**	**5.00**
DOWNLIGHT V 100 *FLAT COVER*	●	**1007477**	**5.00**
DOWNLIGHT V 100 *SLIGHT RECESSED COVER*	○	**1007478**	**5.00**
DOWNLIGHT V 100 *SLIGHT RECESSED COVER*	●	**1007479**	**5.00**
DOWNLIGHT V 150 *FLAT COVER*	○	**1007480**	**7.00**
DOWNLIGHT V 150 *FLAT COVER*	●	**1007481**	**7.00**
DOWNLIGHT V 150 *SLIGHT RECESSED COVER*	○	**1007482**	**7.00**
DOWNLIGHT V 150 *SLIGHT RECESSED COVER*	●	**1007483**	**7.00**
DOWNLIGHT V 200 *FLAT COVER*	○	**1007484**	**10.00**
DOWNLIGHT V 200 *FLAT COVER*	●	**1007485**	**10.00**
DOWNLIGHT V 200 *SLIGHT RECESSED COVER*	○	**1007486**	**10.00**
DOWNLIGHT V 200 *SLIGHT RECESSED COVER*	●	**1007487**	**10.00**

DOWNLIGHT

INDOOR





DOWNLIGHT C

Mains voltage: 220-240 V ~50/60 Hz

IP54 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
DOWNLIGHT C 150 *8/14/20W 930 IP54*	○	8/14/20 W	3000 K	950-2250 lm	118 lm/W
DOWNLIGHT C 150 *8/14/20W 940 IP54*	○	8/14/20 W	4000 K	1000-2400 lm	125 lm/W
DOWNLIGHT C 200 *8/16/24W 930 IP54*	○	8/16/24 W	3000 K	1000-2850 lm	125 lm/W
DOWNLIGHT C 200 *8/16/24W 940 IP54*	○	8/16/24 W	4000 K	1080-3100 lm	135 lm/W
DOWNLIGHT C 150 DALI *20W 930 IP54*	○	20 W	3000 K	2250 lm	112 lm/W
DOWNLIGHT C 150 DALI *20W 940 IP54*	○	20 W	4000 K	2400 lm	120 lm/W
DOWNLIGHT C 200 DALI *24W 930 IP54*	○	24 W	3000 K	2850 lm	118 lm/W
DOWNLIGHT C 200 DALI *24W 940 IP54*	○	24 W	4000 K	3100 lm	129 lm/W





			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
70 000 h L80B10	55°	✓	-20°C – 40°C	0,6 kg	On/Off	✕	**1008621**	**89.00**
70 000 h L80B10	55°	✓	-20°C – 40°C	0,6 kg	On/Off	✕	**1008622**	**89.00**
70 000 h L80B10	55°	✓	-20°C – 40°C	0,8 kg	On/Off	✕	**1008623**	**109.00**
70 000 h L80B10	55°	✓	-20°C – 40°C	0,8 kg	On/Off	✕	**1008624**	**109.00**
70 000 h L80B10	55°	✓	-20°C – 40°C	0,6 kg	Dali	✕	**1008625**	**129.00**
70 000 h L80B10	55°	✓	-20°C – 40°C	0,6 kg	Dali	✕	**1008626**	**129.00**
70 000 h L80B10	55°	✓	-20°C – 40°C	0,8 kg	Dali	✕	**1008627**	**149.00**
70 000 h L80B10	55°	✓	-20°C – 40°C	0,8 kg	Dali	✕	**1008628**	**149.00**

DOWNLIGHT

INDOOR




DOWNLIGHT P

Mains voltage: 220-240 V ~50/60 Hz

IP20/ IP54 IK08 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
DOWNLIGHT P *84 12 WM 840 60 ML WH IP54*	○	5-8 W	4000 K	550-1090 lm	131 lm/W
DOWNLIGHT P *84 12 WM 840 60 ML DALI WH IP54*	○	5-8 W	4000 K	540-1060 lm	126 lm/W
DOWNLIGHT P *115 18 WM 840 60 ML WH IP54*	○	11-23 W	4000 K	1970-2880 lm	178 lm/W
DOWNLIGHT P *115 18 WM 840 60 ML DALI WH IP54*	○	5-28 W	4000 K	660-2900 lm	161 lm/W
DOWNLIGHT P *165 30 WM 840 60 ML DALI WH IP54*	○	5-28 W	4000 K	680-4300 lm	171 lm/W
DOWNLIGHT P *165 30 WM 840 60 ML WH IP54*	○	11-23 W	4000 K	2080-4200 lm	187 lm/W
DOWNLIGHT P *230 40 WM 840 60 ML DALI WH IP54*	○	5-28 W	4000 K	720-4660 lm	174 lm/W
DOWNLIGHT P *230 40 WM 840 60 ML WH IP54*	○	12-25 W	4000 K	2220-4910 lm	194 lm/W

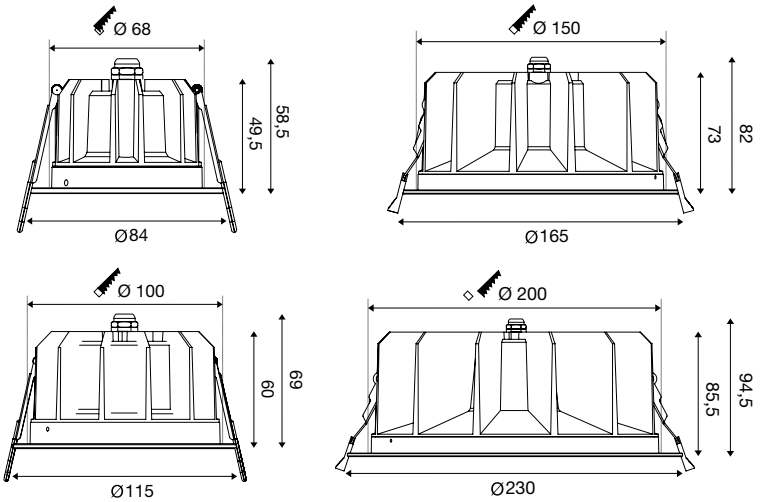

			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L80B20	60°	×	-20°C – 40°C	0,4 kg	On/Off	✓	**1010757**	**80.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,4 kg	Dali	✓	**1010758**	**120.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,5 kg	On/Off	✓	**1010761**	**120.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,5 kg	Dali	✓	**1010762**	**150.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,8 kg	Dali	✓	**1010765**	**180.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010766**	**150.00**
50 000 h L80B20	60°	×	-20°C – 40°C	1,1 kg	Dali	✓	**1010768**	**230.00**
50 000 h L80B20	60°	×	-20°C – 40°C	1,1 kg	On/Off	✓	**1010770**	**200.00**

DOWNLIGHT

INDOOR




DOWNLIGHT P

Mains voltage: 220-240 V ~50/60 Hz

IP20/IP54 IK08 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
DOWNLIGHT P *84 12 WM 830 60 ML WH IP54*	○	6/8 W	3000 K	530-1050 lm	126 lm/W
DOWNLIGHT P *84 12 WM 830 60 ML DALI WH IP54*	○	6/8 W	3000 K	540-1040 lm	124 lm/W
DOWNLIGHT P *115 18 WM 830 60 ML WH IP54*	○	11-17 W	3000 K	1890-2750 lm	170 lm/W
DOWNLIGHT P *115 18 WM 830 60 ML DALI WH IP54*	○	11-17 W	3000 K	640-2790 lm	155 lm/W
DOWNLIGHT P *165 30 WM 830 60 ML DALI WH IP54*	○	19-23 W	3000 K	650-4110 lm	162 lm/W
DOWNLIGHT P *165 30 WM 830 60 ML WH IP54*	○	19-23 W	3000 K	1950-3960 lm	177 lm/W
DOWNLIGHT P *230 40 WM 830 60 ML DALI WH IP54*	○	20-25 W	3000 K	710-4570 lm	171 lm/W
DOWNLIGHT P *230 40 WM 830 60 ML WH IP54*	○	20-25 W	3000 K	2140-4710 lm	187 lm/W

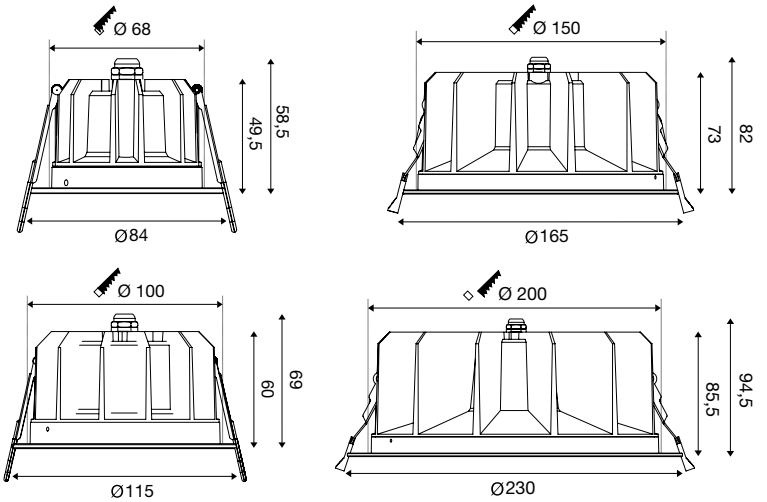

			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L80B20	60°	×	-20°C – 40°C	0,4 kg	On/Off	✓	**1011291**	**80.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,4 kg	Dali	✓	**1011292**	**120.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,5 kg	On/Off	✓	**1011295**	**120.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,5 kg	Dali	✓	**1011296**	**150.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,8 kg	Dali	✓	**1011299**	**180.00**
50 000 h L80B20	60°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1011300**	**150.00**
50 000 h L80B20	60°	×	-20°C – 40°C	1,1 kg	Dali	✓	**1011302**	**230.00**
50 000 h L80B20	60°	×	-20°C – 40°C	1,1 kg	On/Off	✓	**1011304**	**200.00**

UNIVERSAL DOWNLIGHT

INDOOR




UNIVERSAL DOWNLIGHT

Mains voltage: 220-240 V ~50/60 Hz

IP65 IP20 IK02 CRI 90 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
UNIVERSAL DOWNLIGHT *DL, PHASE, MULTIPACK*	●	7 W	2700 K	670 lm	95 lm/W
			3000 K	680 lm	97 lm/W
			4000 K	690 lm	98 lm/W
			6500 K	680 lm	96 lm/W



			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L80B50	38°	✓	-20°C – 40°C	3 kg		×	**1008066**	**289.00**





L x W x H (mm):
88 x 88 x 35



Ø x L (mm):
88 x 35

Product description	Colour	Product no.	EUR
UNIVERSAL DOWNLIGHT *COVER, PIVOTING, ROUND, IP20*	●	**1007091**	**3.19**
UNIVERSAL DOWNLIGHT *COVER, PIVOTING, ROUND, IP20*	○	**1007092**	**3.19**
UNIVERSAL DOWNLIGHT *COVER, PIVOTING, SQUARE, IP20*	●	**1007184**	**4.19**
UNIVERSAL DOWNLIGHT *COVER, PIVOTING, SQUARE, IP20*	○	**1007185**	**4.19**
UNIVERSAL DOWNLIGHT *COVER, FIXED, ROUND, IP65*	●	**1008067**	**3.19**
UNIVERSAL DOWNLIGHT *COVER, FIXED, ROUND, IP65*	○	**1008068**	**3.19**
UNIVERSAL DOWNLIGHT *COVER, FIXED, SQUARE, IP65*	○	**1008095**	**3.19**
UNIVERSAL DOWNLIGHT *COVER, FIXED, SQUARE, IP65*	●	**1008096**	**3.19**

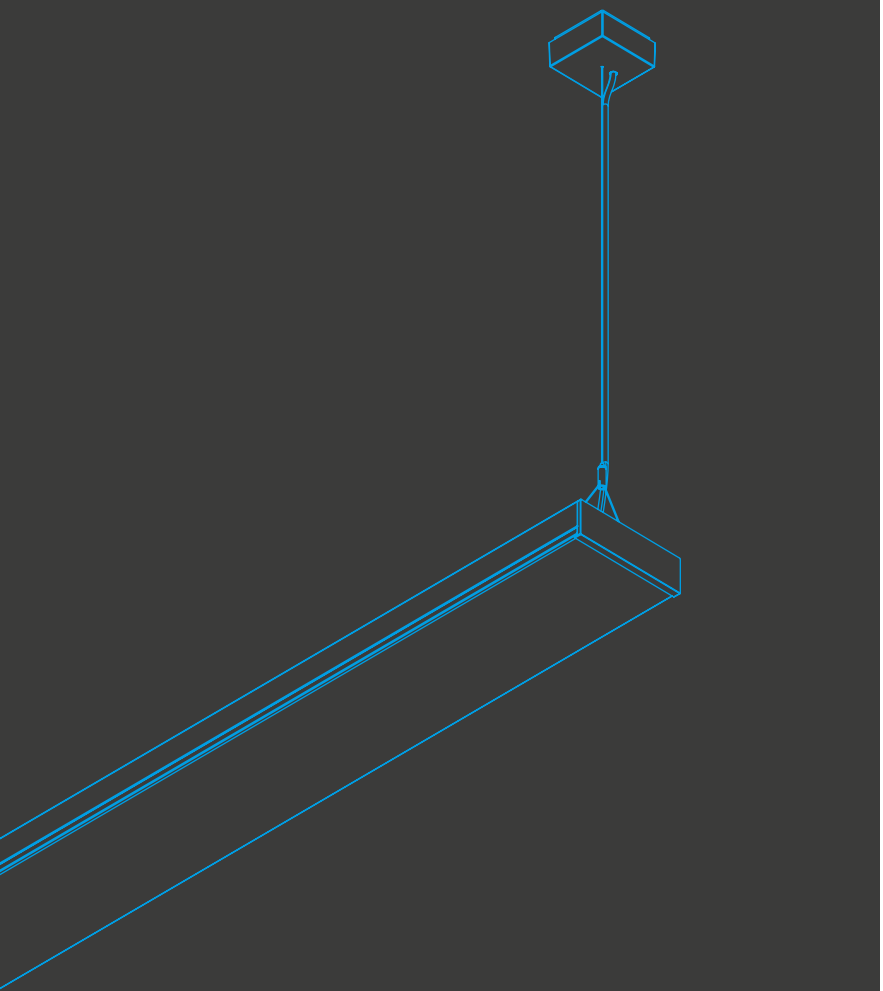


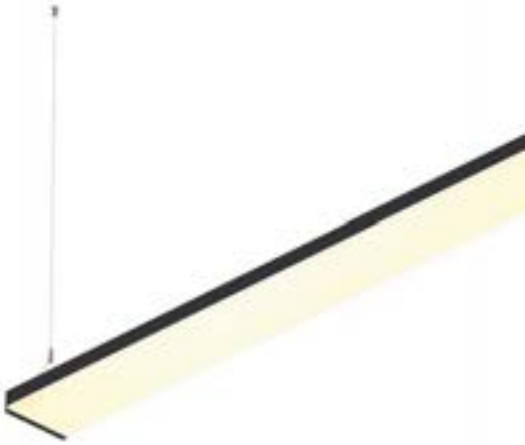

3000 K

or

4000 K

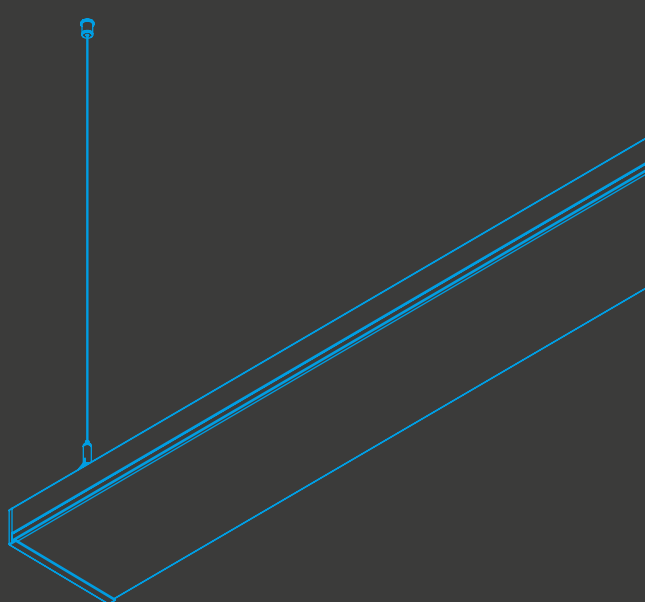



WORKLIGHT LINE P

UGR < 19

PRODUCT ADVANTAGES

High visual comfort in the workplace thanks to **UGR<19** and optimised light distribution.

Uniform room lighting achieved through **direct and indirect light distribution** (uplight and downlight).

Flexibly adaptable thanks to **multi-lumen and multi-colour** options to suit different project requirements.

Halogen-free - environmentally friendly and safe

DALI DT8-compatible and therefore suitable for **modern lighting control systems**.

A long lifespan of up to **100,000 h** for cost-effective and durable lighting solutions.

MULTI LUMEN **MULTI COLOR**




Setting the switching functions



WORKLIGHT LINE

INDOOR

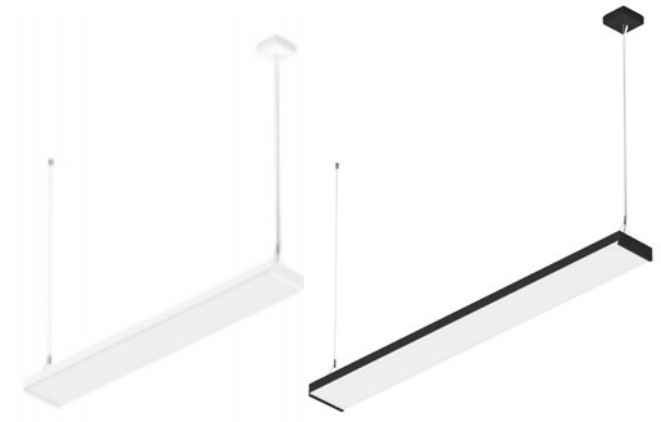



WORKLIGHT LINE P

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
WORKLIGHT P LINE 1200 52 830/840 WB ML *DALI DT8 WH*	○	26-50 W	3000 K	3500-6800 lm	136 lm/W
WORKLIGHT P LINE 1200 52 830/840 WB ML *DALI DT8 BK*	●	26-50 W	3000 K	3500-6500 lm	135 lm/W
WORKLIGHT P LINE 1200 52 830/840 WB ML *DALI DT8 SI*	◌	26-50 W	3000 K	3500-6500 lm	135 lm/W
WORKLIGHT P LINE 1500 65 830/840 WB ML *DALI DT8 WH*	○	33-60 W	3000 K	4600-8000 lm	139 lm/W
WORKLIGHT P LINE 1500 65 830/840 WB ML *DALI DT8 BK*	●	33-60 W	3000 K	4600-8000 lm	139 lm/W
WORKLIGHT P LINE 1500 65 830/840 WB ML *DALI DT8 SI*	◌	33-60 W	3000 K	4600-8000 lm	139 lm/W






	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	<19	90°	×	-20°C – 40°C	4 kg	Dali	✓	**1011574**	**380.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	4 kg	Dali	✓	**1011575**	**380.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	4 kg	Dali	✓	**1011576**	**380.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	4,9 kg	Dali	✓	**1011577**	**445.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	4,9 kg	Dali	✓	**1011578**	**445.00**
100 000 h L80B10	<19	90°	×	-20°C – 40°C	4,9 kg	Dali	✓	**1011579**	**445.00**

BATTEN

INDOOR





BATTEN P

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK04 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting luminous flux
BATTEN P 600 28 830/840/850 *ML WH*	○	11-20 W	3000 K	1530-2620 lm	139 lm/W	–
			4000 K	1670-2970 lm	152 lm/W	
			5000 K	1650-2830 lm	150 lm/W	
BATTEN P 1200 52 830/840/850 *ML WH*	○	20-35 W	3000 K	2980-4870 lm	149 lm/W	–
			4000 K	3230-5520 lm	161 lm/W	
			5000 K	3220-5250 lm	161 lm/W	
BATTEN P 1200 52 830/840/850 *ML WH EM 3H*	○	20-35 W	3000 K	2980-4870 lm	149 lm/W	450 lm
			4000 K	3230-5520 lm	161 lm/W	450 lm
			5000 K	3220-5250 lm	161 lm/W	470 lm
BATTEN P 1200 52 830/840/850 *ML WH PIR*	○	20-35 W	3000 K	2980-4870 lm	149 lm/W	–
			4000 K	3230-5520 lm	161 lm/W	
			5000 K	3220-5250 lm	161 lm/W	
BATTEN P 1200 52 830/840/850 *ML WH DALI*	○	20-35 W	3000 K	2980-4870 lm	149 lm/W	–
			4000 K	3230-5520 lm	161 lm/W	
			5000 K	3220-5250 lm	161 lm/W	
BATTEN P 1200 52 830/840/850 *ML WH DALI EM 3H*	○	20-35 W	3000 K	2980-4870 lm	149 lm/W	450 lm
			4000 K	3230-5520 lm	161 lm/W	450 lm
			5000 K	3220-5250 lm	161 lm/W	470 lm





			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	140°	×	-20°C – 40°C	0,5 kg	On/Off	✓	**1009251**	**50.00**
100 000 h L80B10	140°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1009252**	**70.00**
100 000 h L80B10	140°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1009253**	**130.00**
100 000 h L80B10	140°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1009254**	**100.00**
100 000 h L80B10	140°	×	-20°C – 40°C	0,8 kg	Dali	✓	**1009258**	**120.00**
100 000 h L80B10	140°	×	-20°C – 40°C	0,8 kg	Dali	✓	**1009259**	**200.00**

BATTEN

INDOOR




BATTEN P

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK04 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting luminous flux
BATTEN P 1500 72 830/840/850 *ML WH*	○	28-48 W	3000 K	4210-6780 lm	150 lm/W	–
			4000 K	4580-7650 lm	163 lm/W	
			5000 K	4550-7310 lm	162 lm/W	
BATTEN P 1500 72 830/840/850 *ML WH EM 3H*	○	28-48 W	3000 K	4210-6780 lm	150 lm/W	450 lm
			4000 K	4580-7650 lm	163 lm/W	450 lm
			5000 K	4550-7310 lm	162 lm/W	470 lm
BATTEN P 1500 72 830/840/850 *ML WH PIR*	○	28-48 W	3000 K	4210-6780 lm	150 lm/W	–
			4000 K	4580-7650 lm	163 lm/W	
			5000 K	4550-7310 lm	162 lm/W	
BATTEN P 1500 72 830/840/850 *ML WH DALI*	○	28-48 W	3000 K	4210-6780 lm	150 lm/W	–
			4000 K	4580-7650 lm	163 lm/W	
			5000 K	4550-7310 lm	162 lm/W	
BATTEN P 1500 72 830/840/850 *ML WH DALI EM 3H*	○	28-48 W	3000 K	4210-6780 lm	150 lm/W	450 lm
			4000 K	4580-7650 lm	163 lm/W	450 lm
			5000 K	4550-7310 lm	162 lm/W	470 lm





			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	140°	×	-20°C – 40°C	1 kg	On/Off	✓	**1009255**	**80.00**
100 000 h L80B10	140°	×	-20°C – 40°C	1 kg	On/Off	✓	**1009256**	**140.00**
100 000 h L80B10	140°	×	-20°C – 40°C	1 kg	On/Off	✓	**1009257**	**110.00**
100 000 h L80B10	140°	×	-20°C – 40°C	1 kg	Dali	✓	**1009260**	**120.00**
100 000 h L80B10	140°	×	-20°C – 40°C	1 kg	Dali	✓	**1009261**	**185.00**



L (mm): 2000


Product description	Colour	Product no.	EUR
BATTEN P SCK2000 *2000MM*	◐	**1009262**	**10.00**
BATTEN P REMOTE CONTROL PIR SENSOR	–	**1011005**	**13.00**

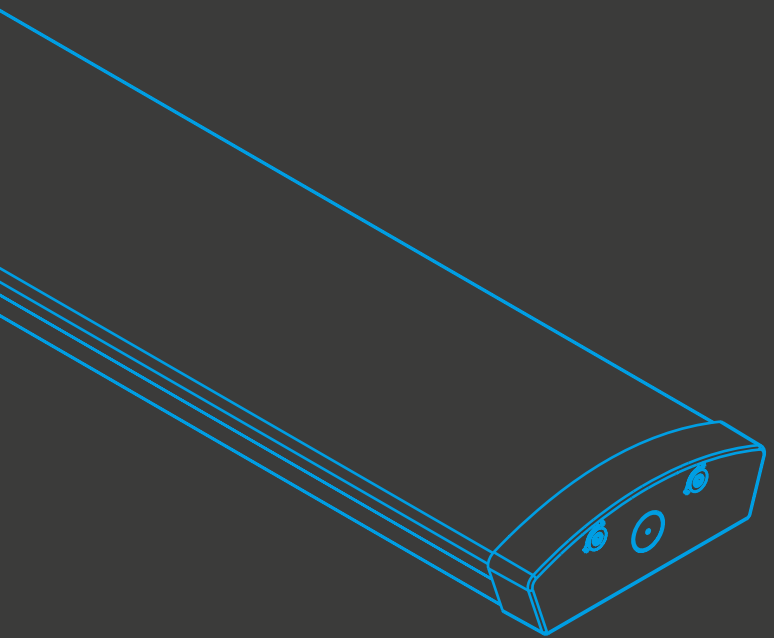

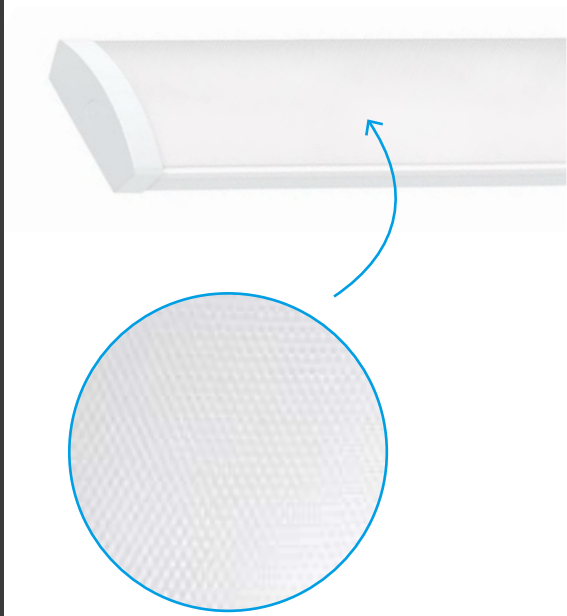

Microprismatic surface

EASY TO OPEN

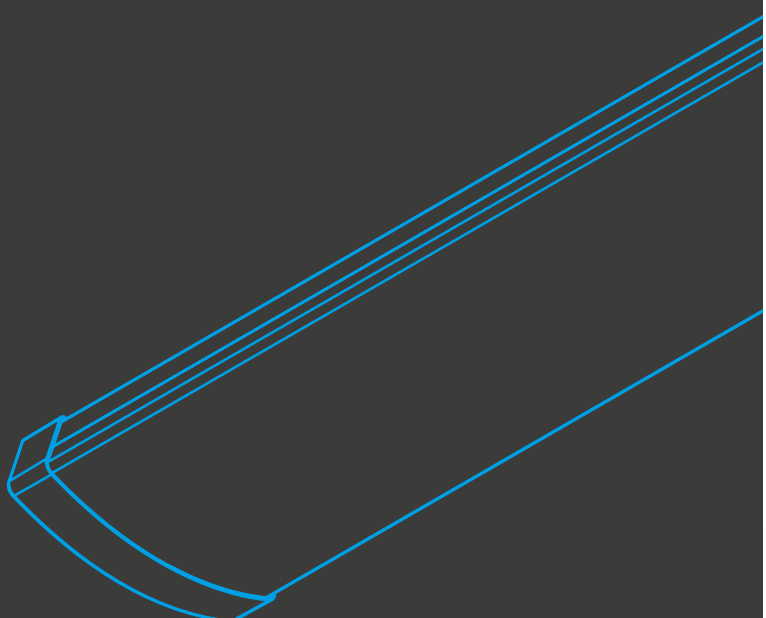





BATTEN FLAT

Optional beam angle **120°**

PRODUCT ADVANTAGES

Low glare for pleasant indoor lighting

Halogen-free – environmentally friendly and safe


Lifespan of up to **100,000 hours**

EASY TO INSTALL thanks to the smart end cap – easy to open, quick installation

Flexible and adaptable thanks to **Multi-Lumen** and **Multi-Colour**

Available upon request: integrated emergency lighting function, smart microwave sensors with presence and daylight control and flexible DALI2 or 0 – 10V-dimming options

MULTI LUMEN **MULTI COLOR**

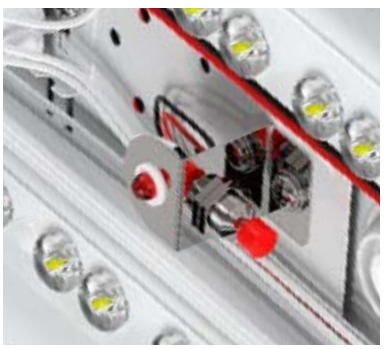

Integrated emergency lighting module – up to 3 hours' runtime in the event of a power cut.



Adjustable luminous flux



Selectable colour temperature – DIP switch on the driver for 1010907, 1010908, 1010909, 1010911, 1010916 and 1010918



Selectable colour temperature – external DIP switch on 1011094, 1010910, 1010912, 1010913, 1010914, 1010915, 1010917, 1010919, 1010928, 1010929, 1010930, 1010919, 1010928, 1010929 and 1010930

BATTEN FLAT


INDOOR

BATTEN FLAT P

Mains voltage: 220-240 V ~0/50/60 Hz

IP44 IK04 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting luminous flux
BATTEN FLAT P 1200 52 830/840/850 ML *WH*	○	19-33 W	3000 K	2700-4500 lm	136 lm/W	–
			4000 K	2800-4800 lm	145 lm/W	
			5000 K	2800-4700 lm	142 lm/W	
BATTEN FLAT P 1200 52 830/840/850 ML *DALI2 WH*	○	20-34 W	3000 K	2700-4500 lm	135 lm/W	–
			4000 K	2800-4800 lm	141 lm/W	
			5000 K	2800-4700 lm	140 lm/W	
BATTEN FLAT P 1200 52 830/840/850 ML *MICROWAVE WH*	○	19-34 W	3000 K	2800-4700 lm	147 lm/W	–
			4000 K	2900-5000 lm	153 lm/W	
			5000 K	2900-4900 lm	153 lm/W	
BATTEN FLAT P 1200 52 830/840/850 ML *EM 3H WH*	○	19-34 W	3000 K	2800-4700 lm	147 lm/W	450 lm
			4000 K	2900-5000 lm	153 lm/W	450 lm
			5000 K	2900-4900 lm	153 lm/W	470 lm
BATTEN FLAT P 1200 52 830/840/850 ML *DALI2 EM 3H WH*	○	19-34 W	3000 K	2600-4500 lm	137 lm/W	450 lm
			4000 K	2700-4800 lm	142 lm/W	450 lm
			5000 K	2700-4700 lm	142 lm/W	470 lm



		UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	3,2 kg	On/Off	✓	**1010909**	**140.00**
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	3,4 kg	Dali	✓	**1010910**	**180.00**
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	3,2 kg	On/Off	✓	**1010911**	**160.00**
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	3,6 kg	On/Off	✓	**1010912**	**210.00**
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	3,8 kg	Dali	✓	**1010913**	**260.00**

BATTEN FLAT


INDOOR

BATTEN FLAT P

Mains voltage: 220-240 V ~0/50/60 Hz

IP44 IK04 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting luminous flux
BATTEN FLAT P 1500 72 830/840/850 ML *WH*	○	27-47 W	3000 K	3700-6400 lm	137 lm/W	–
			4000 K	4000-7000 lm	149 lm/W	
			5000 K	4000-6800 lm	148 lm/W	
BATTEN FLAT P 1500 72 830/840/850 ML *DALI2 WH*	○	28-49 W	3000 K	3700-6400 lm	132 lm/W	–
			4000 K	4000-7000 lm	143 lm/W	
			5000 K	4000-6800 lm	143 lm/W	
BATTEN FLAT P 1500 72 830/840/850 ML *MICROWAVE WH*	○	27-49 W	3000 K	4000-6900 lm	148 lm/W	–
			4000 K	4200-7300 lm	156 lm/W	
			5000 K	4200-7300 lm	156 lm/W	
BATTEN FLAT P 1500 72 830/840/850 ML *EM 3H WH*	○	27-49 W	3000 K	4000-6900 lm	148 lm/W	450 lm
			4000 K	4200-7300 lm	156 lm/W	450 lm
			5000 K	4200-7300 lm	156 lm/W	470 lm
BATTEN FLAT P 1500 72 830/840/850 ML *DALI2 EM 3H WH*	○	27-49 W	3000 K	4100-7000 lm	141 lm/W	450 lm
			4000 K	4200-7400 lm	148 lm/W	450 lm
			5000 K	4200-7300 lm	146 lm/W	470 lm



					Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	3,7 kg	On/Off	✓	**1010916**	**170.00**
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	3,9 kg	Dali	✓	**1010917**	**210.00**
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	3,8 kg	On/Off	✓	**1010918**	**190.00**
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	4 kg	On/Off	✓	**1010919**	**240.00**
	100 000 h L80B10	25	120°	✓	-20°C – 40°C	4,2 kg	Dali	✓	**1010928**	**290.00**

BATTEN FLAT

INDOOR



1010931

L x W x H (mm):

130 x 70 x 35



1010932

L x W x H (mm):

85 x 30 x 12

L (mm):

2000



1010933

L x W x H (mm):

40 x 35 x 32

OPTIONAL ACCESSORIES

Product description	Colour	Product no.	EUR
BATTEN FLAT P WALL BRACKETS *2PCS*		**1010931**	**13.00**
BATTEN FLAT P SUSPENSION KITS WITH 2M *2PCS*		**1010932**	**18.00**
BATTEN FLAT P HORIZONTAL CABLE WIRE SUSPENSION KITS *2PCS*		**1010933**	**7.00**

BATTEN INDUSTRY

INDOOR




BATTEN INDUSTRY C

Mains voltage: 220-240 V ~0/50/60 Hz

IP23 IK02 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
BATTEN INDUSTRY C 1208 114 840 NB ML WH	○	38-67 W	4000 K	7000-12100 lm	184 lm/W
BATTEN INDUSTRY C 1208 114 840 MB ML WH	○	38-67 W	4000 K	7000-12100 lm	184 lm/W
BATTEN INDUSTRY C 1208 114 840 WB ML WH	○	38-67 W	4000 K	7000-12100 lm	184 lm/W
BATTEN INDUSTRY C 1208 114 840 NB ML WH DALI	○	38-68 W	4000 K	7100-12100 lm	187 lm/W
BATTEN INDUSTRY C 1208 114 840 MB ML WH DALI	○	39-68 W	4000 K	7100-12100 lm	182 lm/W
BATTEN INDUSTRY C 1208 114 840 WB ML WH DALI	○	39-68 W	4000 K	7100-12100 lm	182 lm/W



			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	33°	×	-20°C – 40°C	4 kg	On/Off	✓	**1011163**	**200.00**
100 000 h L80B10	60°	×	-20°C – 40°C	4 kg	On/Off	✓	**1011164**	**200.00**
100 000 h L80B10	88°	×	-20°C – 40°C	4 kg	On/Off	✓	**1011165**	**200.00**
100 000 h L80B10	33°	×	-20°C – 40°C	4 kg	Dali	✓	**1011166**	**240.00**
100 000 h L80B10	60°	×	-20°C – 40°C	4 kg	Dali	✓	**1011167**	**240.00**
100 000 h L80B10	88°	×	-20°C – 40°C	4 kg	Dali	✓	**1011168**	**240.00**

BATTEN INDUSTRY

INDOOR




BATTEN INDUSTRY C

Mains voltage: 220-240 V ~0/50/60 Hz

IP23 IK02 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
BATTEN INDUSTRY C 1782 130 840 NB ML WH	○	32-75 W	4000 K	6100-13400 lm	191 lm/W
BATTEN INDUSTRY C 1782 130 840 MB ML WH	○	32-75 W	4000 K	6100-13400 lm	191 lm/W
BATTEN INDUSTRY C 1782 130 840 WB ML WH	○	32-75 W	4000 K	6100-13400 lm	191 lm/W
BATTEN INDUSTRY C 1782 166 840 NB ML WH	○	66-96 W	4000 K	12300-17300 lm	186 lm/W
BATTEN INDUSTRY C 1782 166 840 MB ML WH	○	66-96 W	4000 K	12300-17300 lm	186 lm/W
BATTEN INDUSTRY C 1782 166 840 WB ML WH	○	66-96 W	4000 K	12300-17300 lm	186 lm/W
BATTEN INDUSTRY C 1782 228 840 NB ML WH	○	77-136 W	4000 K	14300-23700 lm	186 lm/W
BATTEN INDUSTRY C 1782 228 840 MB ML WH	○	77-136 W	4000 K	14300-23700 lm	186 lm/W
BATTEN INDUSTRY C 1782 228 840 WB ML WH	○	77-136 W	4000 K	14300-23700 lm	186 lm/W



			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	33°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011169**	**240.00**
100 000 h L80B10	60°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011170**	**240.00**
100 000 h L80B10	88°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011171**	**240.00**
100 000 h L80B10	33°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011172**	**250.00**
100 000 h L80B10	60°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011173**	**250.00**
100 000 h L80B10	88°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011174**	**250.00**
100 000 h L80B10	33°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011175**	**270.00**
100 000 h L80B10	60°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011176**	**270.00**
100 000 h L80B10	88°	×	-20°C – 40°C	4,8 kg	On/Off	✓	**1011177**	**270.00**

BATTEN INDUSTRY

INDOOR




BATTEN INDUSTRY C

Mains voltage: 220-240 V ~0/50/60 Hz

IP23 IK02 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
BATTEN INDUSTRY C 1782 130 840 NB ML WH DALI	○	32-74 W	4000 K	6100-13400 lm	191 lm/W
BATTEN INDUSTRY C 1782 130 840 MB ML WH DALI	○	32-74 W	4000 K	6100-13400 lm	191 lm/W
BATTEN INDUSTRY C 1782 130 840 WB ML WH DALI	○	32-74 W	4000 K	6100-13400 lm	191 lm/W
BATTEN INDUSTRY C 1782 166 840 NB ML WH DALI	○	66-95 W	4000 K	12400-17300 lm	188 lm/W
BATTEN INDUSTRY C 1782 166 840 MB ML WH DALI	○	66-95 W	4000 K	12400-17300 lm	188 lm/W
BATTEN INDUSTRY C 1782 166 840 WB ML WH DALI	○	66-95 W	4000 K	12400-17300 lm	188 lm/W
BATTEN INDUSTRY C 1782 228 840 NB ML WH DALI	○	78-138 W	4000 K	14300-24000 lm	183 lm/W
BATTEN INDUSTRY C 1782 228 840 MB ML WH DALI	○	78-138 W	4000 K	14300-24000 lm	183 lm/W
BATTEN INDUSTRY C 1782 228 840 WB ML WH DALI	○	78-138 W	4000 K	14300-24000 lm	183 lm/W



			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	33°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011178**	**290.00**
100 000 h L80B10	60°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011179**	**290.00**
100 000 h L80B10	88°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011180**	**290.00**
100 000 h L80B10	33°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011181**	**290.00**
100 000 h L80B10	60°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011182**	**290.00**
100 000 h L80B10	88°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011183**	**290.00**
100 000 h L80B10	33°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011184**	**310.00**
100 000 h L80B10	60°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011185**	**310.00**
100 000 h L80B10	88°	×	-20°C – 40°C	4,8 kg	Dali	✓	**1011186**	**310.00**

BATTEN INDUSTRY

INDOOR






Product description	Colour	Product no.	EUR
BATTEN INDUSTRY C+P SCK 2000 STEEL CABLE SUSPENSION KITS 2000MM	○	**1011842**	**11.00**
BATTEN INDUSTRY C+P TRACK ADAPTER WH	○	**1011843**	**18.00**
BATTEN INDUSTRY C+P TRACK ADAPTER DALI WH	○	**1011844**	**33.00**
BATTEN INDUSTRY C+P TRACK KNOB SWITCH	○	**1011845**	**7.00**

TRACKSPOT

INDOOR




TRACKSPOT V

Mains voltage: 220-240 V ~50/60 Hz

IP20 IK03 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT V *3-PHASE 18W 930 36°*	○	13-42 W	3000 K	1710-5300 lm	135 lm/W
TRACKSPOT V *3-PHASE 18W 930 36°*	●	13-42 W	3000 K	1710-5300 lm	135 lm/W
TRACKSPOT V *3-PHASE 18W 930 50°*	○	13-42 W	3000 K	1710-5300 lm	135 lm/W
TRACKSPOT V *3-PHASE 18W 930 50°*	●	13-42 W	3000 K	1710-5300 lm	135 lm/W
TRACKSPOT V *3-PHASE 18W 940 36°*	○	13-42 W	4000 K	1800-5590 lm	142 lm/W
TRACKSPOT V *3-PHASE 18W 940 36°*	●	13-42 W	4000 K	1800-5590 lm	142 lm/W
TRACKSPOT V *3-PHASE 18W 940 50°*	○	13-42 W	4000 K	1800-5590 lm	142 lm/W
TRACKSPOT V *3-PHASE 18W 940 50°*	●	13-42 W	4000 K	1800-5590 lm	142 lm/W
TRACKSPOT V *3-PHASE 32W 930 36°*	○	13-42 W	3000 K	1700-5300 lm	135 lm/W
TRACKSPOT V *3-PHASE 32W 930 36°*	●	13-42 W	3000 K	1700-5300 lm	135 lm/W
TRACKSPOT V *3-PHASE 32W 930 50°*	○	13-42 W	3000 K	1700-5300 lm	135 lm/W
TRACKSPOT V *3-PHASE 32W 930 50°*	●	13-42 W	3000 K	1700-5300 lm	135 lm/W
TRACKSPOT V *3-PHASE 32W 940 36°*	○	13-42 W	4000 K	1800-5560 lm	144 lm/W
TRACKSPOT V *3-PHASE 32W 940 36°*	●	13-42 W	4000 K	1800-5560 lm	144 lm/W
TRACKSPOT V *3-PHASE 32W 940 50°*	○	13-42 W	4000 K	1800-5560 lm	144 lm/W
TRACKSPOT V *3-PHASE 32W 940 50°*	●	13-42 W	4000 K	1800-5560 lm	144 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008844**	**90.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008845**	**90.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008846**	**90.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008847**	**90.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008848**	**90.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008849**	**90.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008850**	**90.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008851**	**90.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008852**	**110.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008853**	**110.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008854**	**110.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008855**	**110.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008856**	**110.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008857**	**110.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008858**	**110.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008859**	**110.00**

TRACKSPOT

INDOOR




TRACKSPOT V

Mains voltage: 220-240 V ~50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT V 3PH. 45 927 *MB ML BK*	●	13-42 W	2700 K	1660-5270 lm	139 lm/W
TRACKSPOT V 3PH. 45 927 *WB ML BK*	●	13-42 W	2700 K	1630-5130 lm	131 lm/W
TRACKSPOT V 3PH. 46 927 *VWB ML BK*	●	13-42 W	2700 K	1660-5190 lm	134 lm/W
TRACKSPOT V 3PH. 51 927 *MB ML WH*	○	13-42 W	2700 K	1660-5270 lm	139 lm/W
TRACKSPOT V 3PH. 51 927 *WB ML WH*	○	13-42 W	2700 K	1630-5130 lm	131 lm/W
TRACKSPOT V 3PH. 51 927 *VWB ML WH*	○	13-42 W	2700 K	1660-5190 lm	134 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011095**	**110.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011096**	**110.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011097**	**110.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011098**	**110.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011099**	**110.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011100**	**110.00**

TRACKSPOT

INDOOR




TRACKSPOT V


Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT V 3PH. 53 930 *NB ML WH DALI SAN*	○	12-41 W	3000 K	1710-5270 lm	136 lm/W
TRACKSPOT V 3PH. 53 930 *MB ML WH DALI SAN*	○	12-41 W	3000 K	1710-5340 lm	135 lm/W
TRACKSPOT V 3PH. 53 930 *WB ML WH DALI SAN*	○	12-41 W	3000 K	1710-5320 lm	135 lm/W
TRACKSPOT V 3PH. 53 930 *NB ML BK DALI SAN*	●	12-41 W	3000 K	1710-5270 lm	136 lm/W
TRACKSPOT V 3PH. 53 930 *MB ML BK DALI SAN*	●	12-41 W	3000 K	1710-5340 lm	135 lm/W
TRACKSPOT V 3PH. 53 930 *WB ML BK DALI SAN*	●	12-41 W	3000 K	1710-5320 lm	135 lm/W
TRACKSPOT V 3PH. 55 940 *NB ML WH DALI SAN*	○	12-41 W	4000 K	1800-5540 lm	143 lm/W
TRACKSPOT V 3PH. 55 940 *MB ML WH DALI SAN*	○	12-41 W	4000 K	1790-5560 lm	142 lm/W
TRACKSPOT V 3PH. 55 940 *WB ML WH DALI SAN*	○	12-41 W	4000 K	1800-5540 lm	142 lm/W
TRACKSPOT V 3PH. 55 940 *NB ML BK DALI SAN*	●	12-41 W	4000 K	1800-5540 lm	143 lm/W
TRACKSPOT V 3PH. 55 940 *MB ML BK DALI SAN*	●	12-41 W	4000 K	1790-5560 lm	142 lm/W
TRACKSPOT V 3PH. 55 940 *WB ML BK DALI SAN*	●	12-41 W	4000 K	1800-5540 lm	142 lm/W



Retrofit solution for existing 3-phase track lighting systems: DALI Trackspot with adapter for standard 3-phase tracks, allowing use of the existing infrastructure without replacing the track. The DALI signal is transmitted via L2 and L3, thereby eliminating the need for phase selection.



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011139**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011140**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011141**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011142**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011143**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011144**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011145**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011146**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011147**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011148**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011149**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011150**	**165.00**

TRACKSPOT

INDOOR




TRACKSPOT V

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT V 3PH 53 930 *NB ML WH DALI*	○	12-41 W	3000 K	1710-5270 lm	136 lm/W
TRACKSPOT V 3PH 53 930 *MB ML WH DALI*	○	12-41 W	3000 K	1710-5340 lm	135 lm/W
TRACKSPOT V 3PH 53 930 *WB ML WH DALI*	○	12-41 W	3000 K	1710-5320 lm	135 lm/W
TRACKSPOT V 3PH 53 930 *NB ML BK DALI*	●	12-41 W	3000 K	1800-5540 lm	143 lm/W
TRACKSPOT V 3PH 53 930 *MB ML BK DALI*	●	12-41 W	3000 K	1790-5560 lm	142 lm/W
TRACKSPOT V 3PH 53 930 *WB ML BK DALI*	●	12-41 W	3000 K	1800-5540 lm	142 lm/W
TRACKSPOT V 3PH 55 940 *NB ML WH DALI*	○	12-41 W	4000 K	1710-5270 lm	136 lm/W
TRACKSPOT V 3PH 55 940 *MB ML WH DALI*	○	12-41 W	4000 K	1710-5340 lm	135 lm/W
TRACKSPOT V 3PH 55 940 *WB ML WH DALI*	○	12-41 W	4000 K	1710-5320 lm	135 lm/W
TRACKSPOT V 3PH 55 940 *NB ML BK DALI*	●	12-41 W	4000 K	1800-5540 lm	143 lm/W
TRACKSPOT V 3PH 55 940 *MB ML BK DALI*	●	12-41 W	4000 K	1790-5560 lm	142 lm/W
TRACKSPOT V 3PH 55 940 *WB ML BK DALI*	●	12-41 W	4000 K	1800-5540 lm	142 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011801**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011802**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011803**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011804**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011805**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011806**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011807**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011808**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011809**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011810**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011811**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011812**	**165.00**

TRACKSPOT

INDOOR




TRACKSPOT C

Mains voltage: 220-240 V ~50/60 Hz

IP20 IK03 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT C *3-PHASE 17W 930 36°*	○	17-23 W	3000 K	2550-3310 lm	145 lm/W
TRACKSPOT C *3-PHASE 17W 930 36°*	●	17-23 W	3000 K	2550-3310 lm	145 lm/W
TRACKSPOT C *3-PHASE 17W 930 50°*	○	17-23 W	3000 K	2540-3280 lm	145 lm/W
TRACKSPOT C *3-PHASE 17W 930 50°*	●	17-23 W	3000 K	2540-3280 lm	145 lm/W
TRACKSPOT C *3-PHASE 17W 940 36°*	○	17-23 W	4000 K	2680-3500 lm	154 lm/W
TRACKSPOT C *3-PHASE 17W 940 36°*	●	17-23 W	4000 K	2680-3500 lm	154 lm/W
TRACKSPOT C *3-PHASE 17W 940 50°*	○	17-23 W	4000 K	2700-3460 lm	153 lm/W
TRACKSPOT C *3-PHASE 17W 940 50°*	●	17-23 W	4000 K	2700-3460 lm	153 lm/W
TRACKSPOT C *3-PHASE 29W 930 36°*	○	25-31 W	3000 K	4050 lm	139 lm/W
TRACKSPOT C *3-PHASE 29W 930 36°*	●	25-31 W	3000 K	4050 lm	139 lm/W
TRACKSPOT C *3-PHASE 29W 930 50°*	○	25-31 W	3000 K	4050 lm	139 lm/W
TRACKSPOT C *3-PHASE 29W 930 50°*	●	25-31 W	3000 K	4050 lm	139 lm/W
TRACKSPOT C *3-PHASE 29W 940 36°*	○	25-31 W	4000 K	4200 lm	144 lm/W
TRACKSPOT C *3-PHASE 29W 940 36°*	●	25-31 W	4000 K	4200 lm	144 lm/W
TRACKSPOT C *3-PHASE 29W 940 50°*	○	25-31 W	4000 K	4200 lm	144 lm/W
TRACKSPOT C *3-PHASE 29W 940 50°*	●	25-31 W	4000 K	4200 lm	144 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008860**	**100.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008861**	**100.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008862**	**100.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008863**	**100.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008864**	**100.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008865**	**100.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008866**	**100.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008867**	**100.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008868**	**120.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008869**	**120.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008870**	**120.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008871**	**120.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008872**	**120.00**
50 000 h L70B50	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008873**	**120.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008874**	**120.00**
50 000 h L70B50	25	50°	90°	×	-20°C – 35°C	0,7 kg	On/Off	×	**1008875**	**120.00**

TRACKSPOT

INDOOR




TRACKSPOT C

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT C 3PH. 48 927 *MB ML BK*	●	13-42 W	2700 K	1630-5150 lm	139 lm/W
TRACKSPOT C 3PH. 48 927 *WB ML BK*	●	13-42 W	2700 K	1620-5050 lm	137 lm/W
TRACKSPOT C 3PH. 53 927 *VWB ML BK*	●	13-42 W	2700 K	1630-5050 lm	138 lm/W
TRACKSPOT C 3PH. 53 927 *MB ML WH*	○	13-42 W	2700 K	1630-5150 lm	139 lm/W
TRACKSPOT C 3PH. 53 927 *WB ML WH*	○	13-42 W	2700 K	1620-5050 lm	137 lm/W
TRACKSPOT C 3PH. 53 927 *VWB ML WH*	○	13-42 W	2700 K	1630-5050 lm	138 lm/W



						Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011101**	**120.00**
	50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011102**	**120.00**
	50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011103**	**120.00**
	50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011104**	**120.00**
	50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011105**	**120.00**
	50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,7 kg	On/Off	✓	**1011106**	**120.00**

TRACKSPOT

INDOOR




TRACKSPOT C


Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT C 3PH. 53 930 *NB ML WH DALI SAN*	○	12-41 W	3000 K	1710-5270 lm	136 lm/W
TRACKSPOT C 3PH. 53 930 *MB ML WH DALI SAN*	○	12-41 W	3000 K	1710-5340 lm	135 lm/W
TRACKSPOT C 3PH. 53 930 *WB ML WH DALI SAN*	○	12-41 W	3000 K	1710-5320 lm	135 lm/W
TRACKSPOT C 3PH. 53 930 *NB ML BK DALI SAN*	●	12-41 W	3000 K	1710-5270 lm	136 lm/W
TRACKSPOT C 3PH. 53 930 *MB ML BK DALI SAN*	●	12-41 W	3000 K	1710-5340 lm	135 lm/W
TRACKSPOT C 3PH. 53 930 *WB ML BK DALI SAN*	●	12-41 W	3000 K	1710-5320 lm	135 lm/W
TRACKSPOT C 3PH. 55 940 *NB ML WH DALI SAN*	○	12-41 W	4000 K	1800-5540 lm	143 lm/W
TRACKSPOT C 3PH. 55 940 *MB ML WH DALI SAN*	○	12-41 W	4000 K	1790-5560 lm	142 lm/W
TRACKSPOT C 3PH. 55 940 *WB ML WH DALI SAN*	○	12-41 W	4000 K	1800-5540 lm	142 lm/W
TRACKSPOT C 3PH. 55 940 *NB ML BK DALI SAN*	●	12-41 W	4000 K	1800-5540 lm	143 lm/W
TRACKSPOT C 3PH. 55 940 *MB ML BK DALI SAN*	●	12-41 W	4000 K	1790-5560 lm	142 lm/W
TRACKSPOT C 3PH. 55 940 *WB ML BK DALI SAN*	●	12-41 W	4000 K	1800-5540 lm	142 lm/W



Retrofit solution for existing 3-phase track lighting systems: DALI Trackspot with adapter for standard 3-phase tracks, allowing use of the existing infrastructure without replacing the track. The DALI signal is transmitted via L2 and L3, thereby eliminating the need for phase selection.



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011151**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011152**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011153**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011154**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011155**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011156**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011157**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011158**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011159**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011160**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011161**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011162**	**165.00**

TRACKSPOT

INDOOR




TRACKSPOT C

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT C 3PH 53 930 *NB ML WH DALI*	○	12-41 W	3000 K	1710-5270 lm	136 lm/W
TRACKSPOT C 3PH 53 930 *MB ML WH DALI*	○	12-41 W	3000 K	1710-5340 lm	135 lm/W
TRACKSPOT C 3PH 53 930 *WB ML WH DALI*	○	12-41 W	3000 K	1710-5320 lm	135 lm/W
TRACKSPOT C 3PH 53 930 *NB ML BK DALI*	●	12-41 W	3000 K	1800-5540 lm	143 lm/W
TRACKSPOT C 3PH 53 930 *MB ML BK DALI*	●	12-41 W	3000 K	1790-5560 lm	142 lm/W
TRACKSPOT C 3PH 53 930 *WB ML BK DALI*	●	12-41 W	3000 K	1800-5540 lm	142 lm/W
TRACKSPOT C 3PH 55 940 *NB ML WH DALI*	○	12-41 W	4000 K	1710-5270 lm	136 lm/W
TRACKSPOT C 3PH 55 940 *MB ML WH DALI*	○	12-41 W	4000 K	1710-5340 lm	135 lm/W
TRACKSPOT C 3PH 55 940 *WB ML WH DALI*	○	12-41 W	4000 K	1710-5320 lm	135 lm/W
TRACKSPOT C 3PH 55 940 *NB ML BK DALI*	●	12-41 W	4000 K	1800-5540 lm	143 lm/W
TRACKSPOT C 3PH 55 940 *MB ML BK DALI*	●	12-41 W	4000 K	1790-5560 lm	142 lm/W
TRACKSPOT C 3PH 55 940 *WB ML BK DALI*	●	12-41 W	4000 K	1800-5540 lm	142 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011813**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011828**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011814**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011815**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011816**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011817**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011818**	**165.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011819**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011820**	**165.00**
50 000 h L70B10	25	24°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011821**	**165.00**
50 000 h L70B10	25	36°	90°	ww	-20°C – 35°C	0,7 kg	Dali	✓	**1011822**	**165.00**
50 000 h L70B10	25	50°	90°	×	-20°C – 35°C	0,7 kg	Dali	✓	**1011823**	**165.00**

TRACKSPOT

INDOOR




TRACKSPOT P

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK03 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT P 3PH. 33 930 *MB ML BK*	●	17-22 W	3000 K	2780-3660 lm	163 lm/W
TRACKSPOT P 3PH. 33 930 *MB ML WH*	○	17-22 W	3000 K	2780-3660 lm	163 lm/W
TRACKSPOT P 3PH. 34 940 *MB ML BK*	●	17-22 W	4000 K	2940-3890 lm	172 lm/W
TRACKSPOT P 3PH. 34 940 *MB ML WH*	○	17-22 W	4000 K	2940-3890 lm	172 lm/W
TRACKSPOT P 3PH. 33 930 *WB ML BK*	●	17-22 W	3000 K	2850-3720 lm	165 lm/W
TRACKSPOT P 3PH. 33 930 *WB ML WH*	○	17-22 W	3000 K	2850-3720 lm	165 lm/W
TRACKSPOT P 3PH. 34 940 *WB ML BK*	●	17-22 W	4000 K	2940-3830 lm	172 lm/W
TRACKSPOT P 3PH. 34 940 *WB ML WH*	○	17-22 W	4000 K	2940-3830 lm	172 lm/W
TRACKSPOT P 3PH. 34 930 *VWB ML BK*	●	17-22 W	3000 K	2850-3770 lm	166 lm/W
TRACKSPOT P 3PH. 34 930 *VWB ML WH*	○	17-22 W	3000 K	2850-3770 lm	166 lm/W
TRACKSPOT P 3PH. 34 940 *VWB ML BK*	●	17-22 W	4000 K	2930-3860 lm	171 lm/W
TRACKSPOT P 3PH. 34 940 *VWB ML WH*	○	17-22 W	4000 K	2930-3860 lm	171 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010591**	**150.00**
50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010592**	**150.00**
50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010593**	**150.00**
50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010594**	**150.00**
50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010599**	**150.00**
50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010600**	**150.00**
50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010601**	**150.00**
50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010602**	**150.00**
50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010607**	**150.00**
50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010608**	**150.00**
50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010609**	**150.00**
50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010610**	**150.00**

TRACKSPOT

INDOOR




TRACKSPOT P

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK03 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT P 3PH. 56 930 *MB ML BK*	●	24-30 W	3000 K	4960-5750 lm	156 lm/W
TRACKSPOT P 3PH. 56 930 *MB ML WH*	○	24-30 W	3000 K	4960-5750 lm	156 lm/W
TRACKSPOT P 3PH. 57 940 *MB ML BK*	●	24-30 W	4000 K	5250-6100 lm	166 lm/W
TRACKSPOT P 3PH. 57 940 *MB ML WH*	○	24-30 W	4000 K	5250-6100 lm	166 lm/W
TRACKSPOT P 3PH. 56 930 *WB ML BK*	●	33-38 W	3000 K	4910-5740 lm	155 lm/W
TRACKSPOT P 3PH. 56 930 *WB ML WH*	○	33-38 W	3000 K	4910-5740 lm	155 lm/W
TRACKSPOT P 3PH. 57 940 *WB ML BK*	●	33-38 W	4000 K	5300-6130 lm	167 lm/W
TRACKSPOT P 3PH. 57 940 *WB ML WH*	○	33-38 W	4000 K	5300-6130 lm	167 lm/W
TRACKSPOT P 3PH. 57 930 *VWB ML BK*	●	33-38 W	3000 K	4850-5640 lm	155 lm/W
TRACKSPOT P 3PH. 57 930 *VWB ML WH*	○	33-38 W	3000 K	4850-5640 lm	155 lm/W
TRACKSPOT P 3PH. 58 940 *VWB ML BK*	●	33-38 W	4000 K	5310-6050 lm	165 lm/W
TRACKSPOT P 3PH. 58 940 *VWB ML WH*	○	33-38 W	4000 K	5310-6050 lm	165 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010595**	**150.00**
50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010596**	**150.00**
50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010597**	**150.00**
50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010598**	**150.00**
50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010603**	**150.00**
50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010604**	**150.00**
50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010605**	**150.00**
50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010606**	**150.00**
50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010611**	**150.00**
50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010612**	**150.00**
50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010613**	**150.00**
50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1010614**	**150.00**

TRACKSPOT

INDOOR




TRACKSPOT P

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT P 3PH. 61 927 *MB ML BK*	●	12-42 W	2700 K	1760-5790 lm	153 lm/W
TRACKSPOT P 3PH. 61 927 *WB ML BK*	●	12-42 W	2700 K	1730-5680 lm	151 lm/W
TRACKSPOT P 3PH. 61 927 *VWB ML BK*	●	12-42 W	2700 K	1740-5810 lm	151 lm/W
TRACKSPOT P 3PH. 62 927 *MB ML WH*	○	12-42 W	2700 K	1760-5790 lm	153 lm/W
TRACKSPOT P 3PH. 62 927 *WB ML WH*	○	12-42 W	2700 K	1730-5680 lm	151 lm/W
TRACKSPOT P 3PH. 62 927 *VWB ML WH*	○	12-42 W	2700 K	1740-5810 lm	151 lm/W



						Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1011088**	**150.00**
	50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1011089**	**150.00**
	50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1011090**	**150.00**
	50 000 h L80B10	25	36°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1011091**	**150.00**
	50 000 h L80B10	25	47°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1011092**	**150.00**
	50 000 h L80B10	25	60°	90°	×	-20°C – 40°C	0,8 kg	On/Off	✓	**1011093**	**150.00**

TRACKSPOT

INDOOR




TRACKSPOT P

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT P 3PH 58 930 *MB ML BK DALI*	●	12-41 W	3000 K	1870-6040 lm	150 lm/W
TRACKSPOT P 3PH 58 930 *WB ML BK DALI*	●	12-41 W	3000 K	1880-6080 lm	152 lm/W
TRACKSPOT P 3PH 59 930 *VWB ML BK DALI*	●	12-41 W	3000 K	1880-6140 lm	152 lm/W
TRACKSPOT P 3PH 61 940 *MB ML BK DALI*	●	12-41 W	4000 K	2030-6480 lm	162 lm/W
TRACKSPOT P 3PH 60 940 *WB ML BK DALI*	●	12-41 W	4000 K	2030-6640 lm	163 lm/W
TRACKSPOT P 3PH 60 940 *VWB ML BK DALI*	●	12-41 W	4000 K	2020-6570 lm	162 lm/W
TRACKSPOT P 3PH 59 930 *MB ML WH DALI*	○	12-41 W	3000 K	1870-6040 lm	150 lm/W
TRACKSPOT P 3PH 59 930 *WB ML WH DALI*	○	12-41 W	3000 K	1880-6080 lm	152 lm/W
TRACKSPOT P 3PH 60 930 *VWB ML WH DALI*	○	12-41 W	3000 K	1880-6140 lm	152 lm/W
TRACKSPOT P 3PH 62 940 *MB ML HW DALI*	○	12-41 W	4000 K	2030-6480 lm	162 lm/W
TRACKSPOT P 3PH 61 940 *WB ML WH DALI*	○	12-41 W	4000 K	2030-6640 lm	163 lm/W
TRACKSPOT P 3PH 61 940 *VWB ML WH DALI*	○	12-41 W	4000 K	2020-6570 lm	162 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011789**	**220.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011790**	**220.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011791**	**220.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011792**	**220.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011793**	**220.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011794**	**220.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011795**	**220.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011796**	**220.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011797**	**220.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011798**	**220.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011799**	**220.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011800**	**220.00**

TRACKSPOT

INDOOR




TRACKSPOT P


Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT P 3PH. 58 930 *MB ML BK DALI SAN*	●	12-41 W	3000 K	1870-6040 lm	150 lm/W
TRACKSPOT P 3PH. 58 930 *WB ML BK DALI SAN*	●	12-41 W	3000 K	1880-6080 lm	152 lm/W
TRACKSPOT P 3PH. 59 930 *VWB ML BK DALI SAN*	●	12-41 W	3000 K	1880-6140 lm	152 lm/W
TRACKSPOT P 3PH. 61 940 *MB ML BK DALI SAN*	●	12-41 W	4000 K	2030-6480 lm	162 lm/W
TRACKSPOT P 3PH. 60 940 *WB ML BK DALI SAN*	●	12-41 W	4000 K	2030-6640 lm	163 lm/W
TRACKSPOT P 3PH. 60 940 *VWB ML BK DALI SAN*	●	12-41 W	4000 K	2020-6570 lm	162 lm/W
TRACKSPOT P 3PH. 59 930 *MB ML WH DALI SAN*	○	12-41 W	3000 K	1870-6040 lm	150 lm/W
TRACKSPOT P 3PH. 59 930 *WB ML WH DALI SAN*	○	12-41 W	3000 K	1880-6080 lm	152 lm/W
TRACKSPOT P 3PH. 60 930 *VWB ML WH DALI SAN*	○	12-41 W	3000 K	1880-6140 lm	152 lm/W
TRACKSPOT P 3PH. 62 940 *MB ML WH DALI SAN*	○	12-41 W	4000 K	2030-6480 lm	162 lm/W
TRACKSPOT P 3PH. 61 940 *WB ML WH DALI SAN*	○	12-41 W	4000 K	2030-6640 lm	163 lm/W
TRACKSPOT P 3PH. 61 940 *VWB ML WH DALI SAN*	○	12-41 W	4000 K	2020-6570 lm	162 lm/W



Retrofit solution for existing 3-phase track lighting systems: DALI Trackspot with adapter for standard 3-phase tracks, allowing use of the existing infrastructure without replacing the track. The DALI signal is transmitted via L2 and L3, thereby eliminating the need for phase selection.



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011127**	**220.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011128**	**220.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011129**	**220.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011130**	**220.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011131**	**220.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011132**	**220.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011133**	**220.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011134**	**220.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011135**	**220.00**
50 000 h L70B10	25	36°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011136**	**220.00**
50 000 h L70B10	25	47°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011137**	**220.00**
50 000 h L70B10	25	60°	90°	×	-20°C – 35°C	0,8 kg	Dali	✓	**1011138**	**220.00**

TRACKSPOT

INDOOR



Ø x H (mm):

85 x 42

Product description	Colour	Product no.	EUR
TRACKSPOT C/V *Replacement reflector NB*	○	**1011422**	**10.00**
TRACKSPOT C/V *Replacement reflector MB*	○	**1011423**	**10.00**
TRACKSPOT C/V *Replacement reflector VWB*	○	**1011424**	**10.00**

TRACKSPOT

INDOOR




TRACKSPOT P SQ

Mains voltage: 220-240 V ~0/50/60 Hz

IP20 IK02 CRI 90 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACKSPOT P SQ 3PH. 62 930 ML *WH*	○	12-40 W	3000 K	1850-6100 lm	161 lm/W
TRACKSPOT P SQ 3PH. 64 935 ML *WH*	○	12-40 W	3500 K	1970-6410 lm	170 lm/W
TRACKSPOT P SQ 3PH. 66 940 ML *WH*	○	12-40 W	4000 K	1990-6510 lm	172 lm/W
TRACKSPOT P SQ 3PH. 60 930 ML *DALI WH*	○	12-40 W	3000 K	1920-6260 lm	154 lm/W
TRACKSPOT P SQ 3PH. 61 935 ML *DALI WH*	○	12-40 W	3500 K	2050-6710 lm	165 lm/W
TRACKSPOT P SQ 3PH. 64 940 ML *DALI WH*	○	12-40 W	4000 K	2060-6670 lm	165 lm/W
TRACKSPOT P SQ 3PH. 62 930 ML *BK*	●	12-40 W	3000 K	1850-6100 lm	161 lm/W
TRACKSPOT P SQ 3PH. 64 935 ML *BK*	●	12-40 W	3500 K	1970-6410 lm	170 lm/W
TRACKSPOT P SQ 3PH. 66 940 ML *BK*	●	12-40 W	4000 K	1990-6510 lm	172 lm/W
TRACKSPOT P SQ 3PH. 60 930 ML *DALI BK*	●	12-40 W	3000 K	1920-6260 lm	154 lm/W
TRACKSPOT P SQ 3PH. 61 935 ML *DALI BK*	●	12-40 W	3500 K	2050-6710 lm	165 lm/W
TRACKSPOT P SQ 3PH. 64 940 ML *DALI BK*	●	12-40 W	4000 K	2060-6670 lm	165 lm/W



	UGR				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011510**	**220.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011511**	**220.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011512**	**220.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011513**	**250.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011514**	**250.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011515**	**250.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011516**	**220.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011517**	**220.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011518**	**220.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011519**	**250.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011520**	**250.00**
50 000 h L70B10	26	76°	90°	×	-20°C – 40°C	0,9 kg	Dali	✓	**1011521**	**250.00**

TRACK LINE

INDOOR




TRACK LINE S

Mains voltage: 220-240 V ~50/60 Hz

IP20 IK02 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACK LINE S 3PH. 40 830/835/840 DWB ML *WH*	○	14-24 W	3000 K	2400-3800 lm	171 lm/W
			3500 K	3000-4100 lm	179 lm/W
			4000 K	2500-4000 lm	179 lm/W
TRACK LINE S 3PH. 40 830/835/840 DWB ML *WH DALI*	○	15-24 W	3000 K	2400-3800 lm	160 lm/W
			3500 K	2500-4100 lm	171 lm/W
			4000 K	2500-4000 lm	167 lm/W
TRACK LINE S 3PH. 39 830/835/840 DWB ML *BK*	●	14-24 W	3000 K	2200-3700 lm	157 lm/W
			3500 K	2300-3900 lm	164 lm/W
			4000 K	2500-4000 lm	179 lm/W
TRACK LINE S 3PH. 39 830/835/840 DWB ML *BK DALI*	●	15-24 W	3000 K	2300-3600 lm	153 lm/W
			3500 K	2400-3800 lm	160 lm/W
			4000 K	2500-4000 lm	167 lm/W



				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	100 000 h L80B10	120°	×	-20°C – 40°C	0,7 kg	On/Off	×	**1011580**	**140.00**
	100 000 h L80B10	120°	×	-20°C – 40°C	0,7 kg	Dali	×	**1011581**	**190.00**
	100 000 h L80B10	120°	×	-20°C – 40°C	0,7 kg	On/Off	×	**1011582**	**190.00**
	100 000 h L80B10	120°	×	-20°C – 40°C	0,7 kg	Dali	×	**1011583**	**140.00**

TRACK LINE

INDOOR




TRACK LINE M

Mains voltage: 220-240 V ~50/60 Hz

IP20 IK02 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACK LINE M 3PH. 84 830/835/840 DWB ML *WH*	○	26-47 W	3000 K	4400-7500 lm	169 lm/W
			3500 K	4500-7900 lm	173 lm/W
			4000 K	4800-8300 lm	185 lm/W
TRACK LINE M 3PH. 84 830/835/840 DWB ML *WH DALI*	○	27-47 W	3000 K	4400-7400 lm	163 lm/W
			3500 K	4600-7800 lm	170 lm/W
			4000 K	4600-8000 lm	170 lm/W
TRACK LINE M 3PH. 80 830/835/840 DWB ML *BK*	●	26-47 W	3000 K	4300-7200 lm	165 lm/W
			3500 K	4400-7600 lm	169 lm/W
			4000 K	4600-8000 lm	177 lm/W
TRACK LINE M 3PH. 80 830/835/840 DWB ML *BK DALI*	●	27-47 W	3000 K	4300-7200 lm	159 lm/W
			3500 K	4400-7500 lm	163 lm/W
			4000 K	4600-8000 lm	170 lm/W



				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	100 000 h L80B10	120°	×	-20°C – 40°C	1,1 kg	On/Off	×	**1011588**	**180.00**
	100 000 h L80B10	120°	×	-20°C – 40°C	1,1 kg	Dali	×	**1011589**	**230.00**
	100 000 h L80B10	120°	×	-20°C – 40°C	1,1 kg	On/Off	×	**1011590**	**180.00**
	100 000 h L80B10	120°	×	-20°C – 40°C	1,1 kg	Dali	×	**1011591**	**230.00**

TRACK PANEL

INDOOR




TRACK PANEL

Mains voltage: 220-240 V ~50/60 Hz

IP20 IK02 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TRACK PANEL 3PH. 120 830/840 *DWB ML WH*	○	40/50/60/70 W	3000 K	6600-11200 lm	165 lm/W
			4000 K	7000-12000 lm	175 lm/W
TRACK PANEL 3PH. 120 830/840 *DWB ML BK*	●	40/50/60/70 W	3000 K	6600-11200 lm	165 lm/W
			4000 K	7000-12000 lm	175 lm/W
TRACK PANEL 3PH. 120 830/840 *DWB ML WH DALI*	○	39-68 W	3000 K	6600-11200 lm	169 lm/W
			4000 K	7000-12000 lm	179 lm/W
TRACK PANEL 3PH. 120 830/840 *DWB ML BK DALI*	●	39-68 W	3000 K	7000-11600 lm	179 lm/W
			4000 K	7000-12000 lm	179 lm/W




				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	120°	×		-20°C – 40°C	2,8 kg	On/Off	×	**1011392**	**250.00**
100 000 h L80B10	120°	×		-20°C – 40°C	2,8 kg	On/Off	×	**1011394**	**250.00**
100 000 h L80B10	120°	×		-20°C – 40°C	2,9 kg	Dali	×	**1011396**	**310.00**
100 000 h L80B10	120°	×		-20°C – 40°C	2,9 kg	Dali	×	**1011398**	**310.00**

S-TRACK

3-PHASE SURFACE-MOUNTED TRACK ON/OFF








	100 cm	100 cm	200 cm	200 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● Black	○ White	● Black	○ White
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 x 3.6 x 3.6	100 x 3.6 x 3.6	200 x 3.6 x 3.6	200 x 3.6 x 3.6
Prod. no.	**175010**	**1001375**	**175020**	**1001376**

	300 cm	300 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
max. current (A)	16 A max.	16 A max.
max. mech. load	30 kg	30 kg
Colour	● Black	○ White
Material	Aluminium	Aluminium
L x W x H (cm)	300 x 3.6 x 3.6	300 x 3.6 x 3.6
Prod. no.	**175030**	**1001377**


Further information and current prices can be found at **slv.com** and in the latest issue of BIG WHITE®. For all S-TRACK track systems and the associated accessories, the prices and conditions of the BIG WHITE® portfolio apply.

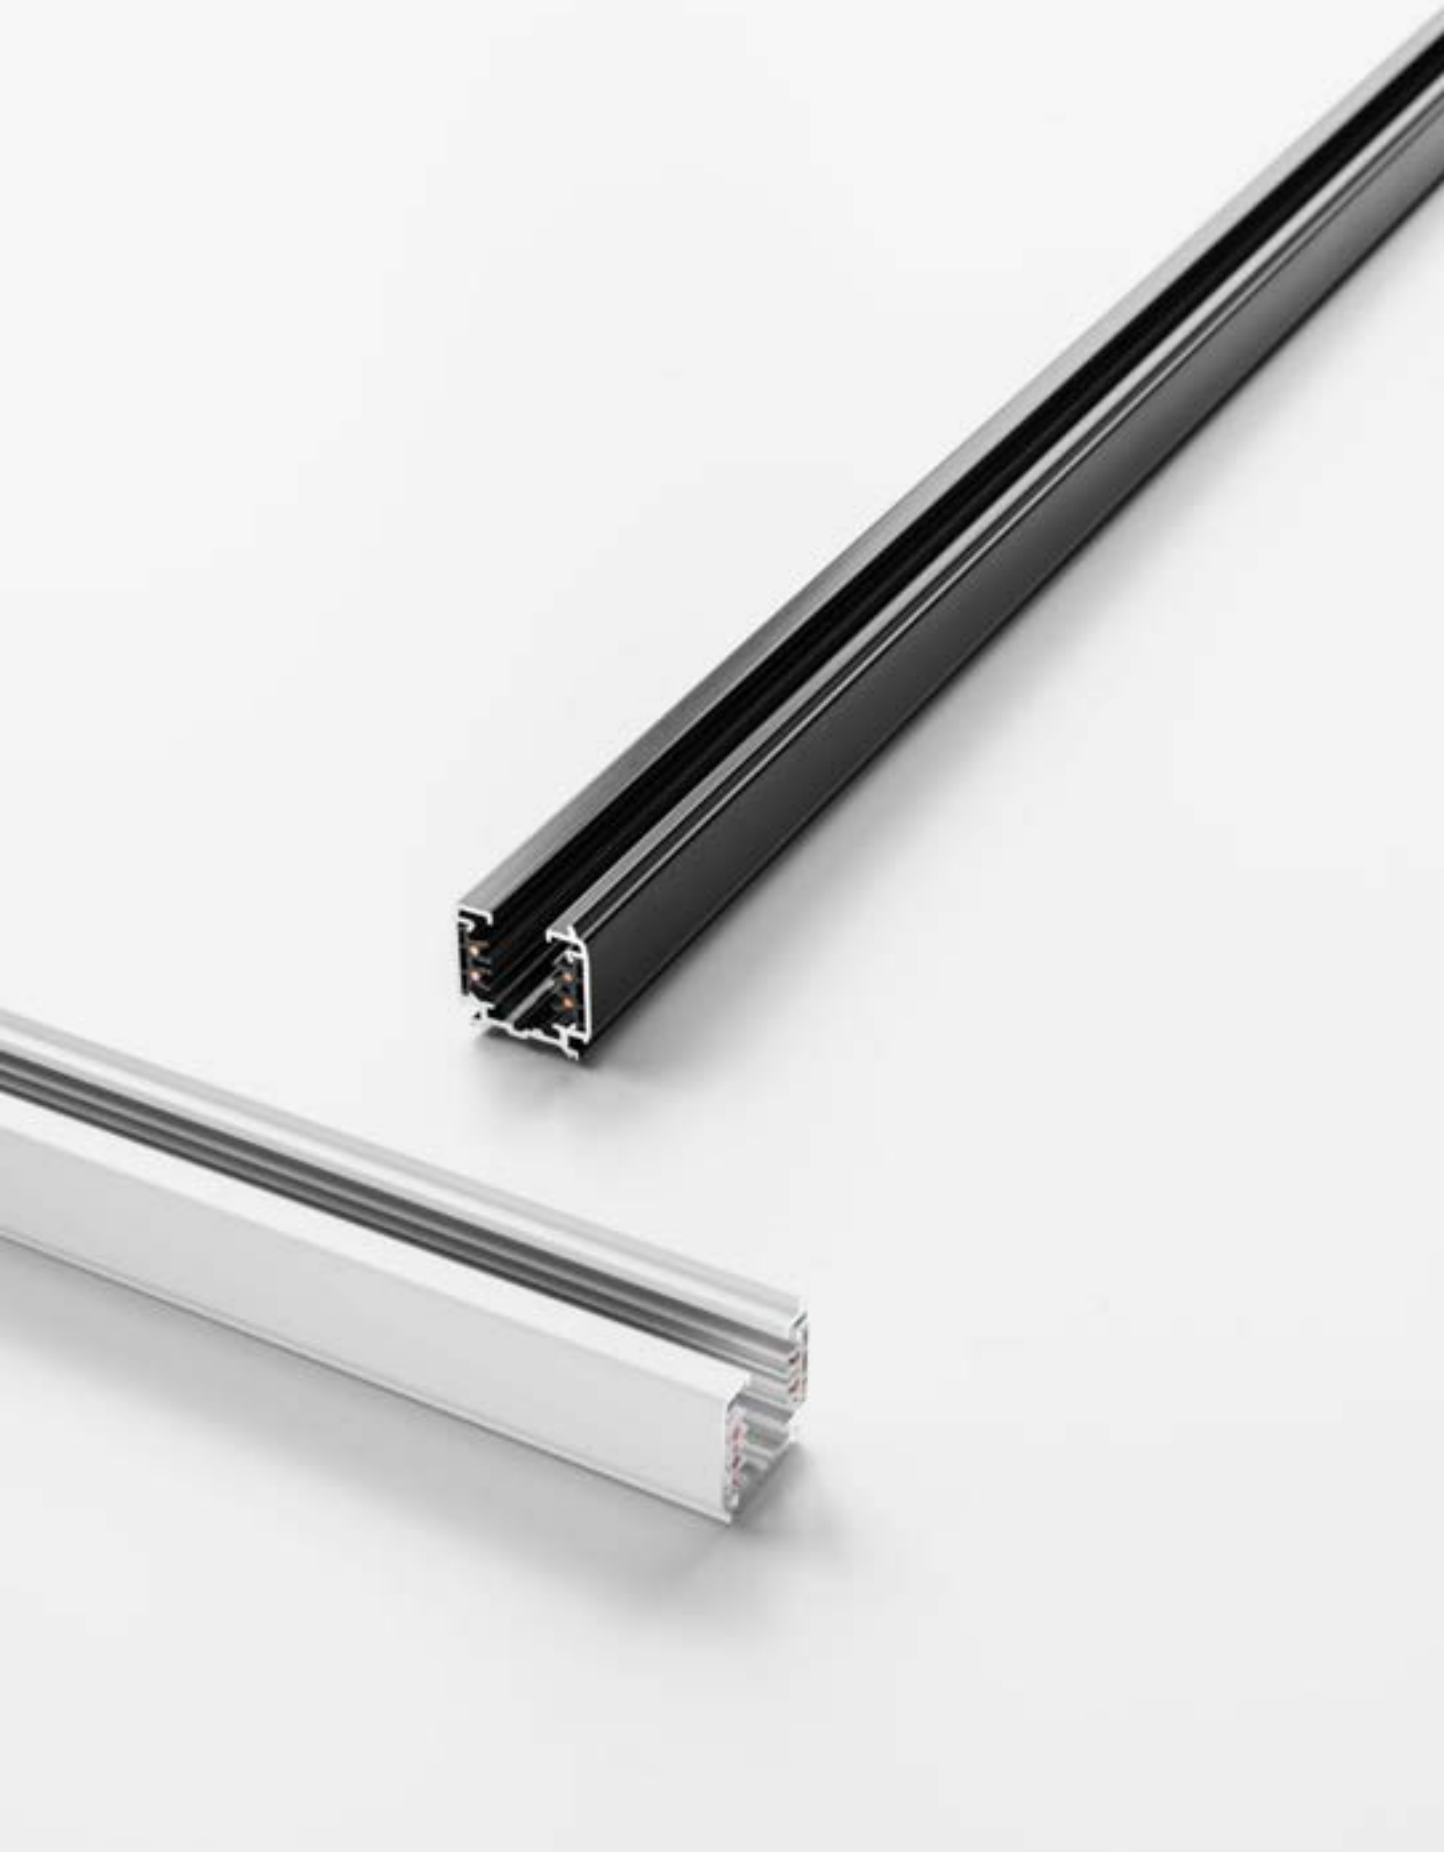

S-TRACK

3-PHASE SURFACE-MOUNTED TRACK ON/OFF
PLANNING TOOL AND ACCESSORIES AT A GLANCE

View of components from above on the installation side

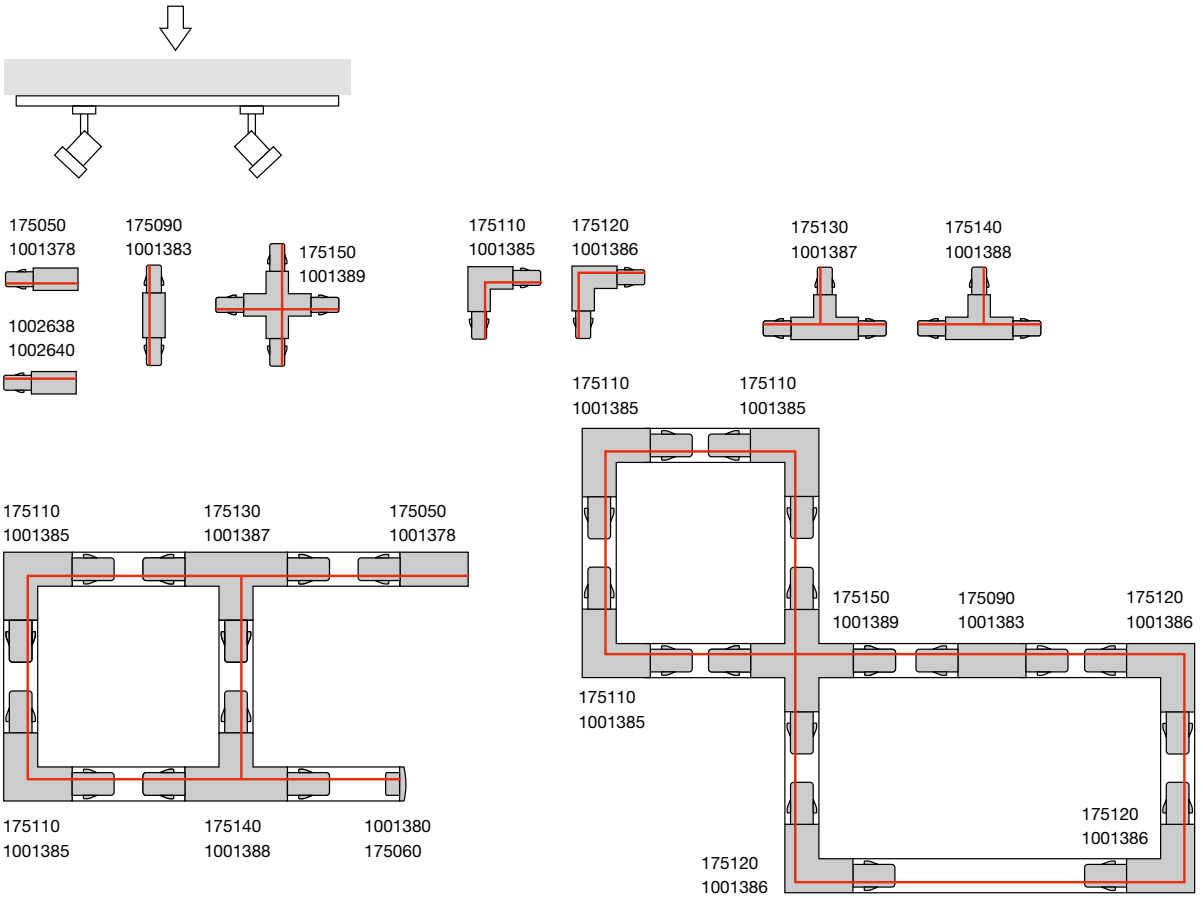



T-connector, On/Off, left, with feed-in option

16 A max. | polycarbonate (PC)
L: 10 cm | W: 6.7 cm | H: 3.3 cm

● Black	Prod. no.	**175130**	**36.90 EUR**
○ White	Prod. no.	**1001387**	**36.90 EUR**



T-connector, On/Off, right, with feed-in option

16 A max. | polycarbonate (PC)
L: 10 cm | W: 6.7 cm | H: 3.3 cm

● Black	Prod. no.	**175140**	**36.90 EUR**
○ White	Prod. no.	**1001388**	**36.90 EUR**



L-connector, On/Off, earth outside

16 A max. | polycarbonate (PC)
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm

● Black	Prod. no.	**175120**	**29.90 EUR**
○ White	Prod. no.	**1001386**	**29.90 EUR**



L-connector, On/Off, earth inside

16 A max. | polycarbonate (PC)
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm

● Black	Prod. no.	**175110**	**29.90 EUR**
○ White	Prod. no.	**1001385**	**29.90 EUR**



Feed-in, On/Off, earth left

16 A max. | polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

● Black	Prod. no.	**175050**	**16.90 EUR**
○ White	Prod. no.	**1001378**	**16.90 EUR**



Feed-in, On/Off, earth right

16 A max. | polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

● Black	Prod. no.	**175040**	**17.90 EUR**
○ White	Prod. no.	**1001379**	**17.90 EUR**



X-connector, On/Off

16 A max. | polycarbonate (PC)
L: 10 cm | W: 10 cm | H: 3.3 cm

● Black	Prod. no.	**175150**	**52.90 EUR**
○ White	Prod. no.	**1001389**	**52.90 EUR**



Mini-insulating connector

16 A max. | Plastic
L: 6.8 cm | W: 3.10 cm | H: 2.6 cm

● Black	Prod. no.	**175080**	**7.99 EUR**
○ White	Prod. no.	**1001382**	**7.99 EUR**



Longitudinal connector, On/Off

16 A max. | polycarbonate (PC)
L: 9.9 cm | W: 3.5 cm | H: 3.3 cm

● Black	Prod. no.	**175090**	**29.90 EUR**
○ White	Prod. no.	**1001383**	**29.90 EUR**



Mini-connector, On/Off

16 A max. | polycarbonate (PC)
L: 6.8 cm | W: 2 cm | H: 2 cm

● Black	Prod. no.	**175070**	**10.90 EUR**
○ White	Prod. no.	**1001381**	**10.90 EUR**



Flex connector, On/Off

16 A max. | polycarbonate (PC)
L: 16.2 cm | W: 3.5 cm | H: 3.3 cm

● Black	Prod. no.	**175100**	**44.90 EUR**
○ White	Prod. no.	**1001384**	**44.90 EUR**



3-phase Adapter, On/Off

16 A max. | polycarbonate (PC)
L: 8.4 cm | W: 5.5 cm | H: 3.3 cm

● Black	Prod. no.	**175200**	**17.90 EUR**
○ White	Prod. no.	**1001394**	**17.90 EUR**



Pendant clip

4 cm | Steel
L: 4 cm | W: 3.40 cm | H: 1.25 cm

● Black	Prod. no.	**1002657**	**7.99 EUR**
○ White	Prod. no.	**1002658**	**7.99 EUR**



Cover, 2m

200 cm | Polycarbonate (PC)
L: 200 cm | W: 2.20 cm | H: 0.75 cm

● Black	Prod. no.	**1004939**	**7.89 EUR**
○ White	Prod. no.	**1004940**	**7.89 EUR**



Mech. 3-phase Adapter

6.6 cm | Aluminium/Plastic
L: 6.6 cm | W: 6.60 cm | H: 3.1 cm

● Black	Prod. no.	**175210**	**16.90 EUR**
○ White	Prod. no.	**1001395**	**16.90 EUR**

Pendant suspension

6 cm | Aluminium/Plastic
L: 6 cm | W: 6.00 cm | H: 4 cm

● Black	Prod. no.	**175160**	**33.90 EUR**
○ White	Prod. no.	**1001390**	**33.90 EUR**



End cap

3,5 cm | Plastic
L: 3.5 cm | W: 3.30 cm | H: 3.2 cm

● Black	Prod. no.	**175060**	**2.09 EUR**
○ White	Prod. no.	**1001380**	**2.09 EUR**



Mech. 3-phase Adaptor with hook

5 kg max. | Plastic/Steel
H: 5.2 cm

● Black	Prod. no.	**175190**	**2.89 EUR**
○ White	Prod. no.	**1001393**	**2.89 EUR**



Joint connector

18.2 cm | Aluminium
L: 18.2 cm | W: 3.30 cm | H: 2.1 cm

● Black	Prod. no.	**175180**	**12.90 EUR**
○ White	Prod. no.	**1001392**	**12.90 EUR**



EUTRACK®, S-TRACK and single-phase tracks, 5 m, set of two

500cm | Stainless steel/Brass
L: 500cm

● Nickel	Prod. no.	**1002845**	**43.90 EUR**




Ceiling Rose, phase & DALI

Polycarbonate (PC)
H: 3.5 cm

● Black	Prod. no.	**1004684**	**39.90 EUR**
○ White	Prod. no.	**1004685**	**39.90 EUR**

S-TRACK

3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI





	100 cm	100 cm	200 cm	200 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● Black	○ White	● Black	○ White
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 x 3.6 x 3.6	100 x 3.6 x 3.6	200 x 3.6 x 3.6	200 x 3.6 x 3.6
Prod. no.	**1004937**	**1004938**	**1002631**	**1002632**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● Black	○ White	● Black	○ White
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 x 3.6 x 3.6	300 x 3.6 x 3.6	400 x 3.6 x 3.6	400 x 3.6 x 3.6
Prod. no.	**1002633**	**1002634**	**1002635**	**1002636**


Further information and current prices can be found at **slv.com** and in the latest issue of BIG WHITE®. For all S-TRACK track systems and the associated accessories, the prices and conditions of the BIG WHITE® portfolio apply.





S-TRACK


3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI PLANNING TOOL AND ACCESSORIES AT A GLANCE


View of components from above on the installation side

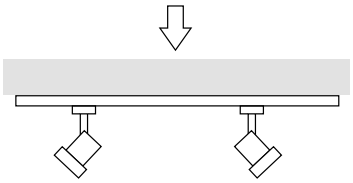


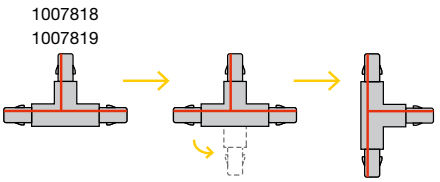


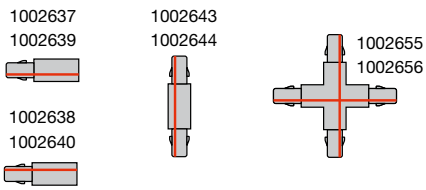





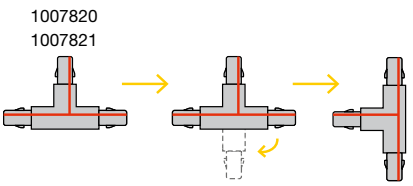

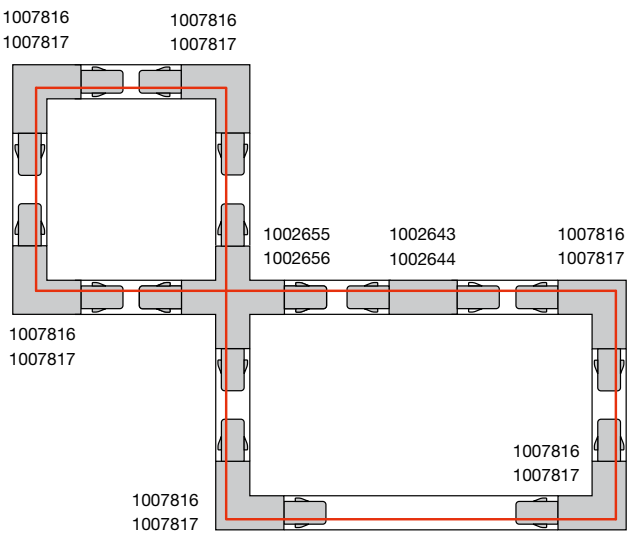

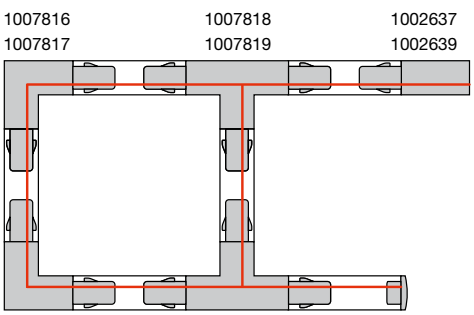







T-connector, Phase & DALI, adjustable, left, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.90 cm | H: 3.3 cm

● Black	Prod. no.	**1007818**	**40.90 EUR**
○ White	Prod. no.	**1007819**	**40.90 EUR**



T-connector, Phase & DALI, adjustable, right, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.90 cm | H: 3.3 cm


● Black	Prod. no.	**1007820**	**40.90 EUR**
○ White	Prod. no.	**1007821**	**40.90 EUR**



L-connector, Phase & DALI, adjustable, with feed-in option

16 A max. | polycarbonate (PC)
L: 11.9 cm | W: 11.90 cm | H: 3.3 cm

● Black	Prod. no.	**1007816**	**34.90 EUR**
○ White	Prod. no.	**1007817**	**34.90 EUR**





Feed-in, Phase & DALI, earth left

16 A max. | polycarbonate (PC)
L: 13.9 cm | W: 3.50 cm | H: 3.3 cm

● Black	Prod. no.	**1002637**	**19.90 EUR**
○ White	Prod. no.	**1002639**	**19.90 EUR**



Feed-in, Phase & DALI, earth right

16 A max. | polycarbonate (PC)
L: 13.9 cm | W: 3.50 cm | H: 3.3 cm

● Black	Prod. no.	**1002638**	**19.90 EUR**
○ White	Prod. no.	**1002640**	**19.90 EUR**



X-connector, Phase & DALI

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 20.30 cm | H: 3.3 cm

● Black	Prod. no.	**1002655**	**65.90 EUR**
○ White	Prod. no.	**1002656**	**65.90 EUR**



Longitudinal connector, Phase & DALI

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 3.50 cm | H: 3.3 cm

● Black	Prod. no.	**1002643**	**34.90 EUR**
○ White	Prod. no.	**1002644**	**34.90 EUR**



Mini-insulating connector

16 A max. | Plastic
L: 6.8 cm | W: 3.10 cm | H: 2.6 cm

● Black	Prod. no.	**175080**	**7.99 EUR**
○ White	Prod. no.	**1001382**	**7.99 EUR**



Flex connector, Phase & DALI

16 A max. | polycarbonate (PC)
L: 28.5 cm | W: 3.50 cm | H: 3.3 cm

● Black	Prod. no.	**1002645**	**56.90 EUR**
○ White	Prod. no.	**1002646**	**56.90 EUR**



Mini-connector, Phase & DALI

16 A max. | polycarbonate (PC)
L: 10.6 cm | W: 2.50 cm | H: 2.8 cm

● Black	Prod. no.	**1002641**	**10.90 EUR**
○ White	Prod. no.	**1002642**	**10.90 EUR**



Pendant clip

4 cm | Steel
L: 4 cm | W: 3.40 cm | H: 1.25 cm

● Black	Prod. no.	**1002657**	**7.99 EUR**
○ White	Prod. no.	**1002658**	**7.99 EUR**



3-Phase Adapter, DALI

16 A max. | polycarbonate (PC)
L: 11.3 cm | W: 5.50 cm | H: 3.3 cm

● Black	Prod. no.	**1002660**	**19.90 EUR**
○ White	Prod. no.	**1002659**	**19.90 EUR**



Mech. 3-Phase Adapter

6.6 cm | Aluminium/Plastic
L: 6.6 cm | W: 6.60 cm | H: 3.1 cm

● Black	Prod. no.	**175210**	**16.90 EUR**
○ White	Prod. no.	**1001395**	**16.90 EUR**



Cover, 2m

200 cm | Polycarbonate (PC)
L: 200 cm | W: 2.20 cm | H: 0.75 cm

● Black	Prod. no.	**1004939**	**7.89 EUR**
○ White	Prod. no.	**1004940**	**7.89 EUR**



End cap

3,5 cm | Plastic
L: 3.5 cm | W: 3.30 cm | H: 3.2 cm

● Black	Prod. no.	**175060**	**2.09 EUR**
○ White	Prod. no.	**1001380**	**2.09 EUR**

Pendant suspension

6 cm | Aluminium/Plastic
L: 6 cm | W: 6.00 cm | H: 4 cm

● Black	Prod. no.	**175160**	**33.90 EUR**
○ White	Prod. no.	**1001390**	**33.90 EUR**



Joint connector

18.2 cm | Aluminium
L: 18.2 cm | W: 3.30 cm | H: 2.1 cm

● Black	Prod. no.	**175180**	**12.90 EUR**
○ White	Prod. no.	**1001392**	**12.90 EUR**



Mech. 3-Phase Adaptor with hook

5 kg max. | Plastic/Steel
H: 5.2 cm

● Black	Prod. no.	**175190**	**2.89 EUR**
○ White	Prod. no.	**1001393**	**2.89 EUR**



Ceiling rosette, Phase & DALI

Polycarbonate (PC)
H: 3.5 cm

● Black	Prod. no.	**1004684**	**39.90 EUR**
○ White	Prod. no.	**1004685**	**39.90 EUR**



EUTRACK®, S-TRACK and single-phase tracks, 5 m, set of two


500 cm | Stainless steel/Brass
L: 500 cm

● nickel	Prod. no.	**1002845**	**43.90 EUR**

S-TRACK

3-PHASE RECESSED TRACK PHASE & DALI





	100 cm	100 cm	200 cm	200 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● Black	○ White	● Black	○ White
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 x 5.6 x 3.55	100 x 5.6 x 3.55	200 x 5.6 x 3.55	200 x 5.6 x 3.55
Prod. no.	**1006511**	**1006512**	**1006513**	**1006514**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● Black	○ White	● Black	○ White
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 x 5.6 x 3.55	300 x 5.6 x 3.55	400 x 5.6 x 3.55	400 x 5.6 x 3.55
Prod. no.	**1006515**	**1006516**	**1006517**	**1006518**


Further information and current prices can be found at **slv.com** and in the latest issue of BIG WHITE®. For all S-TRACK track systems and the associated accessories, the prices and conditions of the BIG WHITE® portfolio apply.





S-TRACK


3-PHASE RECESSED TRACK PHASE & DALI
PLANNING TOOL AND ACCESSORIES AT A GLANCE

View of components from above on the installation side

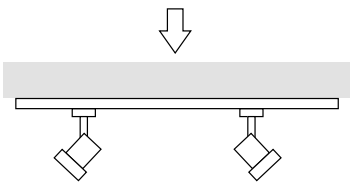

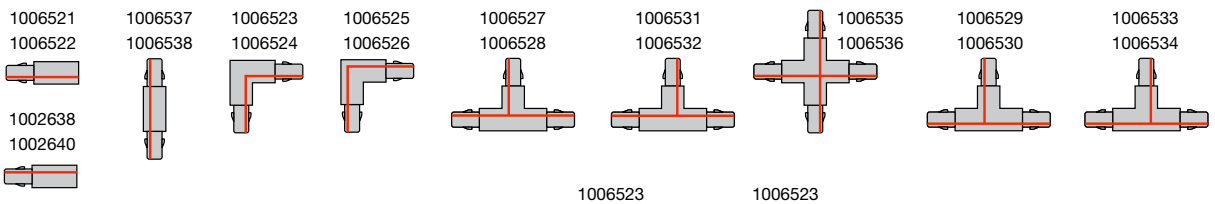

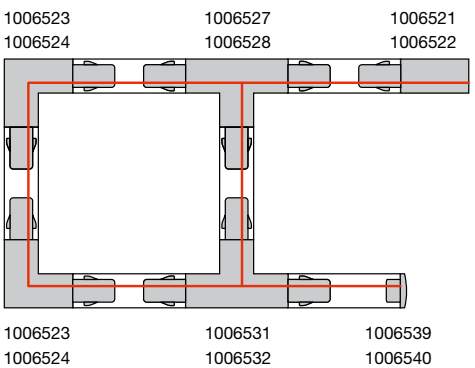

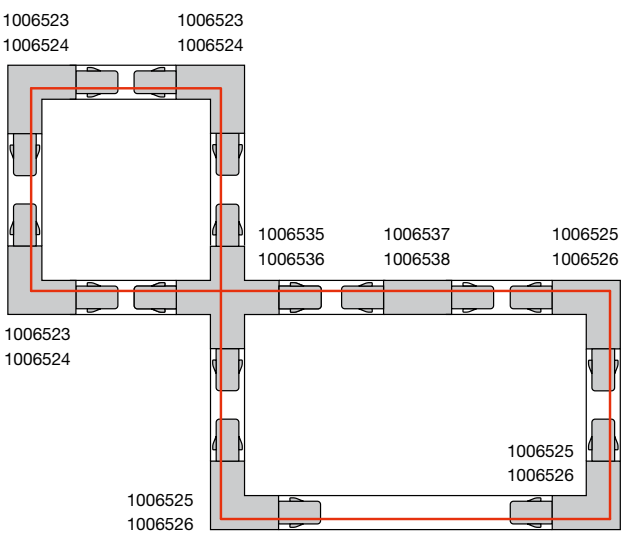



Feed-in, Phase & DALI, earth left

16 A max. | polycarbonate (PC)
L: 14.7 cm | W: 5.60 cm | H: 3.3 cm

● Black	Prod. no.	**1006521**	**25.90 EUR**
○ White	Prod. no.	**1006522**	**25.90 EUR**



PFeed-in, phase & DALI, earth right

16 A max. | polycarbonate (PC)
L: 14.7 cm | W: 5.60 cm | H: 3.3 cm

● Black	Prod. no.	**1006519**	**25.90 EUR**
○ White	Prod. no.	**1006520**	**25.90 EUR**



L-connector, Phase & Dali, internal earth, with feed-in option

16 A max. | polycarbonate (PC)
L: 13 cm | W: 13.00 cm | H: 3.3 cm

● Black	Prod. no.	**1006523**	**34.90 EUR**
○ White	Prod. no.	**1006524**	**34.90 EUR**



L-connector, Phase & Dali, external earth, with feed-in option

16 A max. | polycarbonate (PC)
L: 13 cm | W: 13.00 cm | H: 3.3 cm

● Black	Prod. no.	**1006525**	**34.90 EUR**
○ White	Prod. no.	**1006526**	**34.90 EUR**



T-connector, Phase & Dali, internal earth right, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13.00 cm | H: 3.3 cm

● Black	Prod. no.	**1006529**	**40.90 EUR**
○ White	Prod. no.	**1006530**	**40.90 EUR**



T-connector, Phase & Dali, internal earth right, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13.00 cm | H: 3.3 cm

● Black	Prod. no.	**1006531**	**40.90 EUR**
○ White	Prod. no.	**1006532**	**40.90 EUR**



T-connector, Phase & Dali,external earth left, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13.00 cm | H: 3.3 cm

● Black	Prod. no.	**1006527**	**40.90 EUR**
○ White	Prod. no.	**1006528**	**40.90 EUR**



T-connector, Phase & Dali, external earth left, with feed-in option

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13.00 cm | H: 3.3 cm

● Black	Prod. no.	**1006533**	**40.90 EUR**
○ White	Prod. no.	**1006534**	**40.90 EUR**



X-CONNECTOR

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 20.30 cm | H: 3.3 cm

● Black	Prod. no.	**1006535**	**65.90 EUR**
○ White	Prod. no.	**1006536**	**65.90 EUR**



Longitudinal connector, Phase & DALI

16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 5.60 cm | H: 3.3 cm

● Black	Prod. no.	**1006537**	**34.90 EUR**
○ White	Prod. no.	**1006538**	**34.90 EUR**



Mini-connector, Phase & DALI

16 A max. | polycarbonate (PC)
L: 10.6 cm | W: 2.50 cm | H: 2.8 cm

● Black	Prod. no.	**1002641**	**10.90 EUR**
○ White	Prod. no.	**1002642**	**10.90 EUR**



End cap, for 3-phase recessed track

Polycarbonate (PC)
L: 4.8 cm | W: 5.60 cm

● Black	Prod. no.	**1006539**	**2.09 EUR**
○ White	Prod. no.	**1006540**	**2.09 EUR**



3-phase Adapter, DALI

16 A max. | polycarbonate (PC)
L: 11.3 cm | W: 5.50 cm | H: 3.3 cm

● Black	Prod. no.	**1002660**	**19.90 EUR**
○ White	Prod. no.	**1002659**	**19.90 EUR**

SURFACE

INDOOR




SURFACE V

Mains voltage: 220-240 V ~50/60 Hz

IP44 IK02 CRI 80 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
SURFACE V 390 *10/15/20W 830/840 IP44*	○	20 W	3000 K	930-1850 lm	93 lm/W
			4000 K	1000-2000 lm	100 lm/W
SURFACE V 390 *10/15/20W 830/840 IP44 S*	○	20 W	3000 K	930-1850 lm	93 lm/W
			4000 K	1000-2000 lm	100 lm/W



				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	50 000 h L80B10	120°	✓	-20°C – 40°C	0,8 kg	On/Off	✗	**1007516**	**50.00**
	50 000 h L80B10	120°	✓	-20°C – 40°C	0,8 kg	On/Off	✗	**1007517**	**65.00**

HIGHBAY

INDOOR




HIGHBAY 330

Mains voltage: 220-240 V ~50/60 Hz

IP65 IK08 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
HB 330 *100/120/170/200W 840 90° IP65*	●	200 W	4000 K	17000-32000 lm	170 lm/W



			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L80B50	90°	×	-40°C – 40°C	2,3 kg	On/Off	×	**1007679**	**235.00**



Ø x H (mm):
435 x 130



Ø x L (mm):
19,2 x 1500



L x W x H (mm):
202,5 x 49,6 x 132

Product description	Colour	Product no.	EUR
HB *SUSPENSION CHAIN 1500*		**1007676**	**24.00**
HB 330 *REFLECTOR 100°*		**1007677**	**50.00**
HB 330 *MOUNTING BRACKET 60° ADJUSTMENT*		**1007678**	**24.00**

HIGHBAY

INDOOR



HIGHBAY C 340

Mains voltage: 220-240 V ~50/60 Hz

IP65 IK08 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
HIGHBAY C 340 *60/80/100W 840 IP65*	●	55/78/100 W	4000 K	9700-17500 lm	175 lm/W
HIGHBAY C 400 *120/160/200W 840 IP65*	●	120/160/200 W	4000 K	21450-35000 lm	178 lm/W
HIGHBAY C DALI 400 *200W 840 IP65*	●	200 W	4000 K	35000 lm	175 lm/W



L x W x H (mm):
250 x 40 x 33




Ø x H (mm):
413 x 176



Ø x H (mm):
480 x 185


Product description	Colour	Product no.	EUR
HIGHBAY C *U-BRACKET*	○	**1008528**	**14.50**
HIGHBAY C 340 *PC-REFLECTOR*	○	**1008529**	**69.00**
HIGHBAY C 400 *PC-REFLECTOR*	○	**1008530**	**89.00**

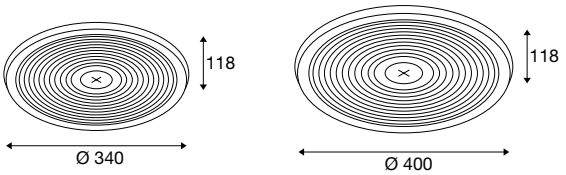



	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
70 000 h L80B10	22	90°	×	-30°C – 50°C	2,8 kg	On/Off	×	**1008525**	**269.00**
70 000 h L80B10	22	90°	×	-30°C – 50°C	3,3 kg	On/Off	×	**1008526**	**299.00**
70 000 h L80B10	22	90°	×	-30°C – 50°C	3,4 kg	Dali	×	**1008527**	**349.00**



Product description	Colour	Product no.	EUR
HIGHBAY C *HF SENSOR*	○	**1008531**	**49.00**
HIGHBAY C *PIR SENSOR*	○	**1008532**	**49.00**
HIGHBAY C *REMOTE*	○	**1008575**	**49.00**
HIGHBAY C *CASAMBI MODULE*	○	**1008576**	**129.00**

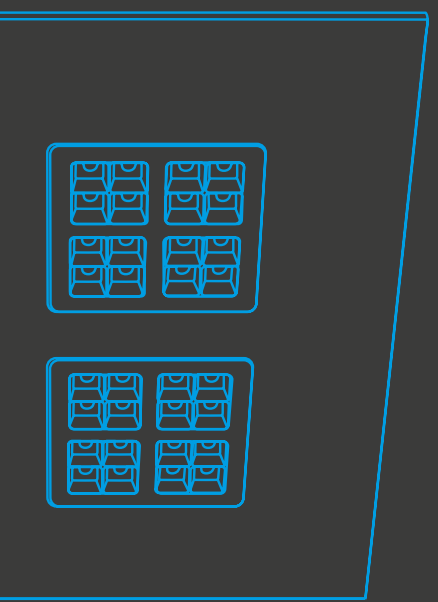

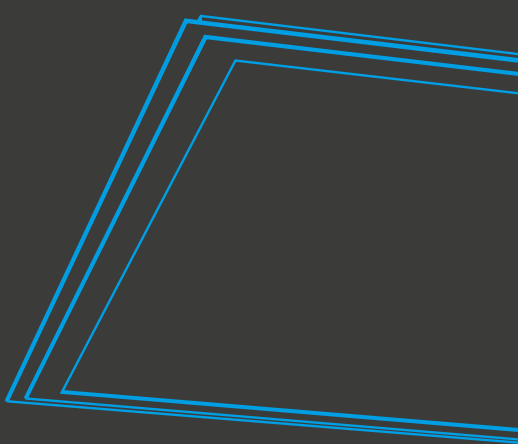

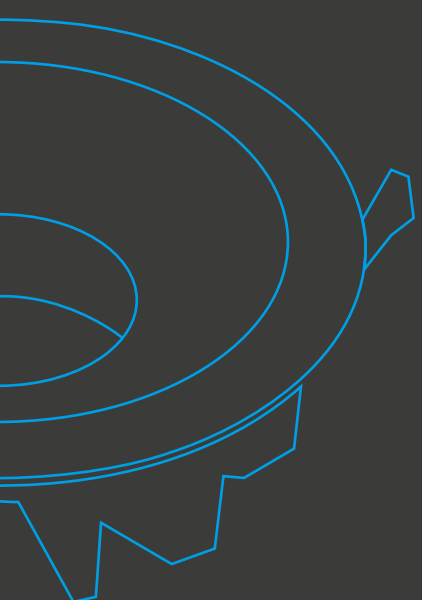

COMBINE

PANEL V / C / P, PAVANNO or
DOWNLIGHT V / C / P



PAVANNO

+



LED EMERGENCY KIT

=



PAVANNO with emergency lighting

LED EMERGENCY KIT

3 hours
Emergency mode

PRODUCT ADVANTAGES

Simple integration into compatible LED lights for additional emergency lighting functions.

Automatic switchover to battery power in the event of a mains power failure.

Emergency lighting operation for **3> hours** to ensure reliable safety lighting.

Self-test function for automatically checking the batteries operation.

Compact design for flexible installation in fixtures or false ceilings.

Constant output power of 2–3 W for reliable operation in emergency mode



LED EMERGENCY KIT

Mains voltage: 220-240 V ~50/60 Hz

IP20

Product description	Colour	Product no.	EUR
LED EMERGENCY KIT DC 10-50V 3W *220-240VAC*	○	**1011668**	**155.00**

BULKHEAD

OUTDOOR




OUTDOOR BULKHEAD V

Mains voltage: 220-240 V ~0/50/60 Hz

IP65 IK10 CRI 80 MULTI COLOR

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
OUTDOOR BULKHEAD V 360 *20W 830/840 IP65 IK10*	●	20 W	3000 K	1750 lm	87 lm/W
			4000 K	1850 lm	92 lm/W
			6500 K	1900 lm	95 lm/W
OUTDOOR BULKHEAD V 360 *20W 830/840 IP65 IK10 S*	●	20 W	3000 K	1750 lm	87 lm/W
			4000 K	1850 lm	92 lm/W
			6500 K	1900 lm	95 lm/W
OUTDOOR BULKHEAD V 360 *20W 830/840 IP65 IK10*	○	20 W	3000 K	1750 lm	87 lm/W
			4000 K	1850 lm	92 lm/W
			6500 K	1900 lm	95 lm/W
OUTDOOR BULKHEAD V 360 *20W 830/840 IP65 IK10 S*	○	20 W	3000 K	1750 lm	87 lm/W
			4000 K	1850 lm	92 lm/W
			6500 K	1900 lm	95 lm/W



				Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	50 000 h L80B50	110°	×	-20°C – 45°C	2,4 kg	On/Off	✓	**1007514**	**85.00**
	50 000 h L80B50	110°	×	-20°C – 45°C	2,4 kg	On/Off	✓	**1007515**	**110.00**
	50 000 h L80B50	110°	×	-20°C – 45°C	2,4 kg	On/Off	✓	**1008833**	**85.00**
	50 000 h L80B50	110°	×	-20°C – 45°C	2,4 kg	On/Off	✓	**1008901**	**110.00**

FLOODLIGHT

OUTDOOR





FLOODLIGHT C

Mains voltage: 100-240 V ~0/50/60 Hz

IP66 IK08 CRI 80 MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
FLOODLIGHT C *50/75/100W 830 IP66*	●	50/80/100 W	3000 K	8000-15300 lm	160 lm/W
FLOODLIGHT C *50/75/100W 840 IP66*	●	50/80/100 W	4000 K	8450-16300 lm	169 lm/W
FLOODLIGHT C *100/150/200W 830 IP66*	●	100/150/200 W	3000 K	16300-30800 lm	163 lm/W
FLOODLIGHT C *100/150/200W 840 IP66*	●	100/150/200 W	4000 K	17000-32400 lm	170 lm/W





			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
80 000 h L80B10	70/105°	×	-30°C – 45°C	3,6 kg	On/Off	✓	**1008907**	**359.00**
80 000 h L80B10	70/105°	×	-30°C – 45°C	3,6 kg	On/Off	✓	**1008908**	**359.00**
80 000 h L80B10	70/105°	×	-30°C – 45°C	5,1 kg	On/Off	×	**1008909**	**459.00**
80 000 h L80B10	70/105°	×	-30°C – 45°C	5,1 kg	On/Off	×	**1008910**	**459.00**



L x W x H (mm):
266 x 92 x 104



L x W x H (mm):
266 x 115 x 104



L x W x H (mm):
200 x 50 x 40



L x W x H (mm):
260 x 50 x 50





Ø x H (mm):
27,5 x 43




L x W x H (mm):
125 x 70 x 25


Product description	Colour	Product no.	EUR
FLOODLIGHT C *POLE MOUNT 60*	●	**1008911**	**115.00**
FLOODLIGHT C *POLE MOUNT 76*	●	**1008912**	**130.00**
FLOODLIGHT C *MOUNTING BRACKET SMALL*	●	**1008913**	**60.00**
FLOODLIGHT C *MOUNTING BRACKET LARGE*	●	**1008914**	**80.00**
FLOODLIGHT C *PIR SENSOR*	○	**1008915**	**90.00**
FLOODLIGHT C *REMOTE CONTROL FOR PIR SENSOR*	●	**1008916**	**70.00**

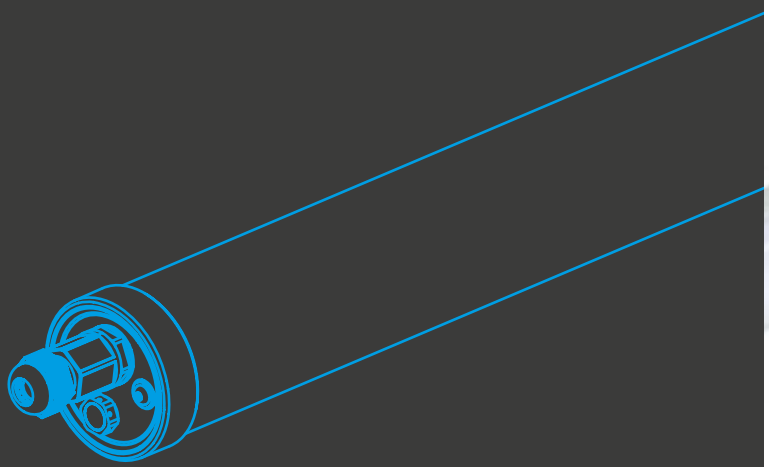

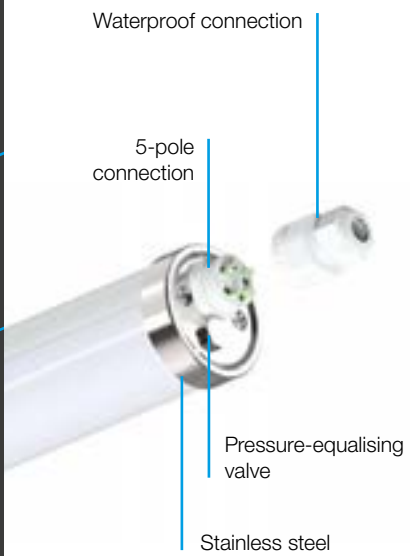
Waterproof connection
5-pole connection
Pressure-equalising valve
Stainless steel

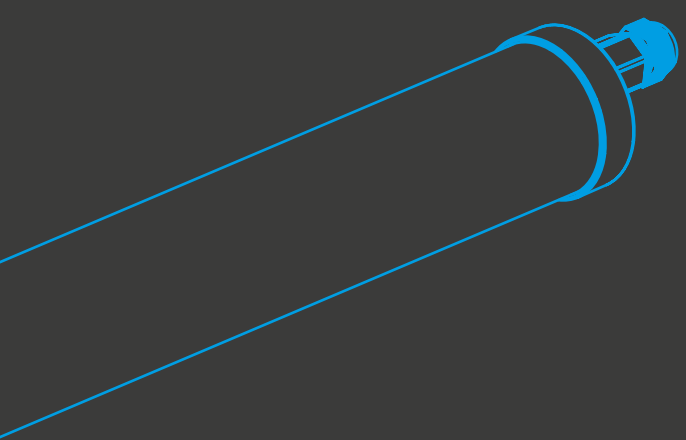


Clear PMMA + WB 90°
IP66 / IP69K / IK07

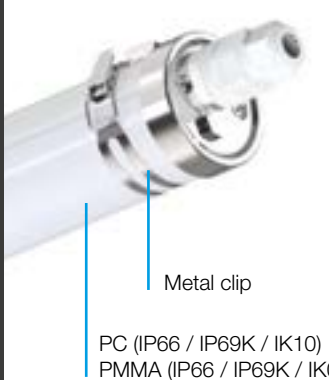
Metal clip
PC (IP66 / IP69K / IK10)
PMMA (IP66 / IP69K / IK07)

TUBULAR

IP69K & HACCP

PRODUCT ADVANTAGES

High durability in demanding environments thanks to protection ratings **IP66** (DIN EN 60529) and **IP69K** (ISO 20653:2013).

Resistant to high-pressure cleaning **up to 100 bar** and temperatures **up to 80 °C**.

Suitable for areas with strict hygiene requirements thanks to **HACCP-compliant design**.


Halogen-free - environmentally friendly and safe.

Long lifespan of up to **100,000 h** for reliable and low-maintenance lighting.

High energy efficiency with light output efficacy of up to **170 lm/W**.

Resistant to Ammonia and therefore suitable for use in agriculture and livestock farming.

Flexible lighting solutions thanks to a range of optics and beam angles for different applications.

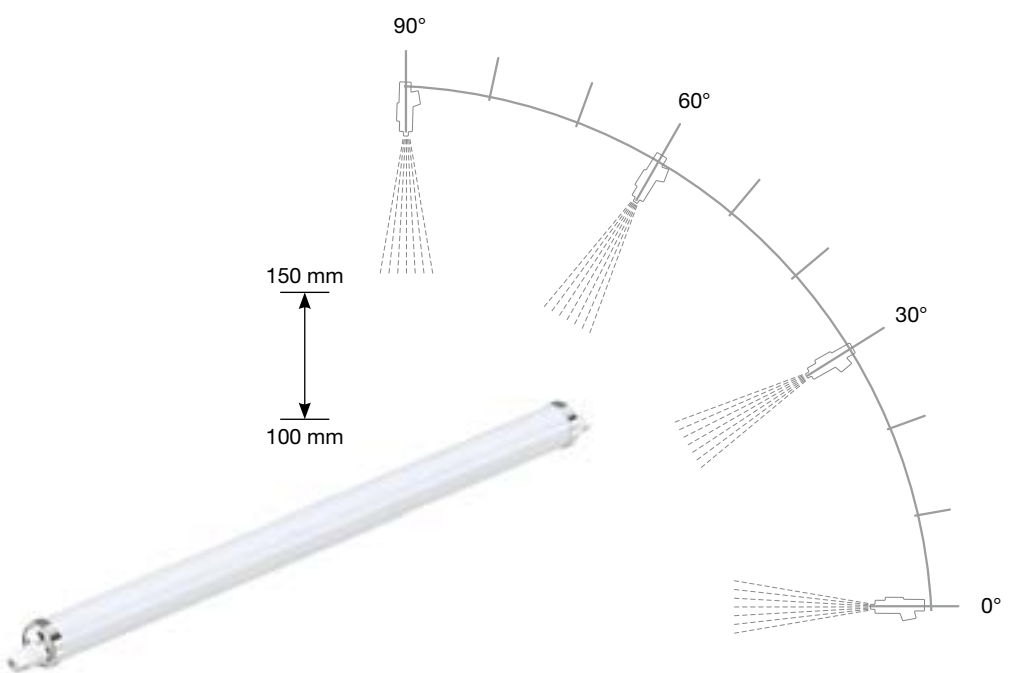

TUBULAR

OUTDOOR




TUBULAR P

Mains voltage: 220-240 V ~0/50/60 Hz

IP66/ IP69K · IK07 · CRI 80

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TUBULAR P 1200 530 830 *WH DALI2 OPL PMMA*	○	35 W	3000 K	5600 lm	160 lm/W
TUBULAR P 1200 560 840 *WH DALI2 OPL PMMA*	○	35 W	4000 K	5900 lm	169 lm/W
TUBULAR P 1200 560 850 *WH DALI2 OPL PMMA*	○	35 W	5000 K	6000 lm	171 lm/W
TUBULAR P 1200 470 830 *WH DALI2 OPL PC*	○	35 W	3000 K	5000 lm	143 lm/W
TUBULAR P 1200 500 840 *WH DALI2 OPL PC*	○	35 W	4000 K	5200 lm	148 lm/W
TUBULAR P 1200 500 850 *WH DALI2 OPL PC*	○	35 W	5000 K	5300 lm	151 lm/W



	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	27	120°	✕	-20°C – 40°C	1,5 kg	Dali	✓	**1011474**	**230.00**
100 000 h L80B10	27	120°	✕	-20°C – 40°C	1,5 kg	Dali	✓	**1011475**	**230.00**
100 000 h L80B10	27	120°	✕	-20°C – 40°C	1,5 kg	Dali	✓	**1011476**	**230.00**
100 000 h L80B10	27	120°	✕	-20°C – 40°C	1,5 kg	Dali	✓	**1011523**	**230.00**
100 000 h L80B10	27	120°	✕	-20°C – 40°C	1,5 kg	Dali	✓	**1011524**	**230.00**
100 000 h L80B10	27	120°	✕	-20°C – 40°C	1,5 kg	Dali	✓	**1011525**	**230.00**





L (mm):	Ø (mm):
2000	75

Product description	Colour	Product no.	EUR
TUBULAR P SUSPENSION KIT *2M 2PCS.*	○	**1011504**	**13.00**
TUBULAR P SURFACE MOUNTING *BRACKET/RUBBER 2PCS.*	●○	**1011505**	**13.00**

TUBULAR

OUTDOOR




TUBULAR P

Mains voltage: 220-240 V ~0/50/60 Hz

IP66/IP69K IK07 CRI 80

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
TUBULAR P 1500 760 830 *WH DALI2 OPL PMMA*	○	50 W	3000 K	7900 lm	158 lm/W
TUBULAR P 1500 800 840 *WH DALI2 OPL PMMA*	○	50 W	4000 K	8400 lm	168 lm/W
TUBULAR P 1500 800 850 *WH DALI2 OPL PMMA*	○	50 W	5000 K	8500 lm	170 lm/W
TUBULAR P 1500 880 830 *WH DALI2 CLR PMMA*	○	50 W	3000 K	9000 lm	180 lm/W
TUBULAR P 1500 930 840 *WH DALI2 CLR PMMA*	○	58 W	4000 K	9600 lm	165 lm/W
TUBULAR P 1500 930 850 *WH DALI2 CLR PMMA*	○	58 W	5000 K	9700 lm	167 lm/W
TUBULAR P 1500 680 830 *WH DALI2 OPL PC*	○	50 W	3000 K	7500 lm	150 lm/W
TUBULAR P 1500 720 840 *WH DALI2 OPL PC*	○	50 W	4000 K	7500 lm	150 lm/W
TUBULAR P 1500 720 850 *WH DALI2 OPL PC*	○	50 W	5000 K	7600 lm	152 lm/W



	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	Dali	✓	**1011477**	**260.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	Dali	✓	**1011478**	**260.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	Dali	✓	**1011479**	**260.00**
100 000 h L80B10	27	90°	×	-20°C – 40°C	2 kg	Dali	✓	**1011480**	**280.00**
100 000 h L80B10	27	90°	×	-20°C – 40°C	2 kg	Dali	✓	**1011481**	**280.00**
100 000 h L80B10	27	90°	×	-20°C – 40°C	2 kg	Dali	✓	**1011522**	**280.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	Dali	✓	**1011526**	**250.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	Dali	✓	**1011527**	**250.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	Dali	✓	**1011528**	**250.00**





L (mm):	Ø (mm):
2000	75

Product description	Colour	Product no.	EUR
TUBULAR P SUSPENSION KIT *2M 2PCS.*	○	**1011504**	**13.00**
TUBULAR P SURFACE MOUNTING *BRACKET/RUBBER 2PCS.*	●○	**1011505**	**13.00**

WATERPROOF

OUTDOOR




WATERPROOF V

Mains voltage: 220-240 V ~50/60 Hz

IP65 IK08 CRI 80

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
WATERPROOF V EASY 1200 *43 840 ML IP65*	○	35 W	4000 K	2700-4300 lm	135 lm/W
WATERPROOF V EASY 1500 *63 840 ML IP65*	○	48 W	4000 K	3900-6300 lm	144 lm/W

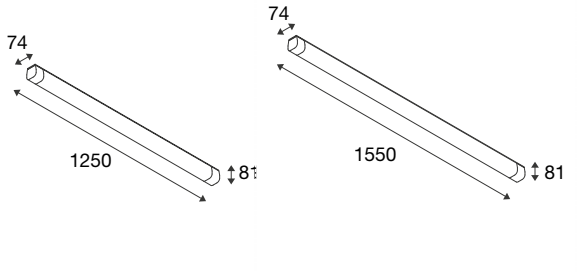

			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
50 000 h L70B50	130°	✓	-20°C – 40°C	1,1 kg	On/Off	✗	**1009172**	**55.00**
50 000 h L70B50	130°	✓	-20°C – 40°C	1,2 kg	On/Off	✗	**1009173**	**67.00**

WATERPROOF

OUTDOOR




WATERPROOF C

Mains voltage: 220-240 V ~0/50/60 Hz

IP66 IK08 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting Luminous flux
WATERPROOF C 1200 57 830/840/850 *ML IP66*	●	21-38 W	3000 K	3250-5520 lm	155 lm/W	–
			4000 K	3510-6130 lm	167 lm/W	
			5000 K	3490-5900 lm	166 lm/W	
WATERPROOF C 1200 57 830/840/850 *ML EM 3H IP66*	●	21-38 W	3000 K	3250-5520 lm	155 lm/W	450 lm
			4000 K	3510-6130 lm	167 lm/W	450 lm
			5000 K	3490-5900 lm	166 lm/W	470 lm
WATERPROOF C 1200 57 830/840/850 *ML HF IP66*	●	21-38 W	3000 K	3250-5520 lm	155 lm/W	–
			4000 K	3510-6130 lm	167 lm/W	
			5000 K	3490-5900 lm	166 lm/W	
WATERPROOF C 1200 57 830/840/850 *ML HF EM 3H IP66*	●	21-38 W	3000 K	3250-5520 lm	155 lm/W	450 lm
			4000 K	3510-6130 lm	167 lm/W	450 lm
			5000 K	3490-5900 lm	166 lm/W	470 lm
WATERPROOF C 1200 57 830/840/850 *ML DALI IP66*	●	21-38 W	3000 K	3250-5520 lm	155 lm/W	–
			4000 K	3510-6130 lm	167 lm/W	
			5000 K	3490-5900 lm	166 lm/W	
WATERPROOF C 1200 57 830/840/850 *ML DALI EM 3H IP66*	●	21-38 W	3000 K	3250-5520 lm	155 lm/W	450 lm
			4000 K	3510-6130 lm	167 lm/W	450 lm
			5000 K	3490-5900 lm	166 lm/W	470 lm





	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
75 000 h L80B10	27	120°	×	-20°C – 40°C	1,5 kg	On/Off	✓	**1010809**	**83.00**
75 000 h L80B10	27	120°	×	-20°C – 40°C	1,9 kg	On/Off	✓	**1010810**	**159.00**
75 000 h L80B10	27	120°	×	-20°C – 40°C	1,5 kg	On/Off	✓	**1010811**	**112.00**
75 000 h L80B10	27	120°	×	-20°C – 40°C	1,9 kg	On/Off	✓	**1010812**	**184.00**
75 000 h L80B10	27	120°	×	-20°C – 40°C	1,6 kg	Dali	✓	**1010817**	**126.00**
75 000 h L80B10	27	120°	×	-20°C – 40°C	2 kg	Dali	✓	**1010818**	**203.00**

WATERPROOF

OUTDOOR




WATERPROOF C

Mains voltage: 220-240 V ~0/50/60 Hz
Emergency lighting total wattage: 3 W

IP66 IK08 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting Luminous flux
WATERPROOF C 1500 71 830/840/850 *ML IP66*	●	26-47 W	3000 K	4100-6900 lm	157 lm/W	–
			4000 K	4420-7680 lm	170 lm/W	
			5000 K	4390-7380 lm	168 lm/W	
WATERPROOF C 1500 71 830/840/850 *ML EM 3H IP66*	●	26-47 W	3000 K	4100-6900 lm	157 lm/W	450 lm
			4000 K	4420-7680 lm	170 lm/W	450 lm
			5000 K	4390-7380 lm	168 lm/W	470 lm
WATERPROOF C 1500 71 830/840/850 *ML HF IP66*	●	26-47 W	3000 K	4100-6900 lm	157 lm/W	–
			4000 K	4420-7680 lm	170 lm/W	
			5000 K	4390-7380 lm	168 lm/W	
WATERPROOF C 1500 71 830/840/850 *ML HF EM 3H IP66*	●	26-47 W	3000 K	4100-6900 lm	157 lm/W	450 lm
			4000 K	4420-7680 lm	170 lm/W	450 lm
			5000 K	4390-7380 lm	168 lm/W	470 lm
WATERPROOF C 1500 71 830/840/850 *ML DALI IP66*	●	26-47 W	3000 K	4100-6900 lm	157 lm/W	–
			4000 K	4420-7680 lm	170 lm/W	
			5000 K	4390-7380 lm	168 lm/W	
WATERPROOF C 1500 71 830/840/850 *ML DALI EM 3H IP66*	●	26-47 W	3000 K	4100-6900 lm	157 lm/W	450 lm
			4000 K	4420-7680 lm	170 lm/W	450 lm
			5000 K	4390-7380 lm	168 lm/W	470 lm



		UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	75 000 h L80B10	27	120°	✕	-20°C – 40°C	1,8 kg	On/Off	✓	**1010813**	**102.00**
	75 000 h L80B10	27	120°	✕	-20°C – 40°C	2,1 kg	On/Off	✓	**1010814**	**179.00**
	75 000 h L80B10	27	120°	✕	-20°C – 40°C	1,8 kg	On/Off	✓	**1010815**	**132.00**
	75 000 h L80B10	27	120°	✕	-20°C – 40°C	2,2 kg	On/Off	✓	**1010816**	**204.00**
	75 000 h L80B10	27	120°	✕	-20°C – 40°C	1,8 kg	Dali	✓	**1010819**	**146.00**
	75 000 h L80B10	27	120°	✕	-20°C – 40°C	2,2 kg	Dali	✓	**1010820**	**222.00**

WATERPROOF

OUTDOOR




WATERPROOF P

Mains voltage: 220-240 V ~0/50/60 Hz
Emergency lighting total wattage: 3 W

IP66 IK08 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting Luminous flux
WATERPROOF P 1200 65 830/840/850 *ML IP66*	●	21-38 W	3000 K	3350-5850 lm	167 lm/W	–
			4000 K	3530-6280 lm	176 lm/W	
			5000 K	3580-6250 lm	179 lm/W	
WATERPROOF P 1200 65 830/840/850 *ML EM 3H IP66*	●	21-38 W	3000 K	3350-5850 lm	167 lm/W	450 lm
			4000 K	3530-6280 lm	176 lm/W	450 lm
			5000 K	3580-6250 lm	179 lm/W	470 lm
WATERPROOF P 1200 65 830/840/850 *ML HF IP66*	●	21-38 W	3000 K	3350-5850 lm	167 lm/W	–
			4000 K	3530-6280 lm	176 lm/W	
			5000 K	3580-6250 lm	179 lm/W	
WATERPROOF P 1200 65 830/840/850 *ML HF EM 3H IP66*	●	21-38 W	3000 K	3350-5850 lm	167 lm/W	450 lm
			4000 K	3530-6280 lm	176 lm/W	450 lm
			5000 K	3580-6250 lm	179 lm/W	470 lm
WATERPROOF P 1200 65 830/840/850 *ML DALI IP66*	●	21-38 W	3000 K	3350-5850 lm	167 lm/W	–
			4000 K	3530-6280 lm	176 lm/W	
			5000 K	3580-6250 lm	179 lm/W	
WATERPROOF P 1200 65 830/840/850 *ML DALI EM 3H IP66*	●	21-38 W	3000 K	3350-5850 lm	167 lm/W	450 lm
			4000 K	3530-6280 lm	176 lm/W	450 lm
			5000 K	3580-6250 lm	179 lm/W	470 lm





	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,5 kg	On/Off	✓	**1010821**	**97.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,9 kg	On/Off	✓	**1010822**	**173.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,5 kg	On/Off	✓	**1010823**	**126.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,9 kg	On/Off	✓	**1010824**	**198.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,6 kg	Dali	✓	**1010829**	**140.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	2 kg	Dali	✓	**1010830**	**216.00**

WATERPROOF

OUTDOOR




WATERPROOF P

Mains voltage: 220-240 V ~0/50/60 Hz
Emergency lighting total wattage: 3 W

IP66 IK08 MULTI COLOR MULTI LUMEN

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)	Emergency lighting Luminous flux
WATERPROOF P 1500 81 830/840/850 *ML IP66*	●	26-48 W	3000 K	4430-7560 lm	170 lm/W	–
			4000 K	4660-8120 lm	179 lm/W	
			5000 K	4730-8070 lm	182 lm/W	
WATERPROOF P 1500 81 830/840/850 *ML EM 3H IP66*	●	26-48 W	3000 K	4430-7560 lm	170 lm/W	450 lm
			4000 K	4660-8120 lm	179 lm/W	450 lm
			5000 K	4730-8070 lm	182 lm/W	470 lm
WATERPROOF P 1500 81 830/840/850 *ML HF IP66*	●	26-48 W	3000 K	4430-7560 lm	170 lm/W	–
			4000 K	4660-8120 lm	179 lm/W	
			5000 K	4730-8070 lm	182 lm/W	
WATERPROOF P 1500 81 830/840/850 *ML HF EM 3H IP66*	●	26-48 W	3000 K	4430-7560 lm	170 lm/W	450 lm
			4000 K	4660-8120 lm	179 lm/W	450 lm
			5000 K	4730-8070 lm	182 lm/W	470 lm
WATERPROOF P 1500 81 830/840/850 *ML DALI IP66*	●	26-47 W	3000 K	4430-7560 lm	170 lm/W	–
			4000 K	4660-8120 lm	179 lm/W	
			5000 K	4730-8070 lm	182 lm/W	
WATERPROOF P 1500 81 830/840/850 *ML DALI EM 3H IP66*	●	26-47 W	3000 K	4430-7560 lm	170 lm/W	450 lm
			4000 K	4660-8120 lm	179 lm/W	450 lm
			5000 K	4730-8070 lm	182 lm/W	470 lm



	UGR			Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	On/Off	✓	**1010825**	**120.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	2,1 kg	On/Off	✓	**1010826**	**197.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	On/Off	✓	**1010827**	**150.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	2,2 kg	On/Off	✓	**1010828**	**223.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	1,8 kg	Dali	✓	**1010831**	**163.00**
100 000 h L80B10	27	120°	×	-20°C – 40°C	2,2 kg	Dali	✓	**1010832**	**240.00**

STREET A

OUTDOOR




STREET A

Mains voltage: 220-240 V ~0/50/60 Hz

IP66 IK09 CRI 70

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
STREET A MICRO 52 730 *LENS906**	●	35 W	3000 K	5250 lm	150 lm/W
STREET A MINI 135 730 *LENS906**	●	90 W	3000 K	13500 lm	150 lm/W
STREET A MIDI 180 730 *LENS906**	●	120 W	3000 K	18000 lm	150 lm/W
STREET A MAXI 240 730 *LENS906**	●	160 W	3000 K	24000 lm	150 lm/W

*LENS906 refers to the lens optimised for car park applications.



					Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	100 000 h L80B50	140°	35°	×	-40°C – 50°C	3,6 kg	On/Off	✓	**1011739**	**350.00**
	100 000 h L80B50	140°	35°	×	-40°C – 50°C	5,8 kg	On/Off	✓	**1011740**	**445.00**
	100 000 h L80B50	140°	35°	×	-40°C – 50°C	6 kg	On/Off	✓	**1011741**	**630.00**
	100 000 h L80B50	140°	35°	×	-40°C – 50°C	8,5 kg	On/Off	✓	**1011742**	**700.00**

STREET A

OUTDOOR




STREET A

Mains voltage: 220-240 V ~0/50/60 Hz

IP66 IK09 CRI 70

Product description	Colour	Total wattage (min. – max.)	Colour temperature	Luminous flux (min. – max.)	Efficiency (max.)
STREET A MICRO 52 740 *LENS906**	●	35 W	4000 K	5250 lm	150 lm/W
STREET A MINI 135 740 *LENS906**	●	90 W	4000 K	13500 lm	150 lm/W
STREET A MIDI 180 740 *LENS906**	●	120 W	4000 K	18000 lm	150 lm/W
STREET A MAXI 240 740 *LENS906**	●	160 W	4000 K	24000 lm	150 lm/W

*LENS906 refers to the lens optimised for car park applications.




					Ambient temperature	Weight	Control	DC-compatible	Product no.	EUR
	100 000 h L80B50	140°	35°	✕	-40°C – 50°C	3,6 kg	On/Off	✓	**1011743**	**350.00**
	100 000 h L80B50	140°	35°	✕	-40°C – 50°C	5,8 kg	On/Off	✓	**1011744**	**445.00**
	100 000 h L80B50	140°	35°	✕	-40°C – 50°C	6 kg	On/Off	✓	**1011745**	**630.00**
	100 000 h L80B50	140°	35°	✕	-40°C – 50°C	8,5 kg	On/Off	✓	**1011746**	**700.00**

COLOUR EXPLANATION



Black



White



aluminium




Grey



Dark Grey

KEY TO SYMBOLS



Protection classes:


· Protection class I / Protective conductor
Protection class II / Protection by double or reinforced insulation



IP protection rating



IK impact resistance rating



Half-diffusion angle:

Describes the beam angle in degrees.
The smaller the angle, the more concentrated the light will be.



Pivoting capacity in degrees:



Luminous flux maintenance



Unified Glare Rating:

The lower the UGR value, the lower the psychological glare.



Describes the colour rendering quality of a light source.
The higher the CRI value, the more natural and true-to-life the colours appear.



Through-wiring possible



Enables wireless control of the light fitting via compatible control systems or mobile devices.



Fire-retardant: developed and tested for use in certain fire-retardant suspended ceilings. Fire protection application (up to 90 minutes, tested with EN 1365-2:2014, Fire resistance tests for load-bearing components – Part 2: Ceilings and roofs'). Outdoor use and fire protection applications (up to 90 minutes, BS476-20:1987 and BS476-21:1987)



Can be installed in insulation.
Can be covered with many types of thermal insulation materials.

MULTI LUMEN

The Multi-Lumen function enables gradual adjustment of the light output, allowing you to tailor the lighting to suit your needs.

MULTI COLOR

Multi-Colour describes the ability of a light to produce different light colours. For lights with adjustable Multi-Colour, the light colour can be adjusted using a switch.

This is technically achieved by installing multiple LED chips of different colours. By changing the switch status, the proportion of the respective LEDs is adjusted to produce the desired light colour.

Many of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. Product descriptions and specifications are subject to correction and amendment.
All products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country-specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes.

The presentation of our lights with realistic photos showing them in use is possible thanks to the kind cooperation and agreement of the owners or designers of the environments depicted in the images. We would like to take this opportunity to thank all those who consented to having photos taken and used.

The publication of this catalogue invalidates the prices specified in previous lists and catalogues. SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value-added tax or procurement prices.

All prices are recommended retail prices (RRP) and indicated in EUR without VAT.

Publisher
SLV GmbH, Germany
Daimlerstrasse 21-23
52531 Übach-Palenberg
T +49 (0) 2451 4833 - 0
slv.com

Copyright
© SLV GmbH, 2026

KS Licht – Din grossist inden for belysning i Essen

Kontakt, service og oplysninger til kunder
SLVtes 2026

I direkte forbindelse med sortiment, rådgivning og projektservice

I KS Multi Brand Business' onlinebutik finder du aktuelle produkter, nyheder og tilbud samt oplysninger, der kan hjælpe dig med rådgivning, tilbud og projektgennemførelse:

- Online-kontrol af varernes tilgængelighed
- Kataloger, bladkataloger og produktlinks
- Tekniske data, udbudstekster, lysfordelingskurver og LDT-filer
- Nemt at finde og bestille reservedele
- Visning af dine individuelle betingelser samt leverings- og betalingsbetingelser
- Relevante produktanbefalinger, varianter og alternative produkter
- Direkte kontakt til vores salgsteam

Kundeoplysninger

Alle priser er netto eksklusive lovpligtig moms. De angivne salgspriser er vejledende priser. Med udgivelsen af dette katalog mister tidligere prislister deres gyldighed.
Illustrationer, farver, former, udførelser og tekniske data er kun til illustrative formål og er ikke bindende.
Forbehold for ændringer og fejl.
Forsendelse sker generelt frit værk.
Ved bestillinger med en nettovareværdi under 70,00 € opkræves et tillæg for små mængder på 8,00 €.

Bestilling og levering

Angiv altid varenummer,
farve og antal ved bestillinger. Det mindsker behovet for yderligere henvendelser og fremskynder behandlingen af bestillingen.
Ekspres- og direkte leveringer er mulige efter anmodning.
Specialfremstillede varer, komponenter sammensat efter kundens ønske samt lamper kan ikke byttes.
Vores generelle forretningsbetingelser gælder og kan findes på www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-lys.dk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411



KS Licht- und Elektrotechnik GmbH

Manderscheidtstraße 8 c
45141 Essen

Tel.: +49 (0)201-89924-0
E-Mail: verkauf@ks-germany.com

Onlineshop: ks-lys.dk
Internet: www.ks-germany.com

